
UNCONTROLLED DOCUMENT

Ø4.00 [Ø0.157] -

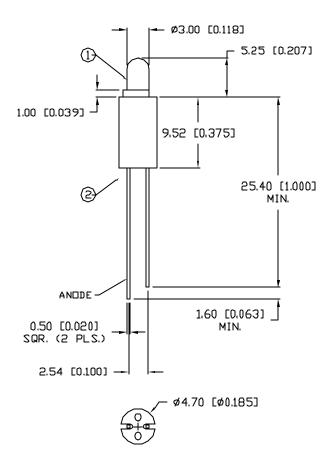

PART NUMBER SSS-LX3054ID-375B

REV.

	REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
١	Α	E.C.N. #11148.	02.20.07

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA							
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND		
PEAK WAVELENGTH		635 (RED)		nm			
FORWARD VOLTAGE		2.0	2.5	V_f			
reverse voltage	5.0			٧r	I _r =100μΑ		
AXIAL INTENSITY		30		med	If=20mA		
VIEWING ANGLE		60		2x theta			
EMITTED COLOR:	RED						
EPOXY LENS FINISH:	RED DI	FFUSED					

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS	
PEAK FORWARD CURRENT*	150	mA	
STEADY CURRENT	30	mA	
POWER DISSIPATION	105	mW	
DERATE FROM 25°C	- 1.6	mW/°C	
OPERATING, STORAGE TEMP.	-40 TO +85	°C	
SOLDERING TEMP.	+ 260	°C	
2.0mm FROM BODY		3 SEC. MAX	
* t<10µS			

NOTES:

- 1, SSL-LX3054ID LED, RED.
- 2. SSS-LX375B5, BLACK SPACER.

UNCONTROLLED DOCUMENT

REV. PART NUMBER SSS-LX3054ID-375B

> T-3mm (T-1) LED, 635nm RED LED, RED DIFFUSED LENS, WITH 0.375" SPACER.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

 $\begin{array}{c} \underline{\text{Relablity Note}} \\ \text{Our nany years of experience data accumulation indicate that} \end{array}$ SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:	CHECKED	BY:	APPROVED	BY:	DATE:	6.29.99
					PAGE:	1 OF 1
JC					SCALE:	N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSS-LX3054ID-375B