


UNCONTROLLED DOCUMENT



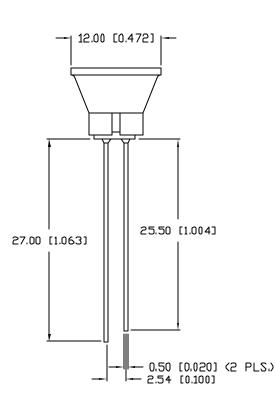

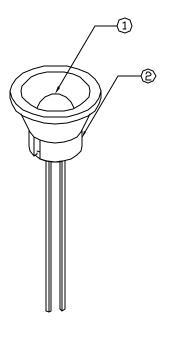

SC:0.50	PART NUMBER
	SSI-LXR5093AD

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR, & REDRAWN,	6.27.02

UNDER REVISION

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA						
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		605		nm	_	
FORWARD VOLTAGE		2.1	2.8	Vf		
reverse voltage	5.0			٧ _٢	I _r = 100μΑ	
AXIAL INTENSITY		30		mcd	$I_f = 20mA$	
VIEWING ANGLE		80		2x theta		
EMITTED COLOR:	AMBER					
EPOXY LENS FINISH:	AMBER	DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C PER DIE

MAX	UNITS
150	mA
30	mA
105	mW
- 1.2	mW/°C
- 40 TO + 85	•c
+ 260	' C
	3 SEC. MAX
	150 30 105 - 1.2 - 40 TO +85

^{\$}ىر10>¢ *

NOTES:

- SSL-LX5093AD.
- 2. SSR-LX2450 REFLECTOR.

PART NUMBER

A SSI-LXR5093AD

T-1 3/4 AMBER DIFFUSED LED,

WITH CHROME PLATED REFLECTOR,

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEP MALL INFORMATION CONTAINED HOREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCOLUSINE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABLITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067–6976 PHONE: +1.847.359.2790 US WFB: www.lumex.com

US WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 1.27.95
PAGE: 1 OF 1
GB SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSI-LXR5093AD