
## UNCONTROLLED DOCUMENT

## PART NUMBER LDS-A322RF

REV.	E.C.N.	NUMBER	AND	REVISION	COMMENTS	DATE
Α	F.C.N.	#10BRDB	2. &	RFDRAWN	IN 3D.	3.23.03

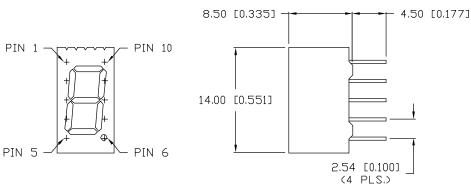

		4.80 [0.189]
7.50 [0.295] <del> </del>	5° —	- 0.80 [0.031]
		A
		В
	9.10 [0.358]	G
		c
	1 1	
Ø0.45 [Ø0.018]		D
5.08 [0.200]		OP DP
ar.		
	$\mathcal{A}$	1.6

ELECTRO-OPTICAL	CHARACTERIS	STICS TA=2	5 <b>'</b> C	$I_f = 10 \text{mA}$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		2.2	2.6	۷f	
REVERSE VOLTAGE	5.0			٧r	1r=100µA
AXIAL INTENSITY		2500		µcd	$I_f = 10mA$
EMITTED COLOR:	GREEN				
FACE COLOR:	BLACK				
SEGMENT COLOR:	GREEN	DIFFUSED			

## LIMITS OF SAFE OPERATION AT 25°C PER DIE

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.6	mW/ <b>'</b> C
OPERATING, STORAGE TEMP.	$-40\ T0\ +85$	<b>°</b> C
SOLDERING TEMP.	+ 260	°C
2.0mm FROM BODY		3 SEC. MAX

\* t<10uS

COMMON ANODE

Ε C D  $\Diamond$ 

PART NUMBER

REV.

LDS-A322RF

0.36" SEVEN SEGMENT, LED DISPLAY, COMMON ANODE, 565nm GREEN CHIPS, BLACK FACE WITH GREEN SEGMENTS. CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE: 10.16.00 PAGE: 1 OF 1

SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

<u>Lumex</u>:

LDS-A322RF