

SSL-LX2577GIW



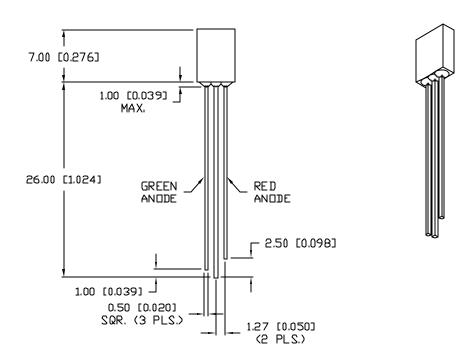

ELECTRO-OPTICAL CHAP	RACTERISTICS	TA=25°C	If= 20	mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)		nm	
	ļ	565 (GREEN))	nm	
FORWARD VOLTAGE (R/G	3)	2.0/2.2	2.5/2.6	۷f	
REVERSE VOLTAGE	5.0			٧r	Aپر100 =۱۲
AXIAL INTENSITY		10		mcd	If = 20mA
VIEWING ANGLE		OP		2x theta	
EMITTED COLOR:	RED/GREEN				
EPOXY LENS FINISH:	MILKY WHITE	DIFFUSED			

LIMITS OF SAFE OPERATION	I AT 25°C		
PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(R/G)	30/25	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.2	mW/°C
OPERATING, STORAGE TEMP	_	-40 TO +85	ŤĊ
SOLDERING TEMP.		+ 260	^ C
2.0mm FROM BODY			3 SEC. MAX

* t<10µS

UNCONTROLLED DOCUMENT

REV.

PART NUMBER SSL-LX2577IGW

2mm x 5mm RECTANGULAR BICOLOR LED. 635nm RED/565nm GREEN, MILKY WHITE DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

 $\begin{array}{c} \underline{\text{Reliablity Note}} \\ \text{Our nany years of experience data accumulation indicate that} \end{array}$ SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359,2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 8.30.05 PAGE: 1 OF 1 SCALE: N/A JΟ

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX2577GIW