

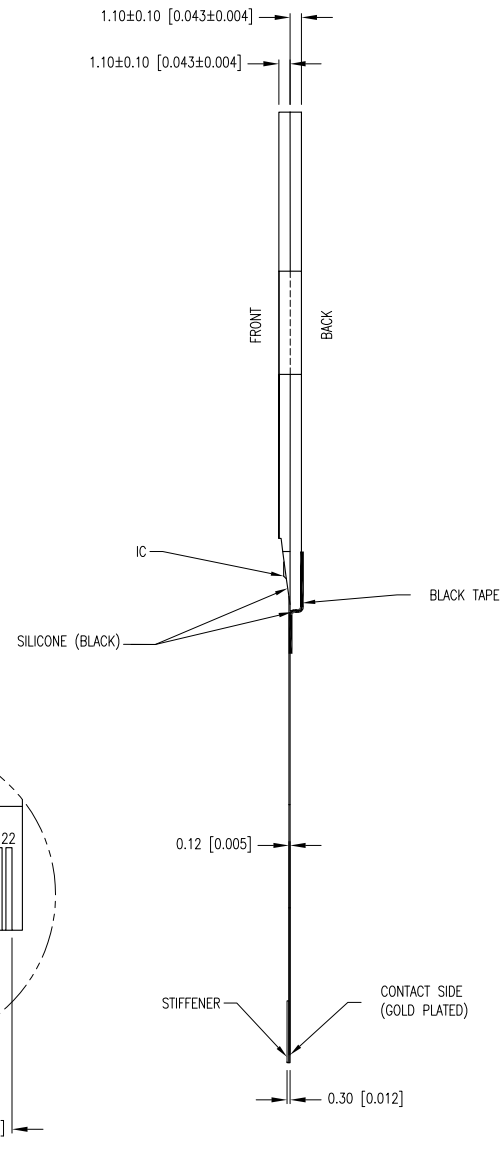


PART NUMBER	LCM-H12864GBYK	REV.	A
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
6.1.15	E.C.N. #11953.		A

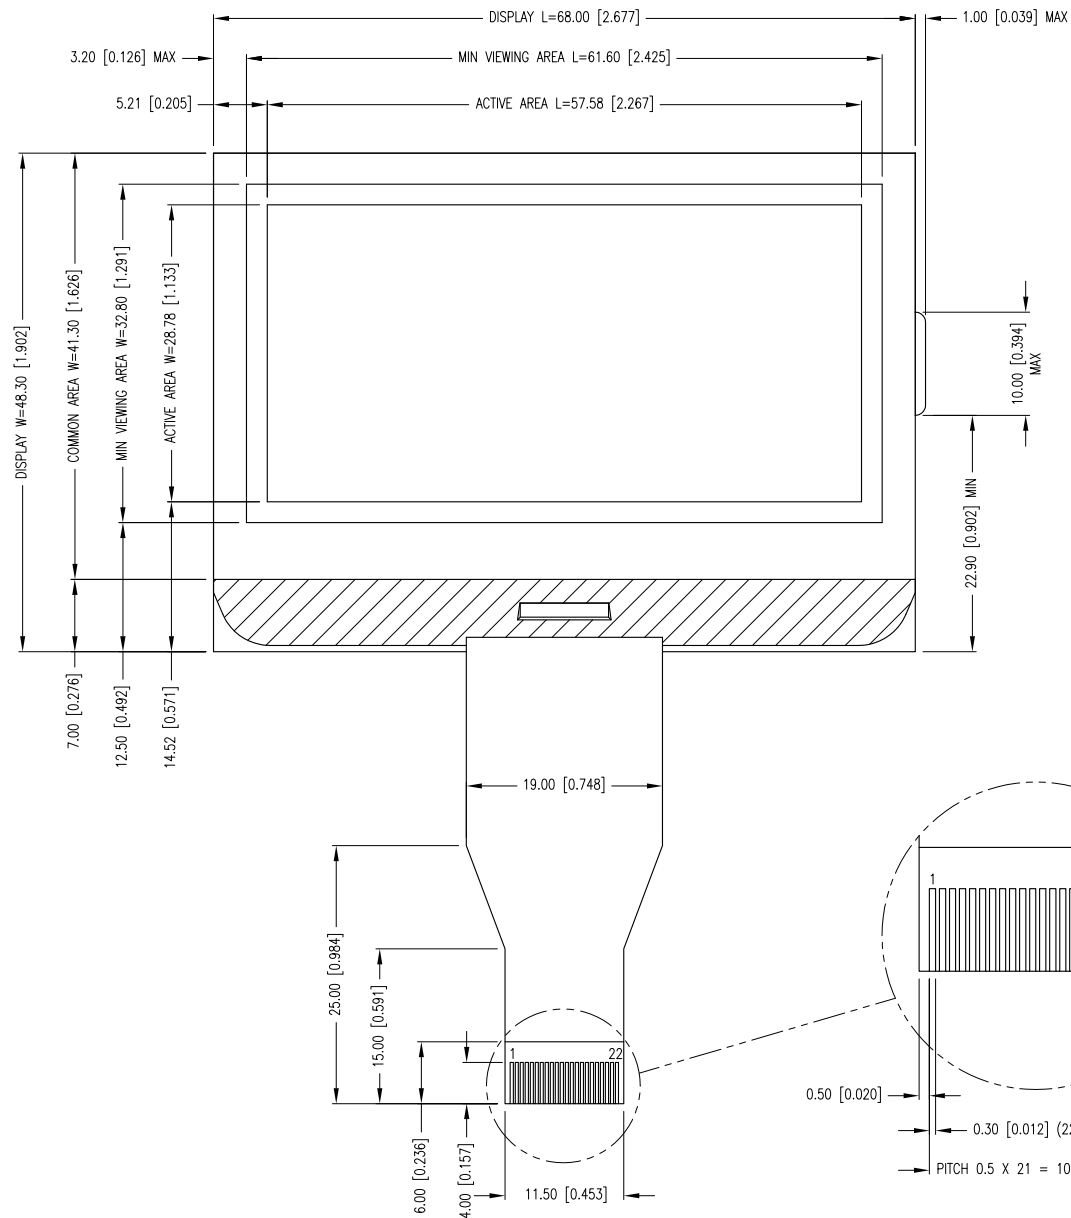

PIXEL DETAIL

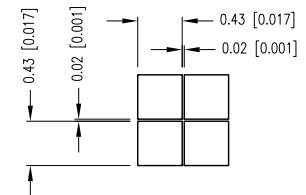

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

UNCONTROLLED DOCUMENT



425 N. GARY AVE.  
CAROL STREAM, IL 60188-4900  
PHONE: +1.800.278.5666  
FAX: +1.630.315.2152  
WEB: WWW.ITWECOS.COM

128x64 GRAPHIC BISTABLE, YELLOW PIXELS ON BLACK BACKGROUND, 3.3V, VLCD = 25V, 1/64 DUTY, 1/9 BIAS

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION  
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	09.30.10	DRAWN BY:	AB
PAGE:	1 OF 3	CHKD BY:	KF
SCALE:	N/A	APRVD BY:	BC
UNIT:	mm [INCH]		Ⓟ

PART NUMBER	LCM-H12864GBYK	REV.	A
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
6.1.15	E.C.N. #11953.		A

PIN CONFIGURATION					
PIN NO.	SYMBOL	FUNCTION			
1	NC	NO CONNECT.			
2	PS0,PS1,PS2	THESE PINS ARE FOR SELECTING DIFFERENT BUS INTERFACE. BUS INTERFACE SELECTION:			
3		PS2	PS1	PS0	MPU INTERFACE
		L	H	H	8-BIT 6800 PARALLEL INTERFACE
4		NOTE (1) L IS CONNECTED TO VSS    (2) H IS CONNECTED TO VDDIO			
5	CLS	THIS PIN IS THE INTERNAL CLOCK ENABLE PIN. WHEN THIS PIN IS PULLED HIGH TO VDDIO, INTERNAL CLOCK IS ENABLED. THE INTERNAL CLOCK WILL BE DISABLED WHEN IT IS PULLED LOW TO VSS, AN EXTERNAL CLOCK SOURCE MUST BE INPUT TO CL PIN FOR NORMAL OPERATION.			
6	D/C#	THIS PIN IS DATA/COMMAND CONTROL PIN. A HIGH AT D/C INDICATES DATA INPUT WHILE A LOW AT D/C INDICATES COMMAND INPUT. IN t <sub>bC</sub> MODE, THIS PIN ACTS AS SA0 FOR SLAVE ADDRESS SELECTION.			
7	E(R/D#)	THIS PIN IS MCU INTERFACE INPUT. WHEN 6800 INTERFACE MODE IS SELECTED, THIS PIN WILL BE USED AS THE ENABLE (E) SIGNAL. READ/WRITE OPERATION IS INITIATED WHEN THIS PIN IS PULLED HIGH AND THE CHIP IS SELECTED.			
8	R/W#(WR#)	THIS PIN IS MCU INTERFACE INPUT. WHEN 6800 INTERFACE MODE IS SELECTED, THIS PIN WILL BE USED AS READ/WRITE (R/W#) SELECTION INPUT. READ MODE WILL BE CARRIED OUT WHEN THIS PIN IS PULLED HIGH AND WRITE MODE WHEN LOW.			
9	CS1#	THESE PINS ARE THE CHIP SELECT INPUTS FOR COMMUNICATION BETWEEN MCU. TO SELECT THE CHIP CS1# MUST BE LOW AND CS2 MUST SET HIGH.			
10	RES#	THIS PIN IS THE RESET SIGNAL INPUT. INITIALIZATION OF THE CHIP IS STARTED ONCE THIS PIN IS PULLED LOW. MINIMUM PULSE WIDTH FOR RESET SEQUENCE IS 20µs.			
11	CL	THIS PIN IS THE DISPLAY CLOCK INPUT/OUTPUT.			
12	D0	THESE PINS ARE THE 8-BIT BI-DIRECTIONAL DATA BUS. IN SERIAL INTERFACE MODE, D1 IS THE SERIAL DATA INPUT (SDIN), D0 IS THE SERIAL CLOCK INPUT, (SCLK).			
13	D1				
14	D2				
15	D3				
16	D4				
17	D5				
18	D6				
19	D7				
20	BUSY	A HIGH LEVEL INDICATES BUSY STATUS (OUTPUT DRIVING WAVEFORM) OF THE DRIVER.			
21	VDD	THIS PIN IS THE SYSTEM POWER SUPPLY PIN OF THE LOGIC BLOCK.			
22	VSS	THIS IS A GROUND PIN.			

ABSOLUTE MAXIMUM RATINGS			
SYMBOL	PARAMETER	FUNCTION	SYMBOL
V <sub>DD</sub>	SUPPLY VOLTAGE	-0.3 TO +3.6	V
V <sub>DDIO</sub>		-0.3 TO MIN (V <sub>DD</sub> +0.5,+3.6)	V
V <sub>0</sub>		-0.3 TO +38	V
V <sub>CI</sub>		-0.3 TO +3.6	V
V <sub>IN</sub>	INPUT VOLTAGE	V <sub>SS</sub> -0.3 TO V <sub>DDIO</sub> +0.3	V
T <sub>A</sub>	OPERATING TEMPERATURE RANGE	-20° TO +70°	°C
T <sub>STG</sub>	STORAGE TEMPERATURE RANGE	-30° TO +80°	°C

MAXIMUM RATINGS ARE THOSE VALUES BEYOND WHICH DAMAGES TO THE DEVICE MAY OCCUR.  
FUNCTIONAL OPERATION SHOULD BE RESTRICTED TO THE LIMITS IN THE ELECTRICAL  
CHARACTERISTICS TABLES OR PIN DESCRIPTION SECTION.

THIS DEVICE CONTAINS CIRCUITRY TO PROTECT THE INPUTS AGAINST DAMAGE DUE TO HIGH  
STATIC VOLTAGES OR ELECTRIC FIELDS; HOWEVER, IT IS ADVISED THAT NORMAL PRECAUTIONS  
BE TAKEN TO AVOID APPLICATION OF ANY VOLTAGE HIGHER THAN MAXIMUM RATED VOLTAGES  
TO THIS HIGH IMPEDANCE CIRCUIT. THIS DEVICE MAY BE LIGHT SENSITIVE. CAUTION SHOULD  
BE TAKEN TO AVOID EXPOSURE OF THIS DEVICE TO ANY LIGHT SOURCE DURING NORMAL  
OPERATION. THIS DEVICE IS NOT RADIATION PROTECTED.


DC CHARACTERISTICS						
ITEM	SYMBOL	MIN.	TYP.	MAX.	CONDITION	UNIT
OPERATING VOLTAGE (1)	V <sub>DD</sub>	2.4	3.3	3.5	--	V
OPERATING VOLTAGE (2)	V <sub>LCD</sub>	10.0	25.0	35.0	--	V
DYNAMIC CURRENT CONSUMPTION	I <sub>DD</sub>	--	TBD	--	--	$\mu$ A

AC CHARACTERISTICS							
SYMBOL	PARAMETER			MIN.	TYP.	MAX.	UNIT
t <sub>cycle</sub>	CLOCK CYCLE TIME			100	—	—	NS
t <sub>AS</sub>	ADDRESS SETUP TIME			0	—	—	NS
t <sub>AH</sub>	ADDRESS HOLD TIME			20	—	—	NS
t <sub>DSW</sub>	WRITE DATA SETUP TIME			30	—	—	NS
t <sub>DHW</sub>	WRITE DATA HOLD TIME			20	—	—	NS
t <sub>DHR</sub>	READ DATA HOLD TIME			10	—	50	NS
t <sub>OH</sub>	OUTPUT DISABLE TIME			—	—	40	NS
t <sub>ACC</sub>	ACCESS TIME (RAM)			15	—	—	NS
	ACCESS TIME (COMMAND)			15	—	—	NS
PW <sub>CSL</sub>	CHIP SELECT LOW PULSE WIDTH (READ RAM)			250	—	—	NS
	CHIP SELECT LOW PULSE WIDTH (READ COMMAND)			250	—	—	NS
	CHIP SELECT LOW PULSE WIDTH (WRITE)			50	—	—	NS
PW <sub>CSH</sub>	CHIP SELECT HIGH PULSE WIDTH (READ)			100	—	—	NS
	CHIP SELECT HIGH PULSE WIDTH (WRITE)			50	—	—	NS
t <sub>r</sub>	RISE TIME			—	—	10	NS
t <sub>f</sub>	FALL TIME			—	—	10	NS



RELIABILITY TEST	
TESTS ITEM	CONDITION
HIGH TEMP. STORAGE	+80°C x 96hrs
LOW TEMP. STORAGE	-30°C x 96hrs
HIGH TEMP. OPERATION	+70°C x 96hrs
LOW TEMP. OPERATION	-20°C x 96hrs
HIGH TEMP., HIGH HUMIDITY	+60°C x 90%RH x 96hrs
THERMAL SHOCK	-20°C x 30min $\rightarrow$ -25°C x 10s $\rightarrow$ +70°C x 30min x 5 CYCLES
VIBRATION TEST	FREQUENCY x SWING x TIME 40Hz x 4mm x 4hrs
DROP TEST	HEIGHT x No. OF DROP 1.0m x 6 DROPS

OPERATING LIFE TIME: 50,000 HOURS  
(AT ROOM TEMPERATURE WITHOUT DIRECT IRRADIATION OF SUNLIGHT).

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

 <b>LUMEX</b> Creating LED and LCD Solutions Together™	425 N. GARY AVE. CAROL STREAM, IL 60188-4900 PHONE: +1.800.278.5666 FAX: +1.630.315.2152 WEB: WWW.ITWECOS.COM	128x64 GRAPHIC BISTABLE, YELLOW PIXELS ON BLACK BACKGROUND, 3.3V, VLCD = 25V, 1/64 DUTY, 1/9 BIAS  **THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.**  CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.	DATE: 09.30.10	DRAWN BY: AB
			PAGE: 2 OF 3	CHKD BY: KF
			SCALE: N/A	APRVD BY: BC
			UNIT: mm [INCH]	(Pb)

PART NUMBER	LCM-H12864GBYK	REV.	A
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
6.1.15	E.C.N. #11953.		A

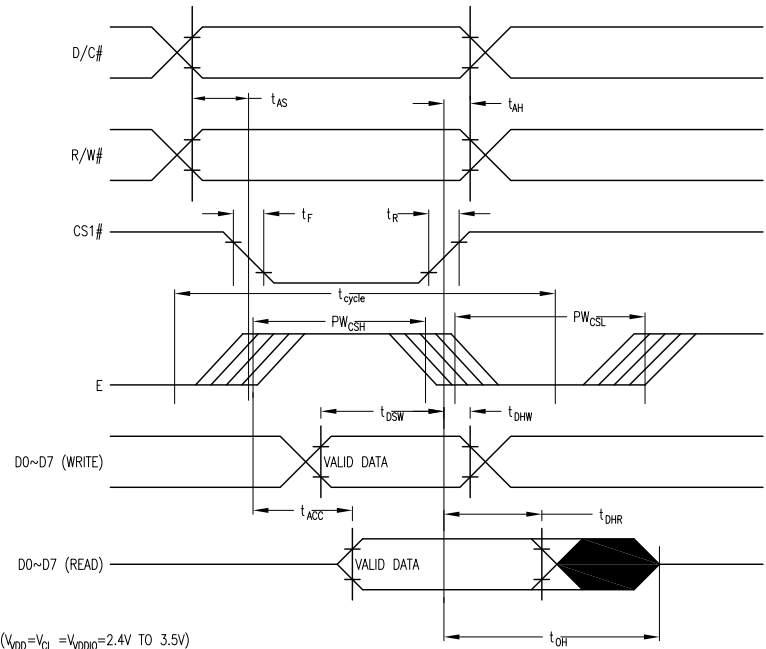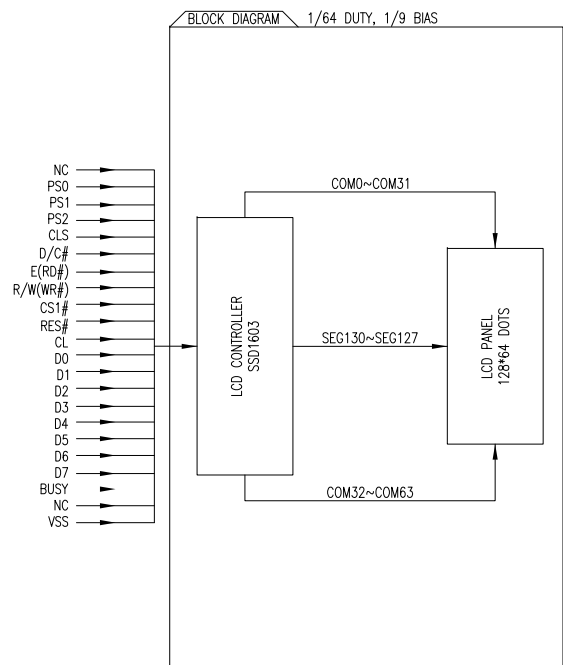

( $V_{DD0}=V_{CL}=V_{DDIO}=2.4V$  TO  $3.5V$ )  
THE  $PW_{CSH}$  TIMING REFERENCE IS 50% OF THE RISING/FALLING EDGE OF E OR CS1# PIN.  
THE  $t_{DSW}$  AND  $t_{DHW}$  TIMING IS REFERENCE TO THE 50% OF RISING/FALLING EDGE OF E OR CS1# PIN.

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION -0.00 MAX.= +0.00 -DECIMAL PRECISION

	425 N. GARY AVE. CAROL STREAM, IL 60188-4900 PHONE: +1.800.278.5666 FAX: +1.630.315.2152 WEB: WWW.ITWECS.COM	128x64 GRAPHIC BISTABLE, YELLOW PIXELS ON BLACK BACKGROUND, 3.3V, VLCD = 25V, 1/64 DUTY, 1/9 BIAS	DATE: 09.30.10	DRAWN BY: AB
		<div>**THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.**</div> <div>CONFIDENTIAL INFORMATION</div> <div>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.</div>	PAGE: 3 OF 3	CHKD BY: KF
			SCALE: N/A	APRVD BY: BC
			UNIT: mm [INCH]	

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[LCM-H12864GBYK](#)