



PART NUMBER LCD-S301C31TF-3 REV. В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #11244.	5.17.05
В	E.C.N. #11148.	02.08.07

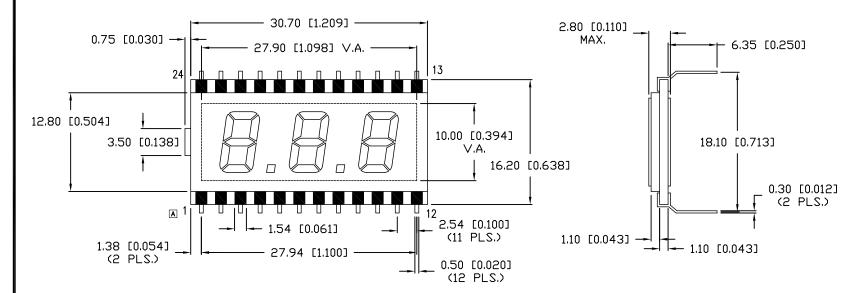

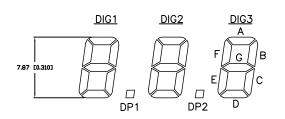

PIN NO.	1	2	3	4	5	6	7	8
SEGMENT	СОМ	E1	D1	C1	DP1	E2	D2	C2
PIN NO.	9	10	11	12	13	14	15	16
SEGMENT	DP2	E3	D3	C3	В3	A3	F3	G3
PIN NO.	17	18	19	20	21	22	23	24
SEGMENT	B2	A2	F2	G2	B1	A1	F1	G1

CHARACTERISTICS					
FLUID TYPE:	TN				
BACKGROUND COLOR:	GRAY				
VIEWING DIRECTION:	6:00				
DISPLAY MODE:	TRANSFLECTIVE				
OPERATING VOLTAGE:	3.0 VAC				
OPERATING TEMP.	0°C TO 50°C				
STORAGE TEMP.	-20°C TO 70°C				
DRIVING METHODE:	STATIC				
CONNECTION TYPE:	24 PINS				

UNCONTROLLED DOC

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.000), X.XX=±0.05 (±0.000), X.X

REV. PART NUMBER B LCD-S301C31TF-3

0.31" CHARACTER HEIGHT, THREE DIGIT LCD GLASS, TN, TRANSFLECTIVE, 24 PINS.

CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

ITW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE:

6.30.03 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

LCD-S301C31TF-3