UNCONTROLLED DOCUMENT


SC:0.25

PART NUMBER

REV.

SSF-LXHM340GGGD

PRELIMINARY IN P/N DIR

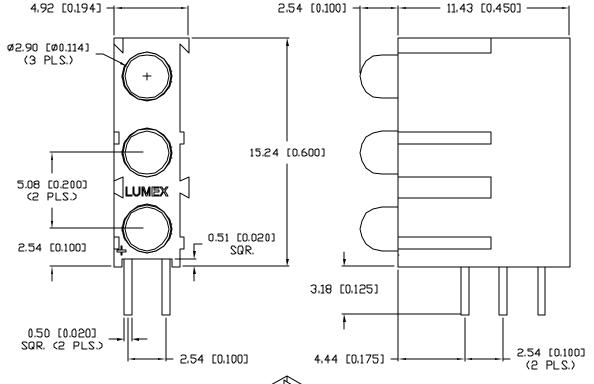

ELECTRO-OPTICAL CH	ARACTERI	STICS TA=25°C		If= 20mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		5 6 5		nm	
FORWARD VOLTAGE		2.2	2.6	٧f	
REVERSE VOLTAGE	5.0			٧ _٢	I _Γ = 1 🛮 Ο μΑ
AXIAL INTENSITY		40		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		6D		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH:	GREEN	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.Б	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	.C
SOLDERING TEMP.	+ 260	.C
2.0mm FROM BODY		3 SEC. MAX

* t<10µS

NOTES:

- 1. SSH-LXHM34D, BLACK HOLDER.
- 2. SSL-LX3044GD, GREEN LED.

U// U// T() LEAD SIZE=±0.05 (±0.030), MRE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MRE = +0.75 (±0.030). MRE

REV.

PART NUMBER
SSF-LXHM340GGGD

T—3mm TRIPLE TOWER MATING FAULT INDICATOR, 565nm GREEN LEDS, GREEN DIFFUSED.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUNIEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLISSINE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

Our many years of experience data accumulation indicate that solder heat is a major cause of early and future failure. Please pay attention to your soldering process.



290 E. HELEN ROAD PALATINE, IL 60067—6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE

PAGE: 2.03.03 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSF-LXHM340GGGD