


## UNCONTROLLED DOCUMENT



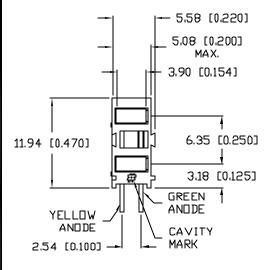

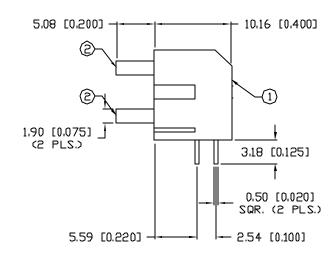

PART NUMBER				
	SSF-LXHM2247YGYGW		А	
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE		
Α	E.C.N. #11148.	1.2	5.05	

Α


## ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		585 (YELLOW	V)	nm	
		565 (GREEN)			
FORWARD VOLTAGE (Y/	Ġ)	2.1/2.2	2.5/2.6	۷f	
REVERSE VOLTAGE	5.0			٧r	Aµ00 = 1
AXIAL INTENSITY		8		mcd	lf=20mA
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	YELLOW/GR	REEN			
EPOXY LENS FINISH:	MILKY WHI	te diffused			

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(Y/G)	30/25	mA
POWER DISSIPATION		105	mW
DERATE FROM 25 <sup>+</sup> C		-1.2	mW/*C *C
OPERATING, STORAGE TEMP.		- 40 TO + 85	۰Ċ
SOLDERING TEMP.		+ 260	<b>'</b> C
2.0mm FROM BODY			3 SEC. MAX

\* t<10µS

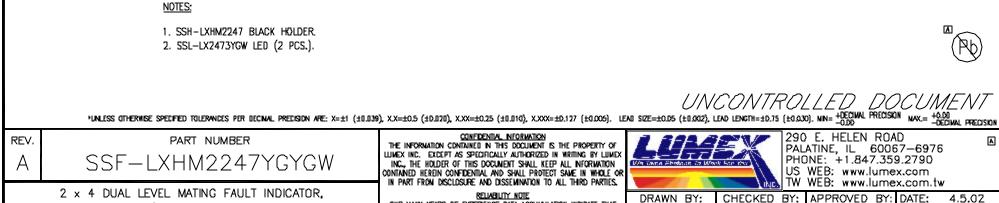

585nm YELLOW/565nm GREEN BICOLOR LED. MILKY WHITE DIFFUSED LENS.

RELIABILITY NULE					
OUR NANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT					
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.					
please pay attention to your soldering process.					

Abelan in Wes	a sur nor	US WE	: +1.84 B; www.l B: www.l	ume	x.com	,
WN BY:	CHECKED E	IY: AP	PROVED		DATE: PAGE; SCALE:	1 OF 1
JU		1			JOUALL.	IN/ A

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSF-LXHM2247YGYGW