
## UNCONTROLLED DOCUMENT

Ø5.90 [Ø0.232] — Ø5.00 [Ø0.197]

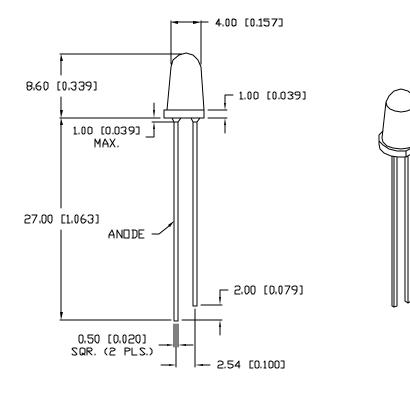

## PART NUMBER SSL-LX50493LGD

C KEV

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	CHG'D FLANGE DIAMETER.	8.17.92
В	E.C.N. #10BRDR, & REDRAWN IN 3D.	5.25.01
С	E.C.N. #11148	11.09.06

ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^{\circ}C$ $I_f=20$ mA							
PARAMETER	MIN	TYP	MAX	ZTINU	TEST COND		
PEAK WAVELENGTH		565		nm			
FORWARD VOLTAGE		2.2	2.6	$v_f$			
reverse voltage	5.0			$V_r$	I <sub>r</sub> = 1 00µА		
AXIAL INTENSITY		15		mcd	I <sub>f</sub> =20mA		
	1.0			mcd	$I_f = 2mA$		
VIEWING ANGLE		60		2x theta			
EMITTED COLOR:	GREEN						
EPOXY LENS FINISH:	GREEN	DIFFUSED					

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mΑ
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO +85	•c
SOLDERING TEMP.	+ 260	.c
2.0mm FROM BODY		3 SEC. MAX

<sup>\*</sup> t<10µS



\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAU SIZE=±0.05 (±0.002), LEAU SIZE=±0.05 (±0.000), LEAU SI

rev. part number
C SSL-LX50493LGD

T-5mm (T-1 3/4) 565nm GREEN LED,
GREEN DIFFUSED TAPERED LENS, LOW CURRENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HXIDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLISSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
U\$ WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.09.06
PAGE: 1 OF 1
JC SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX50493LGD