
UNCONTROLLED DOCUMENT

SC:0.25	PART NUMBER	REV.
	SSF-LXH106LYD	
	/	

PRELIMINARY IN P/N DIR

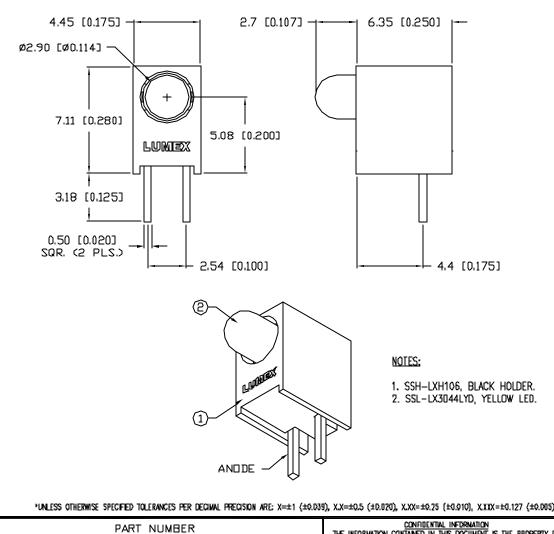

electro-optical characteristics t _A =25°C I _f =20mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		585		nm	
FORWARD VOLTAGE		2.1	2.5	٧f	
REVERSE VOLTAGE	5.0			۷r	l _r =100μΑ
axial intensity		30		mcd	lf=20mA
	1.0			mcd	lf=2mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH;	YELLOW	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS	
PEAK FORWARD CURRENT*	150	mA	
STEADY CURRENT	30	mA	
POWER DISSIPATION	105	mW	
DERATE FROM 25°C	— 1.Б	m₩/°C	
OPERATING, STORAGE TEMP.	- 40 TO + 85	°C	
SOLDERING TEMP.	+ 260	. C	
2.0mm FROM BODY		3 SEC. MAX	
s t<10ھرS			

	UNCONTROLLED DOCUMENT	
J5).	LEAD SIZE= ± 0.05 (± 0.002), LEAD LENGTH= ± 0.75 (± 0.030), MN= ± 0.00 MAX.= ± 0.00 MAX.= ± 0.00	

				~~~~	DESIMIC TRESIVISI	
REV.		<u>confidential information</u> The Information Contaned in this document is the property of Lumex NG. Except as specifically authorized in writing by Lunex	LUM	PAL		57-6976
	SSF-LXH106LYD	INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION Contained Herein confidential and shall protect same in whole or In part from disclosure and dissemination to all throp parties.	Me Dane Abraus IS Ma		DNE: +1.847.35 WEB: www.lume WEB: www.lume	ex.com
T-3mm RIGHT ANGLE FAULT INDICATOR,		Relability name years of experience data accumulation indicate that	DRAWN BY:	CHECKED BY:	APPROVED BY:	
585n	m YELLOW, LOW CURRENT LED, YELLOW DIFFUSED LENS.	SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. Please pay attention to your soldering process.	BC			PAGE: 1 OF 1 SCALE: N/A

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSF-LXH106LYD