
### UNCONTROLLED DOCUMENT

# PART NUMBER SSF-LXH1501IGW

REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

REV.

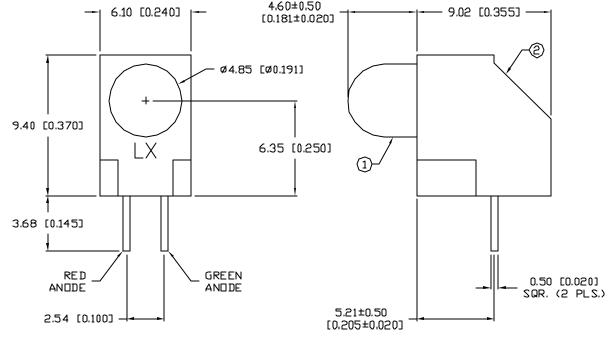

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=		I <sub>f</sub> = 20	ImA			
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		635 (RED)		nm		
	565 (GREEN)			nm		
FORWARD VOLTAGE (R/G)		2.0/2.2	2.5/2.6	۷f		
reverse voltage	5.0			$V_r$	Ir=100µA	
AXIAL INTENSITY (R/G)		40/30		mcd	If=20mA	
VIEWING ANGLE		60		2x theta		
EMITTED COLOR: RED,	/GREEN					
EPOXY LENS FINISH: MILKY WHITE DIFFUSED						

#### LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	CØLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(R/G)	30/25	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.2	mW/°C
OPERATING, STORAGE TEMP.		-40 TO +85	ŤĆ
SOLDERING TEMP.		+ 260	•€
2.0mm FROM BODY			3 SEC. MAX

<sup>\*</sup> t<10µS

#### NOTES:

- 1. SSL-LX509F3IGW, RED/GREEN BICOLOR LED.
- 2. SSH-LXH1501 HOLDER, MATERIAL BLACK NYLON, UL 94-VO.

## UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

PART NUMBER

SSF-LXH1501IGW

T-5mm (T-1 3/4) BICOLOR LED.

-5mm (T–1 3/4) BICOLOR LED. 635nm RED/565nm GREEN, MILKY WHITE DIFFUSED LENS. Confidential information

The information contained in this document is the property of lumex inc. Except as specifically authorized in writing by Lumex inc., the holder of this document shall keep all information contained herein confidential and shall protect same in whole or in part from disclusure and dissemination to all third parties.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

INCORPORATED 1

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11-24-99
PAGE: 1 OF 1
BU SCALE: N/A

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSF-LXH1501IGW