
UNCONTROLLED DOCUMENT

	PART NUMBER	
SSL-	-LX507F3SYC	,

REV. В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR, & REDRAWN IN 3D.	6.4.01
В	E,C,N, #11148	11.02.06

ø4.75	[Ø0.187] -	\ _
		+
		\ ' /

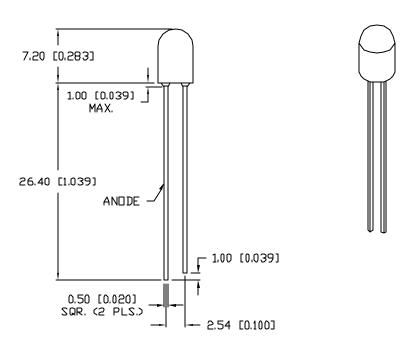

ELECTRO-OPTICAL CH	ARACTERIS	STICS TA=25°	C	I _f =20mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		590		nm	_
FORWARD VOLTAGE		2.1	2.5	V_{f}	
reverse voltage	5.0			٧r	Ir=100µA
AXIAL INTENSITY		500		med	$I_f = 20 \text{mA}$
VIEWING ANGLE		30		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	YELLOW	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	1 <i>2</i> 5	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
SOLDERING TEMP.	+ 260	° C
2.0mm FROM BODY		3 SEC. MAX
* 1 440 C		

* t<10µS



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.0010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD S

REV. PART NUMBER SSL-LX507F3SYC

T-5mm (T-1 3/4) 590nm SUPER YELLOW LED, WATER CLEAR LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



JC

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE: 11.02.06 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX507F3SYC