
UNCONTROLLED DOCUMENT

ø5.00	[ø0.197]	\ _	
)
)

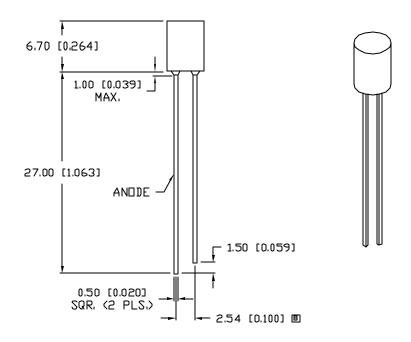

PART NUMBER SSL-LX50FT3SRD

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	REDRAWN, UPDATED SPECS.	2.10.95
В	E.C.N. #10731. & REDRAWN IN 3D.	4.30.01
С	E.C.N. #11148	11.01.06

ELECTRO-OPTICAL CH	ARACTERIS	TICS TA=25	5°C	I _f =20mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660		nm	
FORWARD VOLTAGE		1.7	2,2	V_{f}	
reverse voltage	4.0			٧r	1r=100µA
AXIAL INTENSITY		35		mcd	$I_f = 20mA$
VIEWING ANGLE		110		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED DIFF	FUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.2	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
SOLDERING TEMP.	+ 260	° C
2.0mm FROM BODY		3 SEC. MAX
* 1 440 C		

^{*} t<10µS



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN=+DECINAL PRECISION MAX.=+0.00 (±0.002), MIN=+DECINAL PRECISION MAX.=+0.000 (±0.

rev. part number
C SSL-LX50FT3SRD

T-5mm (T-1 3/4) 660nm SUPER RED, FLAT TOP LED, RED DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORAZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLISSINGE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067—6976 PHONE: +1.847.359.2790 US WEB: www.lumey.com

U\$ WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.01.06
PAGE: 1 OF 1
JC
SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX50FT3SRD