
UNCONTROLLED DOCUMENT

PART NUMBER SSL-LX3034SUGD REV.

REV.	E.C.N.	NUMBER	AND	REVISION	COMMENTS	D/	ATE
Ā	E.C.N.	#11439.				9.0	4.07

— ø3.00 [ø0.118] Ø4.00 [Ø0.157] —

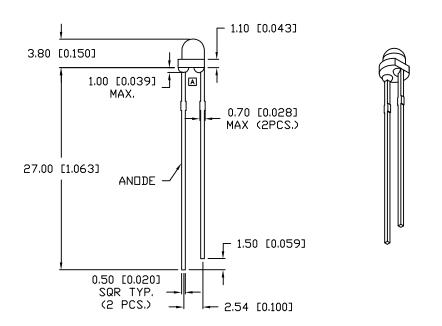

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA						
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND	
PEAK WAVELENGTH		574		nm		
FORWARD VOLTAGE		2.2	2.6	v_f		
REVERSE VOLTAGE	5.0			V_r	Ir=100µA	
AXIAL INTENSITY		60		mcd	$I_f = 20 \text{mA}$	
VIEWING ANGLE		60		2x theta		
EMITTED COLOR:	GREEN					
EPOXY LENS FINISH:	GREEN	DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C

DADAMETED	MAY	LIMITO
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.6	mW/*C
OPERATING, STORAGE TEMP.	- 40 TO +85	. C
SOLDERING TEMP.	+ 260	. C
2.0mm FROM BODY		3 SEC. MAX
* 1×10C		

* t<10µS

UNCONTROLLED DOCL

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.005). LEAD SIZE=±0.05 (±0.005). LEAD SIZE=±0.05 (±0.005). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.005). LEAD SIZE=±0.05 (±0.005). LEAD SIZE=±0.05 (±0.005). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.005). LEAD SIZE=±0.05 (±0.005). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.005). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). MIN=+DECIMAL PRECISI

REV.

PART NUMBER SSL-LX3034SUGD

T-3mm (T-1) 574nm SUPER ULTRA GREEN LED, GREEN DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC.. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



GB

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw CHECKED BY: APPROVED BY: DATE: DRAWN BY: 7.15.02

PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX3034SUGD