
UNCONTROLLED DOCUMENT

ø5.90 [ø0.232]	ø5.00 [ø0.197]
	(+)
5.45 [0.215] REF.	

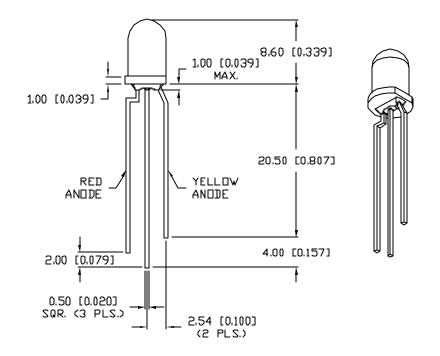

PART NUMBER SSL-LX5099IYC

REV.

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #11148	11.06.06

ELECTRO-OPTICAL CHARACT	ERISTIC	S TA=25°C	lf=20	ImA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)		nm	
		585 (YELLOW	/)	nm	
FORWARD VOLTAGE (R/Y)		2.0/2.1	2.5/2.5	v_f	
REVERSE VOLTAGE	5.0			٧r	I _r =100µA
axial intensity (R/Y)		200/150		mcd	lf=20mA
VIEWING ANGLE		30		2x theta	
EMITTED COLOR; RED	/YELLOI	N			
EPOXY LENS FINISH: WAT	ER CLE/	∖ R			

LIMITS OF SAFE OPERATION AT 25'C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	3 D	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	•c
SOLDERING TEMP.	+ 260	. c
2.0mm FROM BODY		3 SEG. MAX

* t<10µS



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.020), XXX=±0.127 (±0.035). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +0.05 (±0.030). MIN=

PART NUMBER

A SSL-LX50991YC

T-5mm (T-1 3/4) 635m RED/585nm YELLOW BICOLOR LED,

WATER CLEAR LENS, COMMON CATHODE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HEALDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISOLOGISHER AND DISSEMINATION TO ALL THIRD PARTIES.

CELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WFB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.06.06
PAGE: 1 OF 1
JC
SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5099IYC