


Discrete LEDs ~ Dome Lens



SSL-LX4064 Series

T-4mm, 6mm High Dome

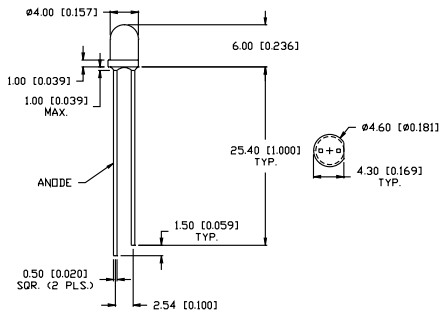

FEATURES / OPTIONS

- ▶ State-of-the-Art, High Brightness Chip Technology
- ▶ Choice of Colors and Lens Finishes
- ▶ Lead Frame / Lens Casting Reliability
- ▶ Easy-to-Solder Leads, Tin Finish
- ▶ Available Bulk or on Tape and Reel
- ▶ Lead Trimming and Forming Available
- ▶ Custom Shapes, Easily Tooled, Low Minimum
- ▶ Blinking LED
- ▶ With Internal Resistor for 5V and 12V Operation


APPLICATIONS / USES

- ▶ Board or Panel Indication or Illumination
- ▶ Backlighting of Overlays and Graphics
- ▶ Annunciator and Control Panels
- ▶ Keyboards and Switches
- ▶ Telecom Switches and Central Station Equipment
- ▶ Signs, Warning Lights, Displays

Lumex Part Number	Die Material	Emitted Color	Peak (nm)	Lens	Operating Current (mA)	Operating TYP. Vf (V)	Brightness TYP. Mcd	@ mA	View Angle° 2θ
HIGH BRIGHTNESS									
SSL-LX4064SID	AlInGaP	Super High Intensity Red	636	Red Diffused	5-25	2	200	20	60
SSL-LX4064SOD	AlInGaP	Super Orange	610	Orange Diffused	5-25	2	200	20	60
SSL-LX4064SUGD	AlInGaP	Super Ultra Green	574	Green Diffused	5-25	2.2	150	20	60
SSL-LX4064SYD	AlInGaP	Super Yellow	590	Yellow Diffused	5-25	2	200	20	60
SSL-LX4064USBD	InGaN/SiC	Ultra Super Blue	470	Blue Diffused	5-25	3.5	150	20	60
STANDARD BRIGHTNESS									
SSL-LX4064GD	GaP	Green	565	Green Diffused	5-25	2.2	30	20	60
SSL-LX4064HD	GaP	High Efficiency Red	700	Red Diffused	5-25	2	4	20	60
SSL-LX4064ID	GaAsP	High Intensity Red	635	Red Diffused	5-25	2	40	20	60
SSL-LX4064SRD	GaAlAs	Super Red	660	Red Diffused	5-25	1.7	80	20	60
SSL-LX4064YD	GaAsP	Yellow	585	Yellow Diffused	5-25	2.1	30	20	60

SSL-LX4073 Series

T-4mm, 7mm High Dome

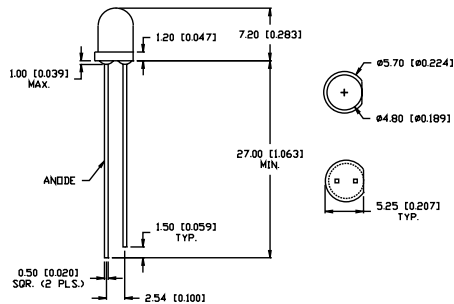

FEATURES / OPTIONS

- ▶ State-of-the-Art, High Brightness Chip Technology
- ▶ Choice of Colors and Lens Finishes
- ▶ Lead Frame / Lens Casting Reliability
- ▶ Easy-to-Solder Leads, Tin Finish
- ▶ Available Bulk or on Tape and Reel
- ▶ Lead Trimming and Forming Available
- ▶ Custom Shapes, Easily Tooled, Low Minimum
- ▶ Blinking LED
- ▶ With Internal Resistor for 5V and 12V Operation

APPLICATIONS / USES

- ▶ Board or Panel Indication or Illumination
- ▶ Backlighting of Overlays and Graphics
- ▶ Annunciator and Control Panels
- ▶ Keyboards and Switches
- ▶ Telecom Switches and Central Station Equipment
- ▶ Signs, Warning Lights, Displays

Lumex Part Number	Die Material	Emitted Color	Peak (nm)	Lens	Operating Current (mA)	Operating TYP. Vf (V)	Brightness TYP. Mcd	@ mA	View Angle° 2θ
HIGH BRIGHTNESS									
SSL-LX4073SID	AlInGaP	Super High Intensity Red	636	Red Diffused	5-25	2	400	20	60
SSL-LX4073SOD	AlInGaP	Super Orange	610	Orange Diffused	5-25	2	400	20	60
SSL-LX4073SUGD	AlInGaP	Super Ultra Green	574	Green Diffused	5-25	2.2	150	20	60
SSL-LX4073SYD	AlInGaP	Super Yellow	590	Yellow Diffused	5-25	2	300	20	60
SSL-LX4073USBD	InGaN/SiC	Ultra Super Blue	470	Blue Diffused	5-25	3.5	150	20	60
STANDARD BRIGHTNESS									
SSL-LX4073GD	GaP	Green	565	Green diffused	5-25	2.2	30	20	60
SSL-LX4073ID	GaAsP	High Intensity Red	635	Red Diffused	5-25	2.0	40	20	60
SSL-LX4073SRD	GaAlAs	Super Red	660	Red Diffused	5-25	1.8	80	20	60
SSL-LX4073YD	GaAsP	Yellow	585	Yellow Diffused	5-25	2.1	30	20	60



USA/Canada 1-800-278-5666
Asia +886-3-5821124



www.lumex.com



USA/Canada 1-847-359-8904
Asia +886-3-5821154

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

[SSL-LX4073USB](#)