


UNCONTROLLED DOCUMENT

PIN 9 -

PIN 1

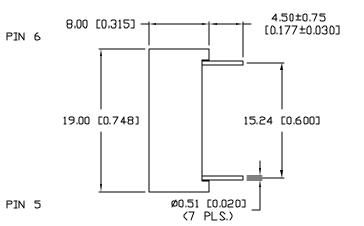






PART NUMBER REV. LDF-A5614RI REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=10mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)		nm	
${\it FORWARD\ VOLTAGE}$		2.0	2.5	٧f	
REVERSE VOLTAGE	5.0			٧٢	I _Γ =100μΑ
axial intensity		3500		µcd	$I_f = 10mA$
EMITTED COLOR:	RED				
FACE COLOR:	GRAY				
SEGMENT COLOR:	MILKY	WHITE DIFFUSE	D		

LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mΑ
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO +85	Υ.
SOLDERING TEMP.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX

\$µS ا



REPLACES PART #: LDF-A514RI

rev. part number LDF—A5614RI

0.56" SINGLE DIGIT OVERFLOW DISPLAY,
635nm RED CHIPS, GRAY FACE WITH WHITE SEGMENTS,
COMMON ANODE, RIGHT DECIMAL POINT.

CONFIDENTIAL NFORMATION
THE INFORMATION CONTRINED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX INC. EXCEPT AS SPECHICALLY AUTHORIZED IN WRITING BY LUMEX
INC. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION
CONTRINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR
IN PART FROM DISSLASSIBLE AND DISSEMINATION TO ALL THRO PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMILLATION INDICATE
THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE
FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX INCORPORATED

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 2-18-99
PAGE: 1 OF 1
BC SCALE: N/A

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: LDF-A5614RI