

SSL-LX5093SGSRW125



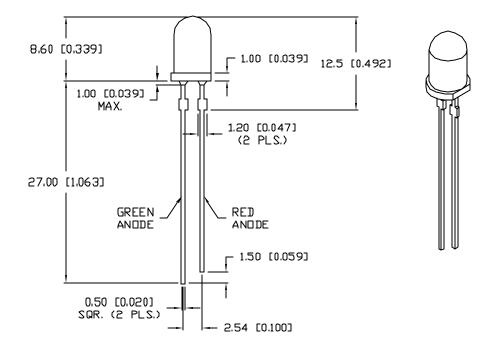

ELECTRO-OPTICAL CHARAC	TERISTICS	TA=25°C	If=20)mA	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	565 (GREEN)			nm	
		660 (RED)		nm	
FORWARD VOLTAGE (G/R)		2.2/1.7	2.6/2.2	۷f	
REVERSE VOLTAGE (G/R)	5.0/4.0			٧r	Ir=100)µA
AXIAL INTENSITY (G/R)		25/140		mcd	lf=20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR: GREEN/RED					
EPOXY LENS FINISH: MIL	KY WHITE	DIFFUSED			

LIMITS OF SAFE OPERATION	AT 25°C		
PARAMETER	CΩLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(G/R)	25/30	mΑ
POWER DISSIPATION	(G′/R)	105/100	mW
DERATE FROM 25°C		-1.2	mW/°C
OPERATING, STORAGE TEMP.		-40 TO +85	,Ç
SOLDERING TEMP.		+ 260	. C
2.0mm FROM BODY			3 SEC. MAX

^{*} t<10µS

UNCONTROLLED DOCUMENT

*UNILESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XXX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.00 (±0.000), XXX=±0.127 (±0.000), XXXX=±0.127 (±0.000), XXXX=±0.000, XXX=±0.000, XXX=±0.00

REV.

PART NUMBER SSL-LX5093SGSRW125

T-5mm (T-1 3/4) BICOLOR GREEN/RED LED. MILKY WHITE DIFFUSED LENS, WITH STANDOFFS. CONFIDENTIAL INFORMATION
THE INFORMATION CONTINUED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX
INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 6.11.01 PAGE: 1 OF 1 SCALE: N/A CT

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX5093SGSRW125