UNCONTROLLED DOCUMENT

17111 Hambert
SSL-LX3054HT/R


PART NUMBER

E.C.N. NUMBER AND REVISION COMMENTS DATE
E.C.N. #10BRDR, & REDRAWN IN 3D, 4.16.01

REV.

Ø4.00 [Ø0.157] — Ø3.00 [Ø0.118]

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C			$I_f = 20 \text{mA}$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		700		nm	
FORWARD VOLTAGE		2.0	2.5	V_{f}	
REVERSE VOLTAGE	5.0			٧r	1r=100µA
AXIAL INTENSITY		12		med	$I_f = 20 \text{mA}$
VIEWING ANGLE		30		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED 7	TRANPARENT			

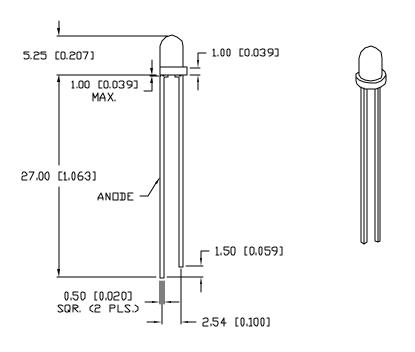

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.6	mW∕°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
SOLDERING TEMP.	+ 260	° C
2.0mm FROM BODY		3 SEC. MAX
* 1 440 C		

* t<10µS

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MN= +0.000 MAX.= +

A SSL-LX3054HT/R

T-3mm (T-1) 700nm RED LED,
RED TRANSPARENT LENS, REVERSE FLANGE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISOLOGIUME AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABLITY NOTE
OUR NAMY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067–6976 PHONE: +1.847.359.2790 US WFB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 6.11.96

BC APPROVED BY: DATE: 6.11.96

PAGE: 1 OF 1

SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX3054HT/R