
UNCONTROLLED DOCUMENT

PAF	RT NUMBER
SSL-L	X304F4GT

REV. В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	CHG'D FLAT TO CATHODE SIDE,	6,15,92
В	E.C.N. #10BRDR, & REDRAWN.	4.11.01

Ø3.80	[Ø0.150] —	
	(+)	
	ø2.90 [ø0.114]]

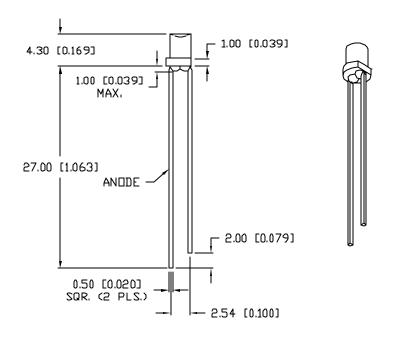

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C				$I_f = 20mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		5 6 5		nm	
FORWARD VOLTAGE		2.2	2.6	V_f	
REVERSE VOLTAGE	5.0			٧r	I _r =100μΑ
AXIAL INTENSITY		20		mcd	$I_f = 20 \text{mA}$
VIEWING ANGLE		130		2x theta	
EMITTED COLOR:	GREEN				
EPOXY LENS FINISH;	GREEN	TRANSPARENT			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	- 40 TO + 85	•ć
SOLDERING TEMP.	+ 260	.c
2.0mm FROM BODY		3 SEG. MAX

^{*} t<10µS

UNCONTROLLED DOCUMENT

*UNILESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.0010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.0030). MN= +DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.127 (±0.005).

REV. PART NUMBER SSL-LX304F4GT

> T-3mm DIMPLE LENS, 565nm GREEN LED, GREEN TRANSPARENT LENS,

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NG. EXCEPT AS SPECFICALLY AUTHORIZED IN WRITING BY LUMEX INC, THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 1.24.90 PAGE: 1 OF 1 SCALE: N/A BC

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX304F4GT