
## UNCONTROLLED DOCUMENT

PART NUMBER
OED-CL5093C30/C

REV.	l
В	

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR, & REDRAWN IN 3D.	12.18.02
В	E,C,N, #10949.	1.27.03

Ø5.80 [Ø0.228] — Ø5.00 [Ø0.197]

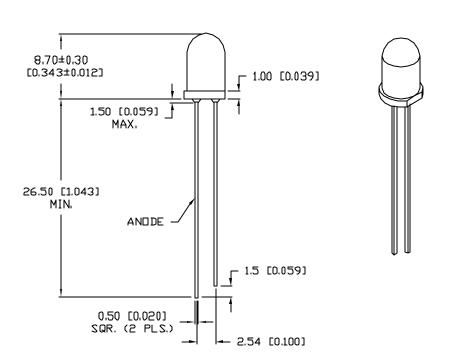

В	ELECTRO-OPTICAL CHAP	RACTERI	STICS TA=25°0	Ĵ	I <sub>f</sub> =20mA	
	PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
	PEAK WAVELENGTH		850		nm	
	SPECTRAL BANDWIDTH		45		nm	
	FORWARD VOLTAGE		1.45	1.65	$V_f$	I <sub>f</sub> =20mA
	REVERSE VOLTAGE			8.0	$V_r$	lr=10µA
	RADIANT INTENSITY	30	11		mW/SR	lf=20mA

degrees

±15

EPOXY LENS FINISH: WATER CLEAR

HALF ANGLE

## LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	1	Α
STEADY CURRENT	50	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING TEMPERATURE	- 40 TO +85	°C
STORAGE TEMPERATURE	- 40 TO + B5	<b>°</b> C
SOLDERING TEMP.	+ 260	.c
2,0mm FROM BODY		3 SEC. MAX

\* tp<100µS, tp/T=0.01

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.003), MN= +0.000 MAX.= +

B OED-CL5093C30/C

T-5mm (T-1 3/4) 850nm INFRARED LED, WATER CLEAR LENS.

CONTIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEN. NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEN. INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONTIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DESCLOSURE AND DISSEMBATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WFB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 12.29.97
PAGE: 1 OF 1
BC SCALE: N/A

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

OED-CL5093C30/C