
UNCONTROLLED DOCUMENT


PART NUMBER
OED-EL50593B20

DATE

REV.

E.C.N. NUMBER AND REVISION COMMENTS E.C.N. #10BRDR. & REDRAWN IN 3D. 12.30.02



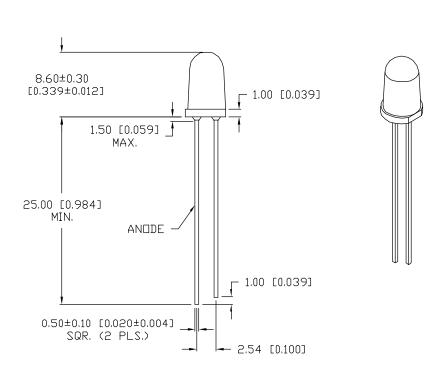

ELECTRO-OPTICAL CHA	ARACTE	RISTICS TA=25	С	$I_f = 20mA$	
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		940		nm	
SPECTRAL BANDWIDTH		45		nm	
FORWARD VOLTAGE		1.2	1.5	۷f	
REVERSE VOLTAGE	5.0			V_r	Ι _Γ =10μΑ
RADIANT INTENSITY	7.8	20		mW/SR	$I_f = 20 \text{mA}$
HALF ANGLE		±10		degrees	
EPOXY LENS FINISH:	BLUE	TRANSPARENT			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	1	A
STEADY CURRENT	50	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING TEMP.	- 40 TO +85	*C
STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+ 260	° C
2.0mm FROM BODY		3 SEC. MAX

^{*} $tp < 100 \mu S$, tp/T = 0.01

UNCONTROLLED DOCUMENT

REV. PART NUMBER OED-EL50593B20

> T-5mm (T-1 3/4) 940nm INFRARED LED, BLUE TRANSPARENT LENS.

CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

CHECKED BY: DRAWN BY:

APPROVED BY: DATE: 12.23.97

PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

OED-EL50593B20