

UNCONTROLLED DOCUMENT

PART NUMBER

В

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR.	1.7.98
В	F.C.N. #10BRDR. & REDRAWN IN 3D.	12.30.02



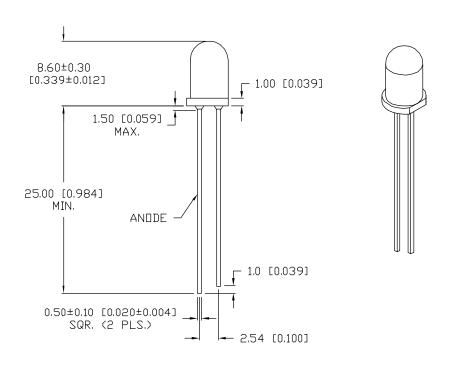

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=20mA								
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND			
PEAK WAVELENGTH		940		nm				
SPECTRAL BANDWIDTH		45		nm				
FORWARD VOLTAGE		1.2	1.5	Vf				
REVERSE VOLTAGE	5.0			٧r	$I_{\Gamma} = 10 \mu A$			
RADIANT INTENSITY	5.6	7.8		mW/SR	$I_f = 20 \text{mA}$			
HALF ANGLE		±20		degrees				
EPOXY LENS FINISH:	BLUE	TRANSPARENT						

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	1	А
STEADY CURRENT	50	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	-1.2	mW/ ' C
OPERATING TEMP.	- 40 TO +85	*C
STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+ 260	•C
2.0mm FROM BODY		3 SEC. MAX

^{*} tp<100µS, tp/T=0.01

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ±0.000 — DECIMAL PRECISION MAX.= ±0.000 — DECIMAL PRECISION M

PART NUMBER

OED-EL5093B44

T-5mm 940nm INFRARED LED, BLUE TRANSPARENT LENS. CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC.. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067–6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APF

APPROVED BY: DATE: 5.21.97 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

OED-EL5093B44