

UNCONTROLLED DOCUMENT


PART NUMBER SSI-LXMP059HGW

REV.

REV.	E.C.N.	NUMBER	AND	REVISION	COMMENTS	DATE
Α	E.C.N.	#10BRDR	. &:	REDRAWN	IN 3D.	1.7.02



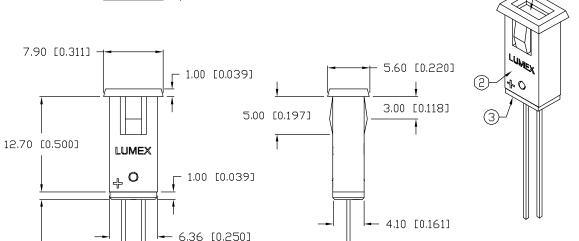

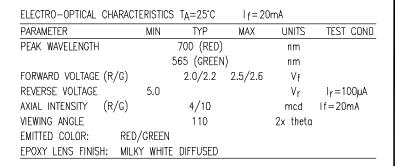

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT		25	mA
POWER DISSIPATION	(R/G)	120/105	mW
DERATE FROM 25°C		-1.2	mW∕°C
OPERATING, STORAGE TEMP.		-40 TO +85	°C
SOLDERING TEMP.		+ 260	°C
2.0mm FROM BODY			3 SEC. MAX

* t<10µS

NOTES:

- 1. SSL-LX2573HGW, RED/GREEN LED.
- 2. SSH-LXMP059-HSG, BLACK HOUSING.
- 3. SSH-LXMP059-BSG, BLACK BUSHING.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00

6.55 [0.258]

A SSI-LXMP059HGW

20.3 [0.799]

RED

ANDDE

0.50 [0.020] SQR, (2 PLS.)

RED/GREEN RECTANGULAR PANEL INDICATOR,
MILKY WHITE DIFFUSED LENS.

GREEN

ANDDE 1.50 [0.059]

2.54 [0.100]

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF
LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX
INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION
CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR
IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

PANEL CUTOUT

4.50 [0.177]

1,25~3,00 [0,049~0,118]

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT
SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.
PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY:

APPROVED BY: DATE: 1.28.00 PAGE: 1 OF 1 SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSI-LXMP059HGW