
PART NUMBERREV.SSL-LX5063SIDAREV.E.C.N. NUMBER AND REVISION COMMENTSDATEAE.C.N. #1114810.31.06

¢5.00 [¢0.197]

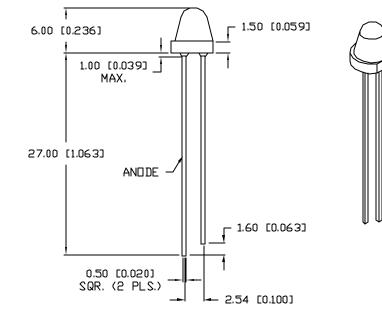

electro-optical ch					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		636		nm	
FORWARD VOLTAGE		2.0	2.5	Vf	
REVERSE VOLTAGE	5.0			Vr	lr=100μΑ
AXIAL INTENSITY		400		med	lf=20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	RED DIF	FUSED			

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	тW
DERATE FROM 25°C	- 1.2	mW/"C
OPERATING, STORAGE TEMP.	- 40 TO + 85	' C
Soldering Temp.	+ 260	' C
2.0mm FROM BODY		3 SEC. MAX

Α

	*Unless otherwise specified tolerances per decinal precision are; x=±1 (±0.034	9), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). Ц	L/// AD SIZE=±0.05 (±0.002), (CONTRO LEAD LENGTH=±0.75 (±0.03	ZZED DOCU 30). MN= +DECINAL PRECISION WAX.=	HOOD -DECIMAL PRECISION
RE		<u>confidential information</u> The information contaned in this document is the property of Lumex NG, except as specifically authorized in writing by Lumex	LUA	E A PAL	D E. HELEN ROAD ATINE, IL 60067-69	
/	SSL-LX5063SID		US WEB: www.lumex.com			
	T-5mm (T-1 3/4) 636nm SUPER INTENSITY RED LED,	<u>Reliability note</u> Our nany years of experience data accumulation indicate that	DRAWN BY:		APPROVED BY: DATE:	10 <i>.</i> 31.06
	RED DIFFUSED LENS,	SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. Please pay attention to your soldering process.	JC		PAGE SCAL	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSL-LX5063SID