

UNCONTROLLED DOCUMENT

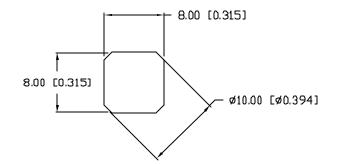

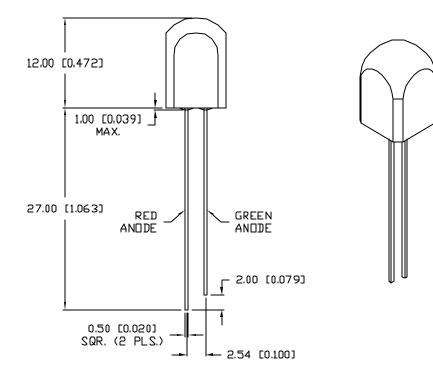

PART NUMBER SSL—LX88123HGW

EV. E.C.N. NUMBER AND REVISION COMMENTS DATE

A E.C.N. #11148 11.13.06

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If=2		$I_f = 20$)mA		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		700 (RED)		nm	
	565 (GREEN)			nm	
FORWARD VOLTAGE (R/G)		2.0/2.2	2.5/2.6	۷f	
reverse voltage	5.0			٧r	Aس(100 = Ir
AXIAL INTENSITY		10		med	If = 20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR: RED	/CREEN				
EPOXY LENS FINISH: MILL	CY WHITE	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	CΩLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT		25	mΑ
POWER DISSIPATION	(R/G)	120/105	mW
DERATE FROM 25°C		-1.2	mW/°C
OPERATING, STORAGE TEMP.		-40 TO +85	Ċ
SOLDERING TEMP.		+ 260	. C
2.0mm FROM BODY			3 SEC. MAX

* t<10µS



REV.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECINAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.00 MAX

A SSL-LX88123HGW

8mm x 8mm SQUARE BICOLOR LED, 700nm RED/565nm GREEN, MILKY WHITE DIFFUSED LENS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISOLOGISURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 11.13.06
PAGE: 1 OF 1
JC SCALE: N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex:

SSL-LX88123HGW