
## UNCONTROLLED DOCUMENT

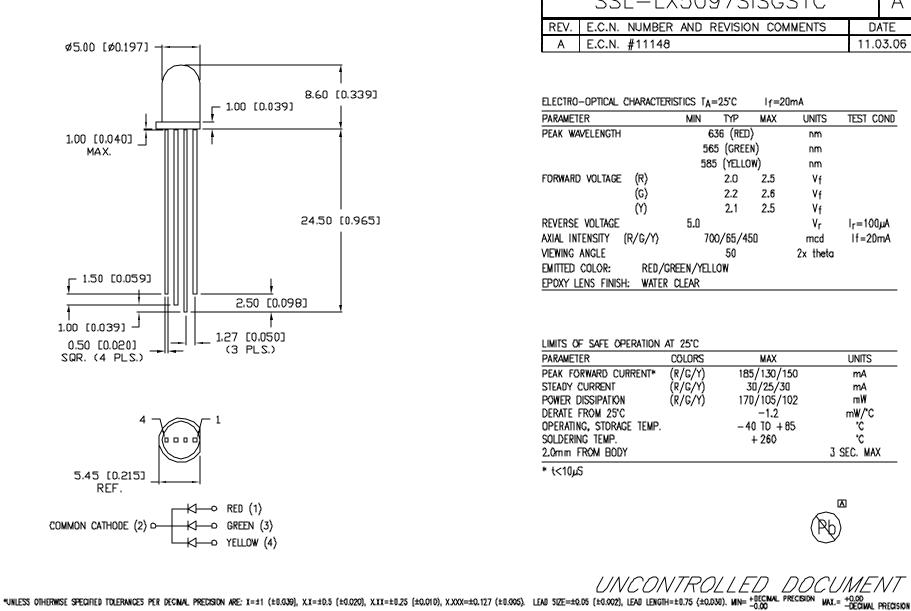

	REV.	
	SSL-LX5097SISGSYC	А
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148	11.03.06

## ELECTRO-OPTICAL CHARACTERISTICS TA=25°C lf=20mA

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	(	636 (RED)		nm	
	56	5 (GREE	N)	nm	
	58	5 (YELLO	) W)	nm	
FORWARD VOLTAGE (R)		2.0	2.5	۷f	
(G)		2.2	2.6	۷f	
(Y)		2.1	2.5	۷f	
REVERSE VOLTAGE	5.0			۷r	Aµ001=1
AXIAL INTENSITY (R/G/	YY) 70	20/65/4	50	mcd	lf=20mA
VIEWING ANGLE		50		2x theta	
EMITTED COLOR: R	ED/GREEN/YEL	LOW			
EPOXY LENS FINISH: W	ATER CLEAR				

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*	(R/G/Y)	185/130/150	mA
STEADY CURRENT	(R/G/Y)	30/25/30	mA
POWER DISSIPATION	(r/g/y)	170/105/102	mW
DERATE FROM 25°C		-1.2	mW/"C
OPERATING, STORAGE TEMP.		-40 TD +85	ŕĊ
Soldering Temp.		+ 260	Ċ
2.0mm FROM BODY			3 SEC. MAX

\* t<10µS



REV.	PART NUMBER	<u>confidential information</u> The information contained in this document is the property of	1 11A	) E. HELEN ROA ATINE, IL 600	ар 67—6976 🛛
А	SSL-LX5097SISGSYC	LUMEX NG, EXCEPT AS SPECFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FORM DISCISSIONE AND DISSEMINATION TO ALL THRO PARTIES.	EA TACM Stokana In Wa	NE: +1.847.35 WEB: www.lume WEB: www.lume	9,2790 x.com
	T–5mm (T–1 3/4) RED/GREEN/YELLOW LED, COMMON CATHODE, 0.05" LEAD SPACING, WATER CLEAR LENS.	In part from ubcligging and dissembation to all thro parties. <u>Reliability note</u> Our nany years of experience data accumulation indicate that solder heat is a major cause of early and future failure. Please pay attention to your soldering process.	DRAWN BY:	APPROVED BY:	

## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lumex: SSL-LX5097SISGSYC