
Transformer, 1:2 Transmission Line Balun 5 MHz - 1200 MHz MACOM

#### Features

- 1:2 impedance ratio
- Transmission line Transformer
- Surface mount
- Available on tape and reel
- 260°C reflow compatible
- RoHS Compliant and Pb free
- Excellent temperature stability
- Can be used on  $50\Omega$  and  $75\Omega$  systems



#### Schematic

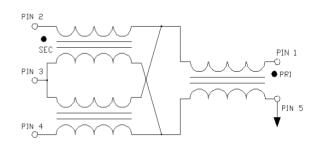

#### **Pin Configuration**

Pin No.	Function		
1	Input (PRI dot)		
2	Output 1 (SEC dot)		
3	Centre tap (RF Ground)		
4	Output 2 (SEC)		
5	5 Ground (PRI)		

#### **Ordering Information**

Part Number	Description		
MABA-011029	Tape & Reel		
MABA-011029-TB	Customer Evaluation Board		

1

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.

## Transformer, 1:2 Transmission Line Balun 5 MHz - 1200 MHz



Rev. V3

## **Electrical Specifications:** $Z_0 = 75\Omega$ , $T_A = 25^{\circ}C$ , $P_{in} = 0dBm$

Parameter	Conditions	Units	Min	Тур	Max
Frequency Range		MHz	5		1200
Impedance		Ω		75	
Impedance Ratio				1:2	
Insertion Loss 1 (Pin 1 to pin 2)	5 - 50 MHz 50 - 400 MHz 400 -1000 MHz 1000 -1200 MHz	dB dB dB dB		0.30 0.50 0.90 1.60	0.40 0.80 2.00 2.70
Insertion Loss 2 (Pin 1 to pin 4)	5 - 50 MHz 50 - 400 MHz 400 -1000 MHz 1000 -1200 MHz	dB dB dB dB		0.50 0.70 1.50 2.40	0.60 1.20 3.00 3.90
Amplitude Balance	5 - 50 MHz 50 - 400 MHz 400 -1200 MHz	dB dB dB	-0.30 -0.90 -2.20	0.10 0.20 0.50	0.30 0.90 2.20
Phase Balance	5 - 50 MHz 50 - 400 MHz 400 -1000 MHz	0 0 0	-2.0 -6.0 -9.0	0.20 0.70 0.50	2.0 6.0 9.0
Input Return Loss (Pin 1)	5 - 50 MHz 50 - 400 MHz 400 -1000 MHz 1000 -1200 MHz	dB dB dB dB	20 18 9 7	27 28 16 12	

#### **Tape & Reel Information**

<b>_</b>	Parame			
Recommended Maximum	Qty per i			
Parameter	Units	Min	Max	Reel Si
Input Power	mW		250	Tape Wi
DC Current	mA		600	Pitch
Operating Temperature Range	°C	-40	+85	Ao
L	1	1	J]	Bo

Temperature data available on request


Parameter	Units	Value		
Qty per reel	-	900		
Reel Size	mm	330		
Tape Width	mm	16.00		
Pitch	mm	12.00		
Ao	mm	6.70		
Во	mm	7.50		
Ko	mm	3.60		
Orientation	-	F33		
Reference Application Note ANI-019 for orientation				


2

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit <u>www.macom.com</u> for additional data sheets and product information.


### Transformer, 1:2 Transmission Line Balun 5 MHz - 1200 MHz

### **Outline Drawing**

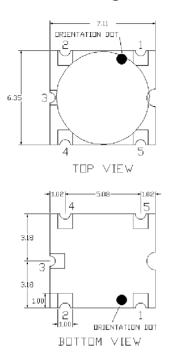




#### **Recommended Footprint**

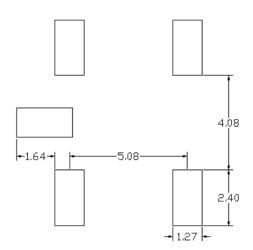

### RECOMENDED FOOTPRINT

- 1. Dimensions in mm.
- 2. Tolerance: ±0.2mm unless otherwise noted.
- 3. Model number and lot code printed on reel.
- 4. Plating finish: ENIG on both sides, 0.05 to 0.1 µm gold over 3 to 6 µm nickel

# **Application Circuit**

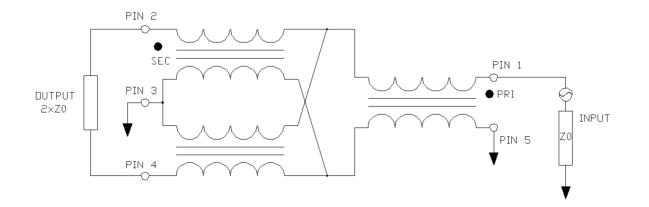

3

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

For further information and support please visit: <u>https://www.macom.com/support</u>


МАСОМ

Rev. V3



## Transformer, 1:2 Transmission Line Balun 5 MHz - 1200 MHz

Rev. V3

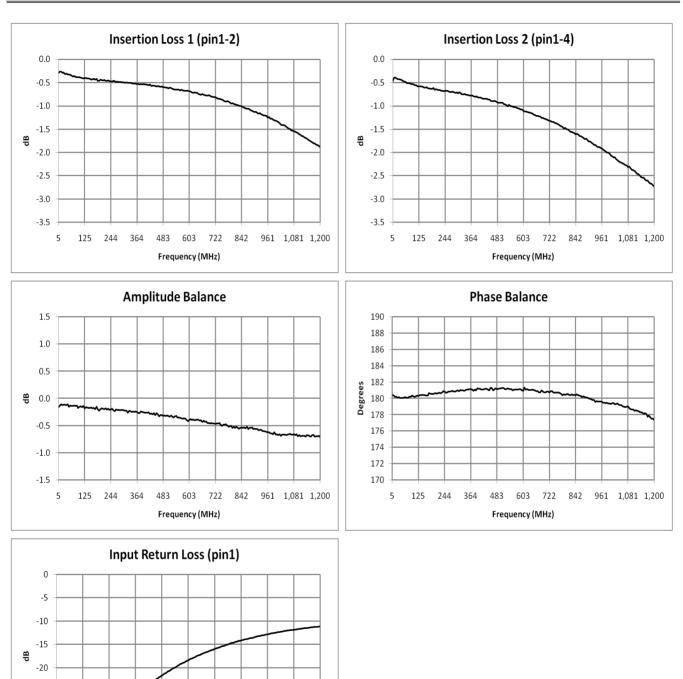

4

-25 -30 -35

5

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

842 961 1,081 1,200

125

244 364

483 603 722

Frequency (MHz)

Transformer, 1:2 Transmission Line Balun 5 MHz - 1200 MHz



Rev. V3

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.

<sup>5</sup> 

M/A-COM Technology Solutions Inc. (MACOM) and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.macom.com for additional data sheets and product information.

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

MACOM: MABA-011029