
MALLORY Mallory Sonalert Products, Inc.					Part #: JTC028-R-CDL		
Sales Outline Drawing				Revisio	<b>A</b>		
Specifications:							
Stack Number:	1						
LED Color:	RED						
LED Operation:	Continuous						
Connection Wires:	Red and Brown						
LED Current Draw:	<50 mA						
Rated Voltage:	24 VAC/DC						
Operating Voltage:	20-28 VAC/DC						
Sound Level Category:	Loud	Loud	Loud		Loud		
Mode of Operation:	Continuous	Medium Pulse (5PPS)	Double Pulse (0.5F	PPS)	Continuous for 5 sec then 0.1s beep until reset		
Connection:	Black and Gray Wires	Black and Gray Wires;		; Purple	Black and G	Gray wires; Orange and	
		Orange wire connected	wire connected	wire connected to		Purple wires connected to	
		to Green/Yellow wire	Green/Yellow wire		Green/Yellow wire		
Sound Current Draw:	40mA Max.	40mA Max.	40mA Max.		40mA Max.		
Loudness @ 1m:	80-85 dB(A) Typ.						
Frequency:	2000 ± 500 Hz						
Total Max Current:	<90mA with all LED's and sound unit working						
Operating Temperature:	-25° ~ +60°C						
Lens Color:	Transparent - matching LED stack color						
Material:	Lexan CFR7431						
Mounting Method:	Direct Mount using 1/2" NPT Stainless Steel Pipe and Nut						
Weight Typical (g):	270						
NEMA 12:		Approved					
Options:	Please contact factory.						

**Dimensions:** Inches (mm)

## **cUL Recognized CE Certified**

**ROHS Compliant** 

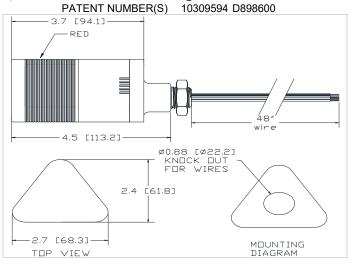

LED OPERATION: CONNECT STACK COLOR WIRE TO POWER AND BROWN WIRE TO POWER.

SOUND OPERATION: CONNECT GRAY AND BLACK WIRES TO POWER FOR CONTINUOUS SOUND.

FOR MEDIUM PULSE, CONNECT GRAY & BLACK TO POWER AND ORANGE WIRE TO GREEN/YELLOW WIRE.

FOR DOUBLE PULSE, CONNECT GRAY & BLACK TO POWER AND PURPLE WIRE TO GREEN/YELLOW WIRE.

FOR CONT/BEEP, CONNECT GRAY & BLACK TO POWER AND ORANGE & PURPLE TO GREEN/YELLOW WIRE.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mallory Sonalert:

JTC028-R-CDL