
Mallory Sonalert Products,Inc.		Part #:	SBT12XHPC	
Sales Outline Drawing		Revision:	D	
Specifications: cUL Recognized to IEC60601-1-8 AMD1 Oxygen Melody - High Priority Only			-8 AMD1	
			ority Only	
Sound Level Category:		Loud		
Mode of Operation:	High Priority Alarm - 10	High Priority Alarm - 10 beeps repeating every 2.5 sec		
Voltage Rating:	9 t	9 to 12 VDC		
Frequency:	150	150 to 4000 Hz		
Loudness @ 10cm:	85 to 9	85 to 95 dB(A) Typ.		
Average Current Draw:	<2	<25mA Typ.		
lpk Current*:		75mA		
Housing Material:	ABS 777D F	ABS 777D Plastic Resin, Black		
Storage Temperature:	-40°	-40° to +85° C		
Operating Temperature:	-30°	-30° to +65° C		
Weight Typical:	0.6	0.6 oz (17g)		
Options:	Please of	Please contact factory.		
Condition by wave solder (°C)	260 ±	260 ± 5 within 5 sec		
Condition by hand solder (°C)	350 ± 2	350 ± 20 within 5 sec		

Dimensions: Inches (mm) CUL Recognized ROHS Compliant
PATENT NUMBER: 7880593

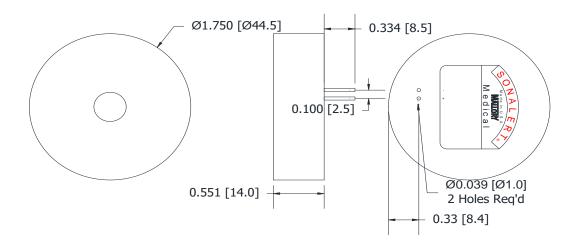

tolerances:

±0.01 [±0.3] ±0.005 [±0.1]

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mallory Sonalert: SBT12XHPC