



HTT Series

For all variants of the HTT50A and HTT70A

Hardware Manual

Revision 1.0



Contents

Introduction	3
Features	3
Extended Display Information Data (EDID).....	3
Part Numbering Scheme	4
Options.....	4
Power Options	4
USB Drivers	4
HTT50A Technical Specifications	6
Available Headers	6
HDMI Port	6
Mini USB.....	6
Optical Characteristics	7
Environmental Characteristics	7
Power	7
Dimensional Drawing	8
HTT70A Technical Specifications	9
Available Headers	9
HDMI Port	9
Mini USB.....	9
Barrel Jack	9
Optical Characteristics	10
Environmental	10
Power	10
Dimensional Drawing	11
Recommended Accessories	12
USB Communication	12
HDMI Cable	12
External Power	12
Support	12
Contact.....	12

Revision History


Revision	Date	Description	Author
1.0	November 6, 2017	First Release	Henry Jakl

Introduction

The HTT series offers full colour TFT displays, with a simple HDMI and USB plug and play interface. The HTT can be configured with a touch screen, providing control without the need of a mouse or keyboard. Designed with industrial applications in mind, the HTT is perfect for panel mounted applications and HMI interfaces.

Features

- Plug and Play
- Works with Raspberry Pi, Windows, Linux and other systems
- Available Sizes
 - 5.0" 800x480 24bit RGB
 - 7.0" 800x480 24bit RGB
- USB for touch screen, HMI mouse interface
- Available in:
 - Non-touch,
 - Resistive touch
 - Capacitive touch
- Upgradable touch driver firmware
- DVI/HDMI interface
- Automatic resolution detected provided by EDID
- Low profile mounting holes
- Power through USB (HTT50A)
- Industrial 5-35V power input (-VPT) option

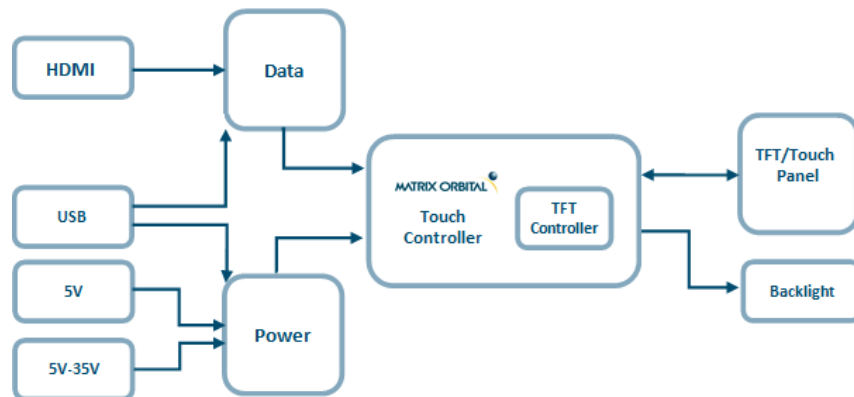

Extended Display Information Data (EDID)

The HTT's on-board EDID comes preconfigured, so users won't have to worry about setting up their screen resolution or display timings. Once plugged in, the EDID will automatically detect the HTT display resolution.

Part Numbering Scheme

Table 1: Part Numbering Scheme

HTT	70	A	-TPR	-BLM	-B0	-H1	-CH	-V5
1	2	3	4	5	6	7	8	9

Options

Table 2: Display Options

#	Designator	Options
1	Product Type	HTT: Graphic TFT Display
2	Display Size	50: 5.0", 70: 7.0"
3	Screen Type	A: A Type
4	Touch	-TPN: No touch panel -TPR: Resistive touch panel -TPC: Capacitive touch panel
5	Backlight	-BLM: 300 Nit < Brightness < 600 Nit -BLH: 600 Nit < Brightness < 1000 Nit -BLD: Brightness > 1000 Nit
6	Bezel	-B0: None
7	Headers	-H5: Horizontal Connectors -H6: Vertical Connectors
8	Protocol	-CH: HDMI interface
9	Voltage	-V5: 5.0V Input Voltage -VPT: Regulated 5V - 35V Input Voltage

Power Options

-V5: Power through the USB port, 4.5-5.5V

-VPT: Power through a 2-pin header, 5–35V, industrial applications

USB Drivers

Once the HTT is properly installed in windows, 3 new devices will be present in Device manager.

- HID-Compliant Mouse
- USB Composite Device
- WinUsb Device

Table 3: HTT Device VID/PID

VID	0x1B3D
PID	0x14C2

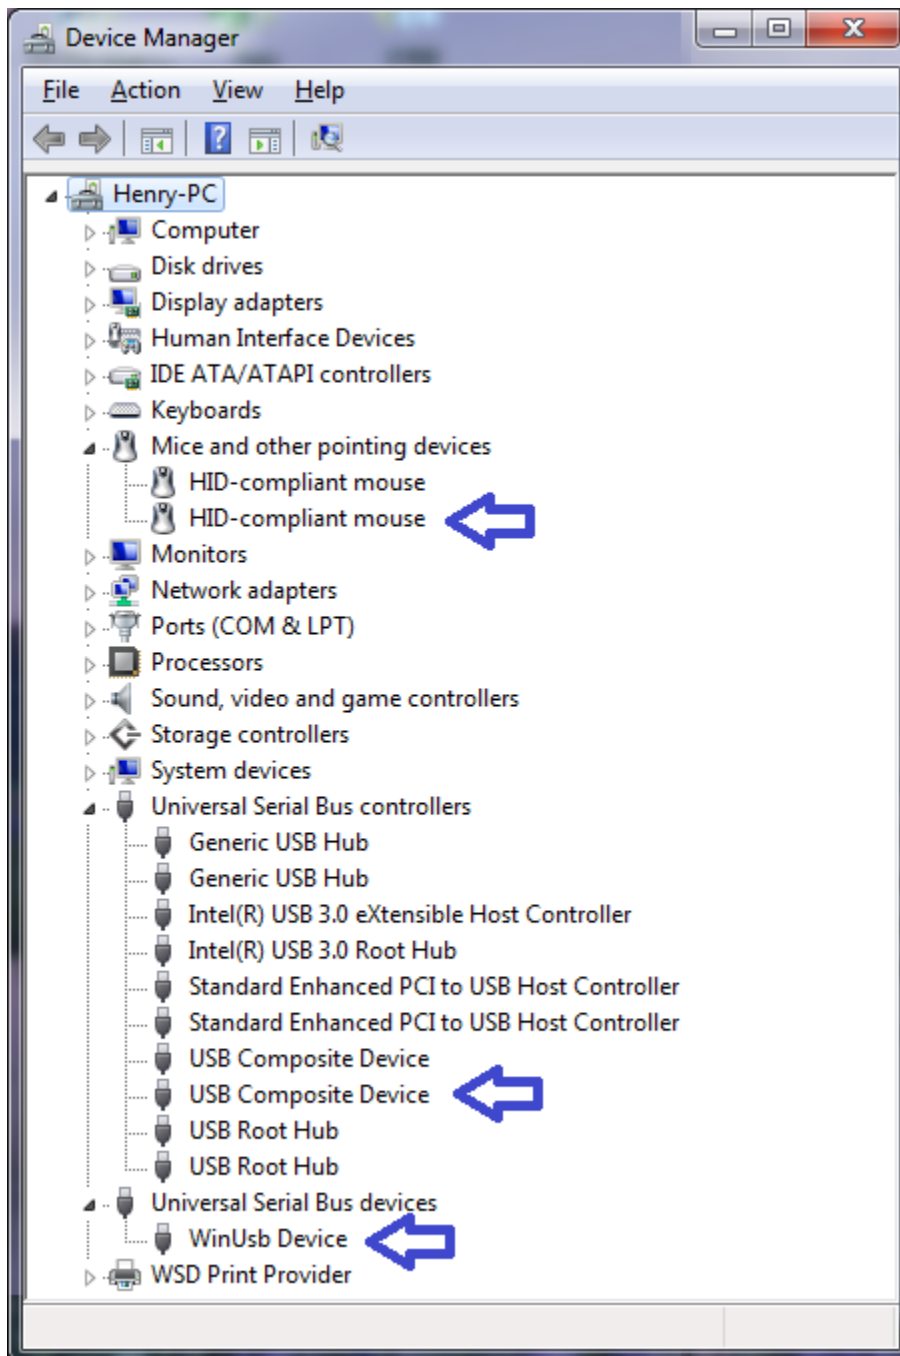


Figure 1: HTT USB Driver Listing

HTT50A Technical Specifications

The HTT50 is a 5.0" TFT display with an HDMI interface. The 800x480 resolution offers crisp images, and video feedback, with 24-bit Full colour capabilities. The HTT can be configured with resistive, capacitive, or non-touch panels, making this display suitable for any application.

Available Headers

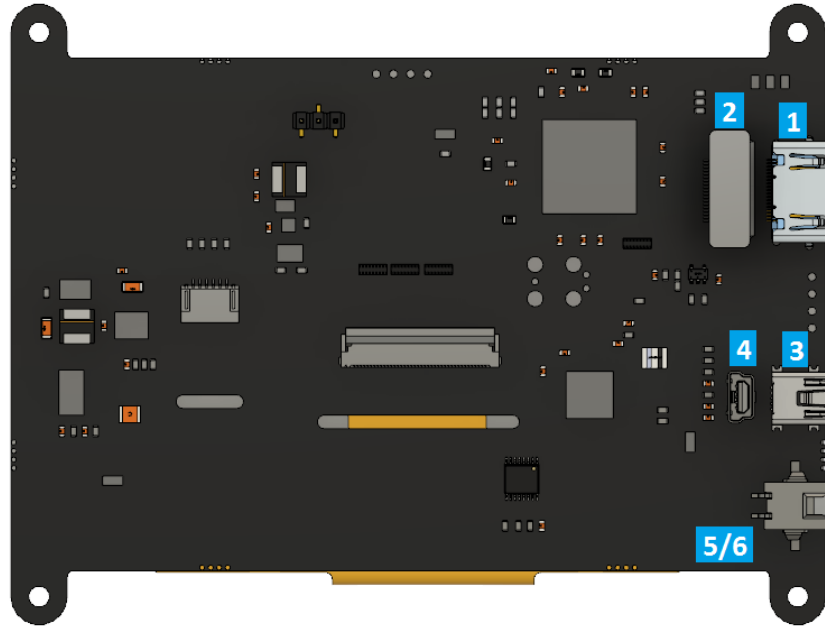


Table 4: HTT50A Headers and Mates

#	Header	Standard Mate	Population
1	HDMI Port, Horizontal, Type A Standard	Type A Standard HDMI	-H5
2	HDMI Port, Vertical, Type A Standard	Type A Standard HDMI	-H6
3	Mini USB, Horizontal: Touch & Power	Mini-B USB	-H5
4	Mini USB, Vertical: Touch & Power	Mini-B USB	-H6
5	Barrel Jack: 2.1mm Center Positive	PWR-ACDC-5V2A	Optional
6	External Power, 2-1445057-2	Micro MATE-N-LOCK 1445022-2	-VPT model

HDMI Port

The HTT uses HDMI/DVI 1.0 and is only compatible with unencrypted video signals. HDCP video signals are not supported.

Mini USB

Up to 500mA of power can be provided through the Mini-USB header to power the HTT. Touch communication also occurs over USB.

Optical Characteristics

Table 5: HTT50A Optical Characteristics

Module Size	121.20 x 92.25 x 12.07	mm
Viewing Area	110.70 x 67.40	mm
Active Area	108.00 x 64.80	mm
Pixel Pattern	800 x 480 x 24bit RGB	
Pixel Pitch	0.135 x 0.135	mm
Luminance	380	cd/m ²
Viewing Angle	70° Left, Right, Up 50° Down	
Contrast Ratio	500:1	
Backlight Half-Life	20,000 hours	

Environmental Characteristics

Table 6: HTT50A Environmental Characteristics

Operating Temperature	0°C to +70°C
Storage Temperature	-30°C to +80°C
Operating Relative Humidity*	90% (T < 60°C)

*Note: No condensation at any temperature

Power

Table 7: HTT50A Maximum Power Characteristics

Parameter	Min	Typ	Max	Unit	Remarks
Supply Voltage	4.75	5.0	5.25	V	Standard Voltage (V5)
	9.0	12.0	35.0	V	Wide Voltage (VPT)

Table 8: HTT50A Typical Power Characteristics

Parameter	Min	Typ	Max	Unit	Remarks
Logic	-	275	-	mA	Backlight Off
Backlight	0	-	225	mA	Off, Mid, Max

Dimensional Drawing

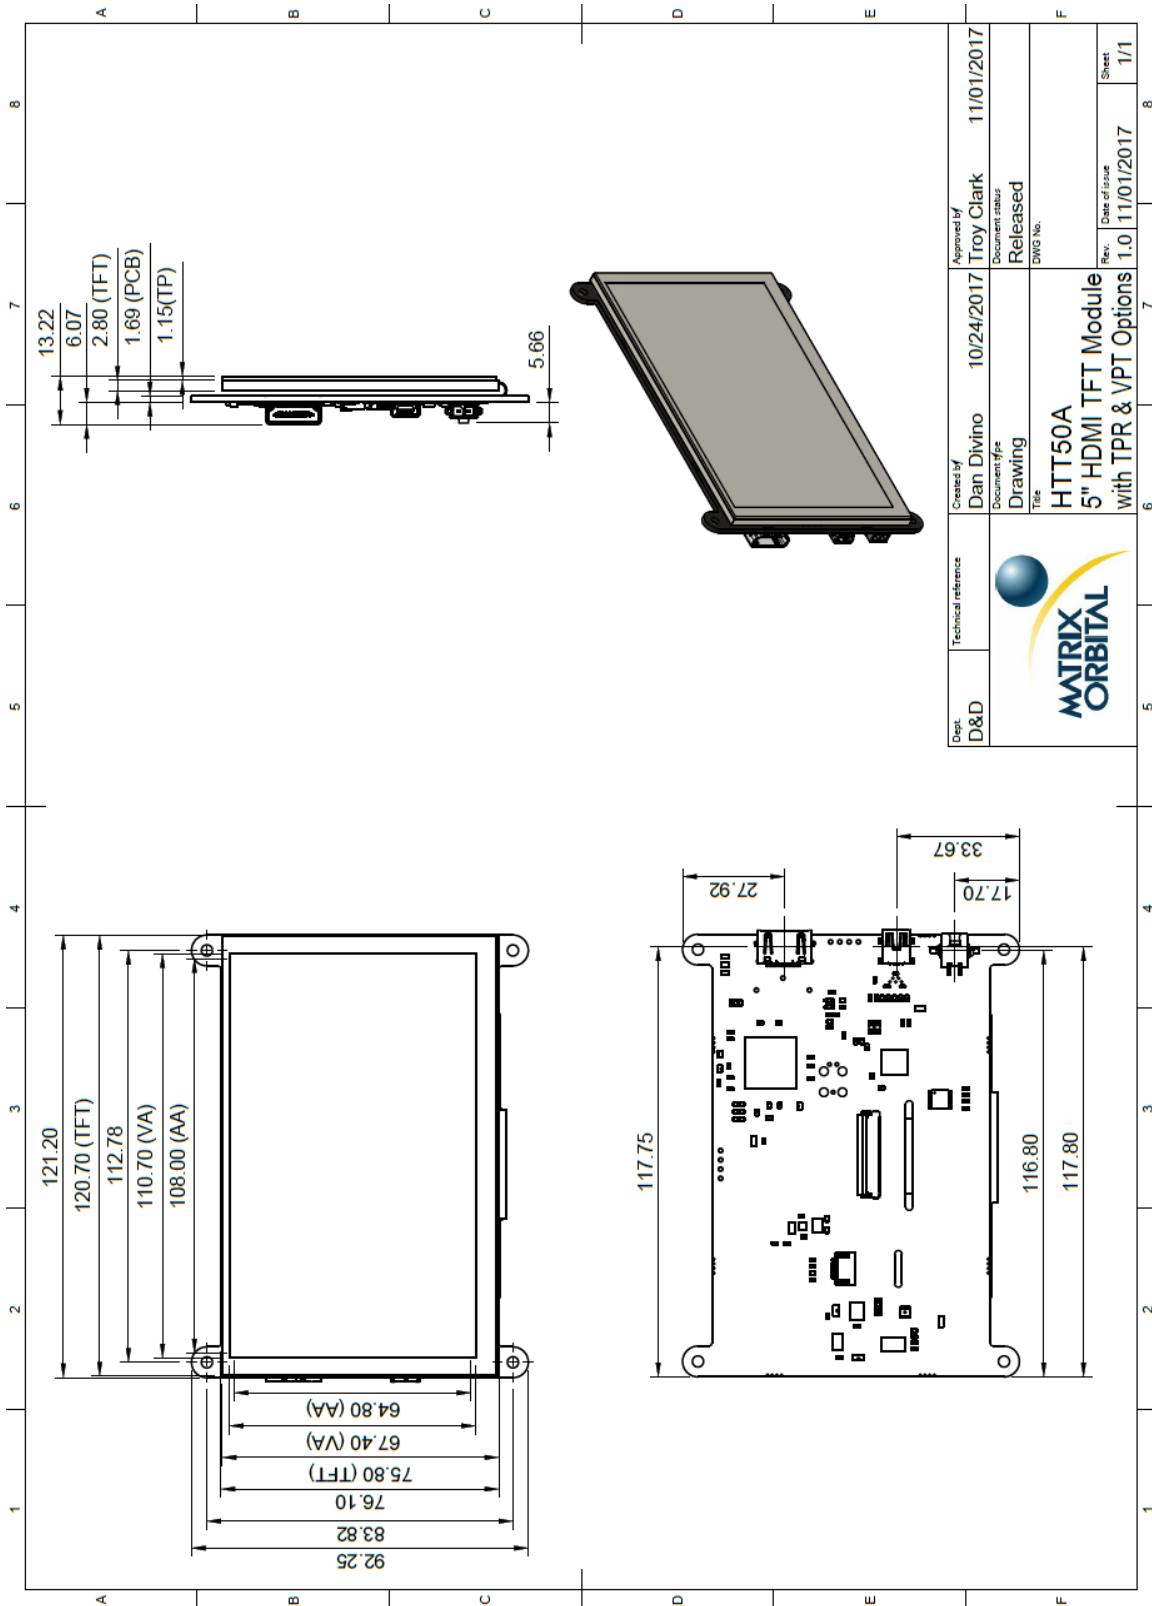


Figure 2: HTT50A Dimensional Drawing

HTT70A Technical Specifications

The HTT70A is a HDMI compatible 7.0" Full color TFT, with an 800x480 resolution. Resistive, capacitive, and non-touch panels are available for the HTT70A, making it suitable for any application.

Available Headers

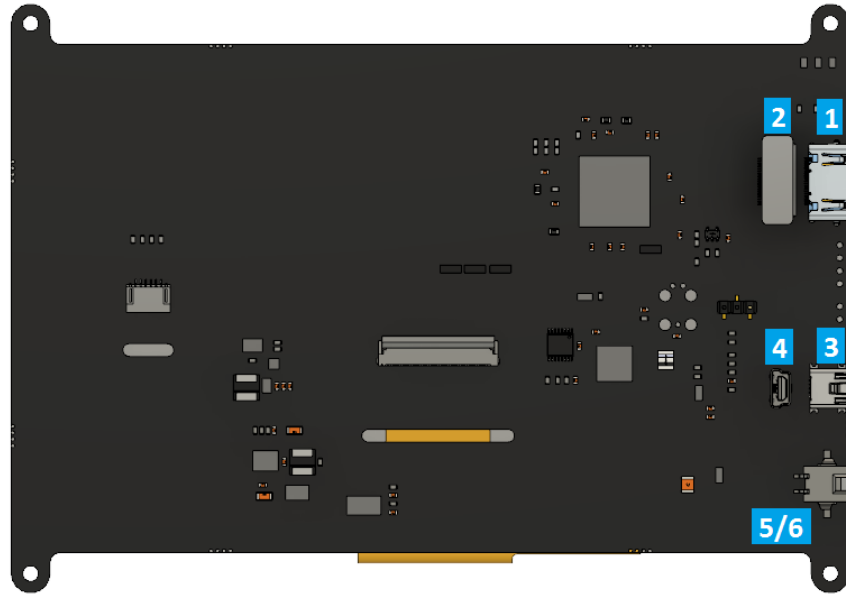


Table 9: HTT70A Headers and Mates

#	Header	Standard Mate	Population
1	HDMI Port, Horizontal, Type A Standard	Type A Standard HDMI	-H5
2	HDMI Port, Vertical, Type A Standard	Type A Standard HDMI	-H6
3	Mini USB, Horizontal: Touch & Power	Mini-B USB	-H5
4	Mini USB, Vertical: Touch & Power	Mini USB	-H6
5	Barrel Jack: 2.1mm Center Positive	PWR-ACDC-5V2A	-H6
6	External Power, 2-1445057-2	Micro MATE-N-LOCK 1445022-2	-VPT model

HDMI Port

The HTT uses HDMI/DVI 1.0 and is only compatible with unencrypted video signals. HDCP video signals are not supported.

Mini USB

Up to 500mA of power can be provided through the Mini-USB header to power the HTT. Touch communication also occurs over USB.

Barrel Jack

Additional 5V power can be applied to the display through the barrel jack header. It is recommended that 900mA is supplied to the display.

Optical Characteristics

Table 10: HTT70A Optical Characteristics

Module Size	164.90 x 115.88 x 12.77	mm
Viewing Area	157.00 x 89.10	mm
Active Area	153.84 x 85.63	mm
Pixel Pattern	800 x 480 x 24bit RGB	
Pixel Pitch	0.1923 x 0.1784	mm
Luminance	520	cd/m ²
Viewing Angle	70° Left, Right, Up 60° Down	
Contrast Ratio	500:1	
Backlight Half-Life	20,000 hours	

Environmental

Table 11: HTT70A Environmental Characteristics

Operating Temperature	0°C to +70°C
Storage Temperature	-30°C to +80°C
Operating Relative Humidity*	90% (T < 60°C)

***Note:** No condensation at any temperature

Power

Table 12: HTT70A Maximum Power Characteristics

Parameter	Min	Typ	Max	Unit	Remarks
Supply Voltage	4.75	5.0	5.25	V	Standard Voltage (V5)
	9.0	12.0	35.0	V	Wide Voltage (VPT)

Table 13: HTT70A Typical Power Characteristics

Parameter	Min	Typ	Max	Unit	Remarks
Logic	-	375	-	mA	Backlight Off
Backlight	0	-	465	mA	Off, Mid, Max

Dimensional Drawing

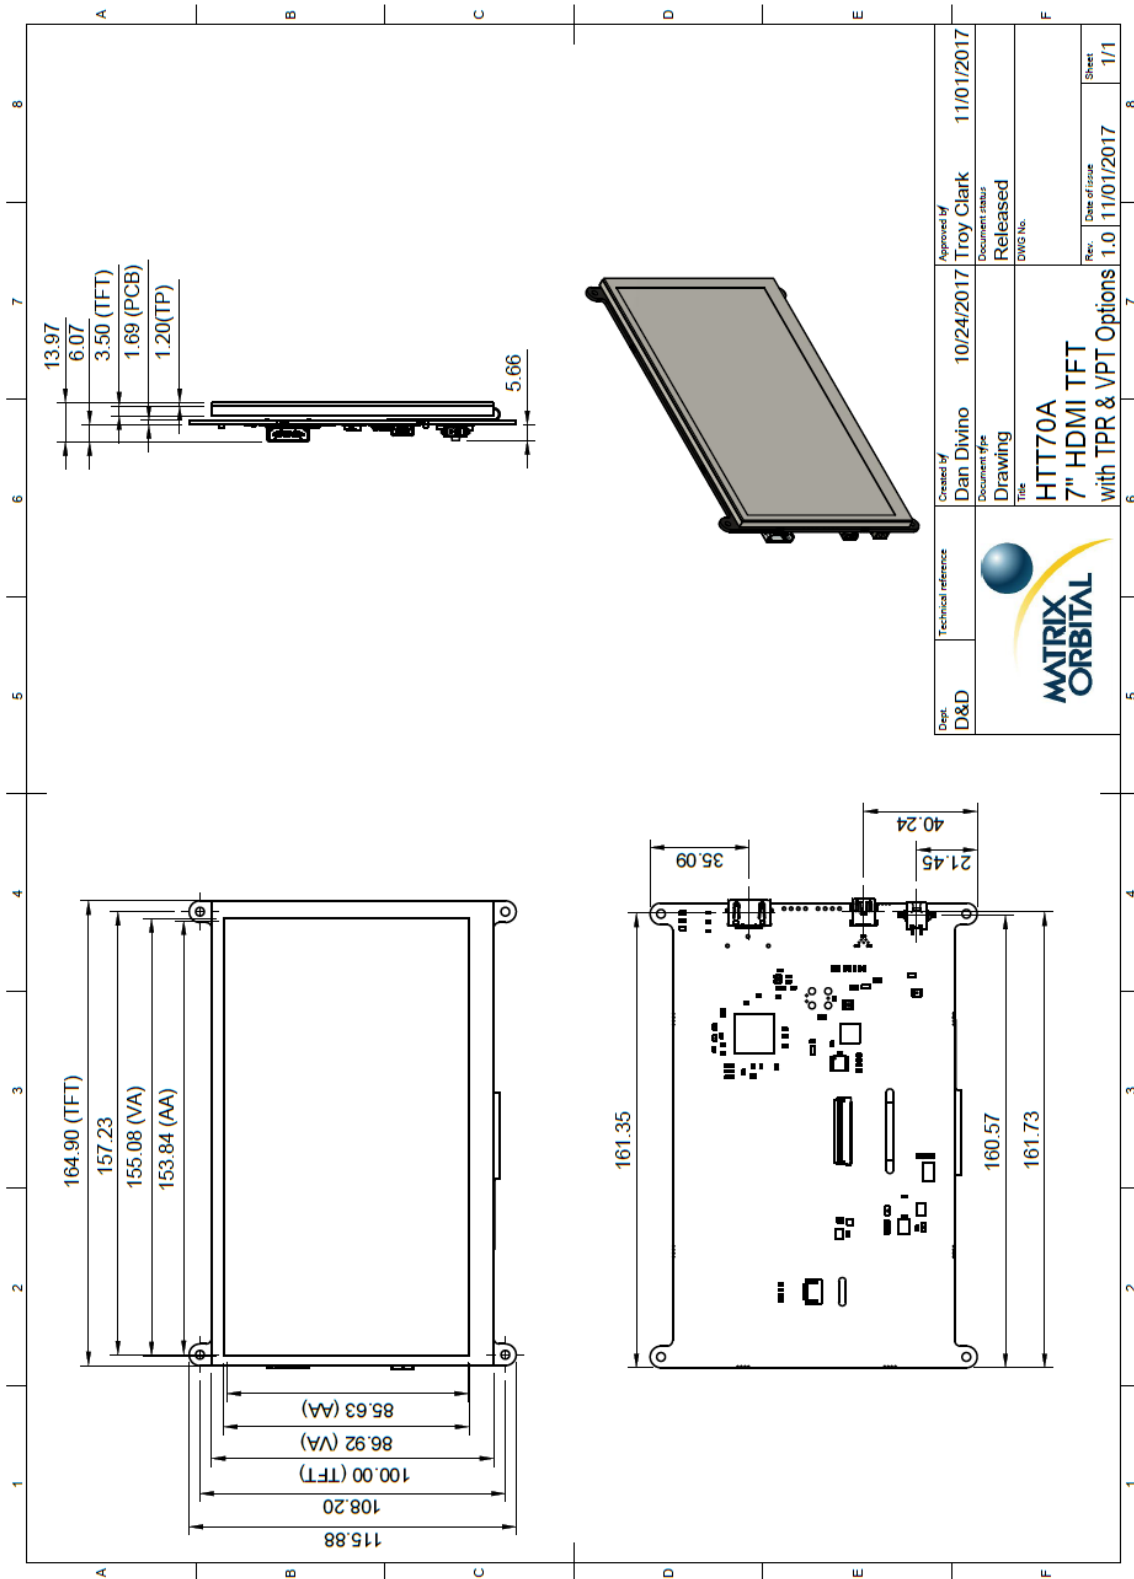


Figure 3: HTT70A Dimensional Drawing

Recommended Accessories

USB Communication



Figure 4: EXTMUSB3FT

EXTMUSB3FT

3ft (1m) Mini-B USB Cable

HDMI Cable



Figure 5: HDMI Cable

3ft (1m) HDMI Cable

6ft (2m) HDMI Cable

External Power



Figure 6: PWR-ACDC-5V2A

PWR-ACDC-5V2A

Input Voltage: 100-240V AC

Output Voltage: 5V DC @ 2A

Length: 9ft / 2.7m

Barrel Jack: 2.1mm Center Positive

AC Plugs Included: North American (NEMA), Europlug (Type C), UK (Type G),
Australia/China/New Zealand/Argentina (Type I)

Support

Phone: 403.229.2737

Email: support@matrixorbital.ca

Manuals and Drivers: <http://www.matrixorbital.ca>

Forums: <http://www.lcdforums.com/forums>

Contact

Sales

Phone: 403.229.2737

Email: sales@matrixorbital.ca

Support

Phone: 403.229.2737

Email: support@matrixorbital.ca

Online

Purchasing: www.matrixorbital.com

Support: www.matrixorbital.ca

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Matrix Orbital:

[HTT70A-TPR-BLM-B0-H5-CH-VPT](#) [HTT50A-TPR-BLM-B0-H5-CH-VPT](#) [HTT70A-TPN-BLM-B0-H5-CH-V5](#) [HTT50A-TPN-BLM-B0-H6-CH-V5](#) [HTT70A-TPC-BLM-B0-H5-CH-VPT](#) [HTT70A-TPC-BLM-B0-H5-CH-V5](#) [HTT70A-TPR-BLM-B0-H6-CH-VPT](#) [HTT50A-TPC-BLM-B0-H5-CH-V5](#) [HTT50A-TPC-BLM-B0-H6-CH-VPT](#) [HTT50A-TPN-BLM-B0-H6-CH-VPT](#) [HTT70A-TPC-BLM-B0-H6-CH-V5](#) [HTT70A-TPN-BLM-B0-H5-CH-VPT](#) [HTT70A-TPN-BLM-B0-H6-CH-V5](#) [HTT50A-TPR-BLM-B0-H6-CH-V5](#) [HTT50A-TPN-BLM-B0-H5-CH-VPT](#) [HTT70A-TPR-BLM-B0-H6-CH-V5](#) [HTT70A-TPC-BLM-B0-H6-CH-VPT](#) [HTT70A-TPR-BLM-B0-H5-CH-V5](#) [HTT50A-TPC-BLM-B0-H5-CH-VPT](#) [HTT50A-TPN-BLM-B0-H5-CH-V5](#) [HTT50A-TPR-BLM-B0-H6-CH-VPT](#) [HTT50A-TPR-BLM-B0-H5-CH-V5](#) [HTT70A-TPN-BLM-B0-H6-CH-VPT](#) [HTT50A-TPC-BLM-B0-H6-CH-V5](#)