



±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

General Description

The MAX3230E/AE and MAX3231E/AE are +2.5V to +5.5V powered EIA/TIA-232 and V.28/V.24 communications interfaces with low power requirements, high data-rate capabilities, and enhanced electrostatic discharge (ESD) protection, in a chip-scale package (UCSP™) and WLP package. All transmitter outputs and receiver inputs are protected to ±15kV using IEC 1000-4-2 Air-Gap Discharge, ±8kV using IEC 1000-4-2 Contact Discharge, and ±15kV using the Human Body Model.

The MAX3230E/AE and MAX3231E/AE achieve a 1µA supply current with Maxim's AutoShutdown™ feature. They save power without changing the existing BIOS or operating systems by entering low-power shutdown mode when the RS-232 cable is disconnected, or when the transmitters of the connected peripherals are off.

The transceivers have a proprietary low-dropout transmitter output stage, delivering RS-232-compliant performance from a +3.1V to +5.5V supply, and RS-232-compatible performance with a supply voltage as low as +2.5V. The dual charge pump requires only four, small 0.1µF capacitors for operation from a +3.0V supply. Each device is guaranteed to run at data rates of 250kbps while maintaining RS-232 output levels.

The MAX3230E/AE and MAX3231E/AE offer a separate power-supply input for the logic interface, allowing configurable logic levels on the receiver outputs and transmitter inputs. Operating over a +1.65V to V_{CC} range, V_L provides the MAX3230E/AE and MAX3231E/AE compatibility with multiple logic families.

The MAX3231E/AE contains one receiver and one transmitter. The MAX3230E/AE contains two receivers and two transmitters. The MAX3230E/AE and MAX3231E/AE are available in tiny chip-scale and WLP packaging and are specified across the extended industrial (-40°C to +85°C) temperature range.

Applications

Personal Digital Assistants
Cell-Phone Data Lump Cables
Set-Top Boxes
Handheld Devices
Cell Phones

Typical Operating Circuits continued at end of data sheet.

Pin Configurations appear at end of data sheet.

UCSP is a trademark of Maxim Integrated Products, Inc.

AutoShutdown is a trademark of Maxim Integrated Products, Inc.

Features

- ◆ 6 x 5 Chip-Scale Package (UCSP) and WLP Package
- ◆ ESD Protection for RS-232 I/O Pins
 - ±15kV—IEC 1000-4-2 Air-Gap Discharge
 - ±8kV—IEC 1000-4-2 Contact Discharge
 - ±15kV—Human Body Model
- ◆ 1µA Low-Power AutoShutdown
- ◆ 250kbps Guaranteed Data Rate
- ◆ Meet EIA/TIA-232 Specifications Down to +3.1V
- ◆ RS-232 Compatible to +2.5V Allows Operation from Single Li+ Cell
- ◆ Small 0.1µF Capacitors
- ◆ Configurable Logic Levels


Ordering Information

| PART | TEMP RANGE | BUMP-PACKAGE |
|----------------|----------------|--------------|
| MAX3230EEBV-T | -40°C to +85°C | 6 x 5 UCSP |
| MAX3230AEWV+-T | -40°C to +85°C | 6 x 5 WLP |
| MAX3231EEBV-T | -40°C to +85°C | 6 x 5 UCSP |
| MAX3231AEWV+-T | -40°C to +85°C | 6 x 5 WLP |

+ Denotes a lead-free/RoHS-compliant package.

T = Tape-and-reel.

Typical Operating Circuits

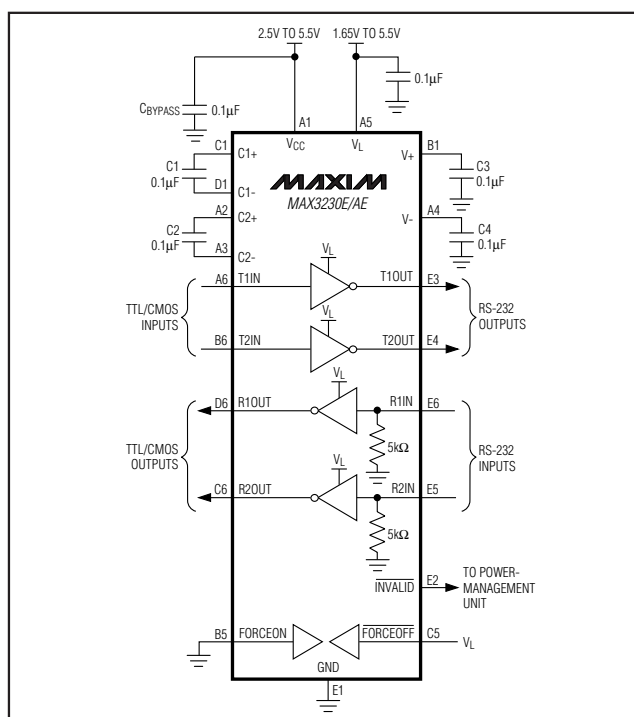

Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

ABSOLUTE MAXIMUM RATINGS

| | |
|--|-----------------------------------|
| V _{CC} to GND | -0.3V to +6.0V |
| V ₊ to GND | -0.3V to +7.0V |
| V ₋ to GND | +0.3V to -7.0V |
| V ₊ to IV-I (Note 1) | +13V |
| V _L to GND | -0.3V to +6.0V |
| Input Voltages | |
| T _{IN} , FORCEON, $\overline{\text{FORCEOFF}}$ to GND | -0.3V to (V _L + 0.3V) |
| R _{IN} to GND | ±25V |
| Output Voltages | |
| T _{OUT} to GND | ±13.2V |
| R _{OUT} INVALID to GND | -0.3V to (V _L + 0.3V) |
| INVALID to GND | -0.3V to (V _{CC} + 0.3V) |

| | |
|---|-----------------|
| Short-Circuit Duration T _{OUT} to GND | Continuous |
| Continuous Power Dissipation (T _A = +70°C) | |
| 6 × 5 UCSP (derate 10.1mW/°C above +70°C) | 805mW |
| 6 × 5 WLP (derate 20mW/°C above +70°C) | 1.6W |
| Operating Temperature Range | -40°C to +85°C |
| Junction Temperature | +150°C |
| Storage Temperature Range | -65°C to +150°C |
| Bump Temperature (soldering) | |
| Infrared (15s) | +200°C |
| Vapor Phase (20s) | +215°C |

Note 1: V₊ and V₋ can have maximum magnitudes of 7V, but their absolute difference cannot exceed 13V.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V_{CC} = +2.5V to +5.5V, V_L = +1.65V to +5.5V, C₁–C₄ = 0.1μF, tested at +3.3V ±10%, T_A = T_{MIN} to T_{MAX}. Typical values are at T_A = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|---|----------------------------------|---|-----------------------|-----------------------|-----|-------|
| DC CHARACTERISTICS | | | | | | |
| V _L Input Voltage Range | V _L | | 1.65 | V _{CC} + 0.3 | | V |
| V _{CC} Supply Current, AutoShutdown | I _{CC} | FORCEON = GND $\overline{\text{FORCEOFF}}$ = V _L , all R _{IN} open | | | 10 | μA |
| | | $\overline{\text{FORCEOFF}}$ = GND | | | 10 | μA |
| | | FORCEON, $\overline{\text{FORCEOFF}}$ = V _L | | | 1 | mA |
| V _{CC} Supply Current, AutoShutdown Disabled | I _{CC} | FORCEON = $\overline{\text{FORCEOFF}}$ = V _L , no load | | 0.3 | 1 | mA |
| V _L Supply Current | T _{IN} , I _L | FORCEON or $\overline{\text{FORCEOFF}}$ = GND or V _L , V _{CC} = V _L = +5V, no receivers switching | | 1 | | μA |
| LOGIC INPUTS | | | | | | |
| Input-Logic Low | | T _{IN} , FORCEON, $\overline{\text{FORCEOFF}}$ | | | 0.4 | V |
| Input-Logic High | | T _{IN} , FORCEON, $\overline{\text{FORCEOFF}}$ | 0.66 × V _L | | | V |
| Transmitter Input Hysteresis | | | | 0.5 | | V |
| Input Leakage Current | | T _{IN} , FORCEON, $\overline{\text{FORCEOFF}}$ | ±0.01 | | ±1 | μA |
| RECEIVER OUTPUTS | | | | | | |
| Output Leakage Currents | | R _{OUT} , receivers disabled, $\overline{\text{FORCEOFF}}$ = GND or in AutoShutdown | | | ±10 | μA |
| Output-Voltage Low | | I _{OUT} = 0.8mA | | | 0.4 | V |
| Output-Voltage High | | I _{OUT} = -0.5mA | V _L - 0.4 | V _L - 0.1 | | V |

±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

ELECTRICAL CHARACTERISTICS (continued)

(V_{CC} = +2.5V to +5.5V, V_L = +1.65V to +5.5V, C1–C4 = 0.1μF, tested at +3.3V ±10%, T_A = T_{MIN} to T_{MAX}. Typical values are at T_A = +25°C, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | | MIN | TYP | MAX | UNITS |
|--|-------------------|---|---|-----------------------|-----------------------|-----|-------|
| RECEIVER INPUTS | | | | | | | |
| Input Voltage Range | | | | -25 | +25 | | V |
| Input-Threshold Low | | T _A = +25°C | V _{CC} = +3.3V | 0.6 | 1.2 | | V |
| | | | V _{CC} = +5.0V | 0.8 | 1.7 | | |
| Input-Threshold High | | T _A = +25°C | V _{CC} = +3.3V | 1.3 | | 2.4 | V |
| | | | V _{CC} = +5.0V | 1.8 | | 2.4 | |
| Input Hysteresis | | | | 0.5 | | | V |
| Input Resistance | | | | 3 | 5 | 7 | kΩ |
| AUTOMATIC SHUTDOWN | | | | | | | |
| Receiver Input Threshold to <u>INVALID</u> Output High | | Figure 3a | Positive threshold | 2.7 | | | V |
| | | | Negative threshold | -2.7 | | | |
| Receiver Input Threshold to <u>INVALID</u> Output Low | | | | -0.3 | +0.3 | | V |
| Receiver Positive or Negative Threshold to <u>INVALID</u> High | t _{INVH} | V _{CC} = +5.0V, Figure 3b | | 1 | | | μs |
| Receiver Positive or Negative Threshold to <u>INVALID</u> Low | t _{INVL} | V _{CC} = +5.0V, Figure 3b | | 30 | | | μs |
| Receiver Edge to Transmitters Enabled | t _{WU} | V _{CC} = +5.0V, Figure 3b | | 100 | | | μs |
| INVALID OUTPUT | | | | | | | |
| Output-Voltage Low | | I _{OUT} = 0.8mA | | 0.4 | | | V |
| Output-Voltage High | | I _{OUT} = -0.5mA | | V _{CC} - 0.4 | V _{CC} - 0.1 | | V |
| TRANSMITTER OUTPUTS | | | | | | | |
| V _{CC} Mode Switch Point (V _{CC} Falling) | | T _{OUT} = ±5.0V to ±3.7V | | 2.85 | 3.10 | | V |
| V _{CC} Mode Switch Point (V _{CC} Rising) | | T _{OUT} = ±3.7V to ±5.0V | | 3.3 | 3.7 | | V |
| V _{CC} Mode Switch-Point Hysteresis | | | | 400 | | | mV |
| Output Voltage Swing | | All transmitter outputs loaded with 3kΩ to ground | V _{CC} = +3.1V to +5.5V, V _{CC} falling, T _A = +25°C | ±5 | ±5.4 | | V |
| | | | V _{CC} = +2.5V to +3.1V, V _{CC} rising | ±3.7 | | | |
| Output Resistance | | V _{CC} = V ₊ = V ₋ = 0, T _{OUT} = ±2V | | 300 | 10M | | Ω |
| Output Short-Circuit Current | | | | ±60 | | | mA |
| Output Leakage Current | | T _{OUT} = ±12V, transmitters disabled | | ±25 | | | μA |
| ESD PROTECTION | | | | | | | |
| R _{IN} , T _{OUT} | | Human Body Model | | ±15 | | | kV |
| | | IEC 1000-4-2 Air-Gap Discharge | | ±15 | | | |
| | | IEC 1000-4-2 Contact Discharge | | ±8 | | | |

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

TIMING CHARACTERISTICS




($V_{CC} = +2.5V$ to $+5.5V$, $V_L = +1.65V$ to $+5.5V$, C_1 – $C_4 = 0.1\mu F$, tested at $+3.3V \pm 10\%$, $T_A = T_{MIN}$ to T_{MAX} . Typical values are at $T_A = +25^\circ C$, unless otherwise noted.) (Note 2)

| PARAMETER | SYMBOL | CONDITIONS | MIN | TYP | MAX | UNITS |
|------------------------------|-----------------------|--|-----|------|-----|-----------|
| Maximum Data Rate | | $R_L = 3k\Omega$, $C_L = 1000pF$, one transmitter switching | 250 | | | kbps |
| Receiver Propagation Delay | | Receiver input to receiver output, $C_L = 150pF$ | | 0.15 | | μs |
| Receiver-Output Enable Time | | $V_{CC} = V_L = +5V$ | | 200 | | ns |
| Receiver-Output Disable Time | | $V_{CC} = V_L = +5V$ | | 200 | | ns |
| Transmitter Skew | $ t_{PHL} - t_{PLH} $ | | | 100 | | ns |
| Receiver Skew | $ t_{PHL} - t_{PLH} $ | | | 50 | | ns |
| Transition-Region Slew Rate | | $R_L = 3k\Omega$ to $7k\Omega$, $C_L = 150pF$ to $1000pF$, $T_A = +25^\circ C$ | 6 | | 30 | $V/\mu s$ |

Note 2: V_{CC} must be greater than V_L .




Typical Operating Characteristics

($V_{CC} = +3.3V$, 250kbps data rate, $0.1\mu F$ capacitors, all transmitters loaded with $3k\Omega$ and C_L , $T_A = +25^\circ C$, unless otherwise noted.)

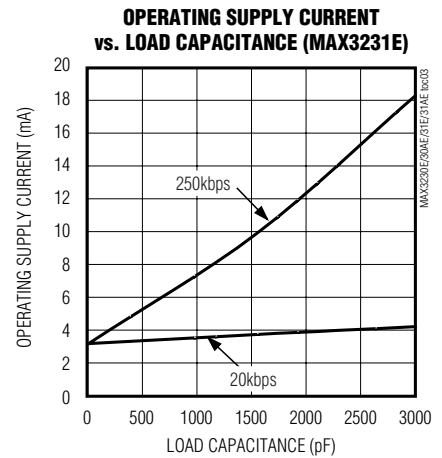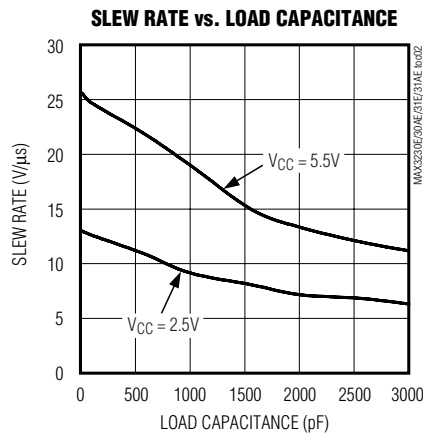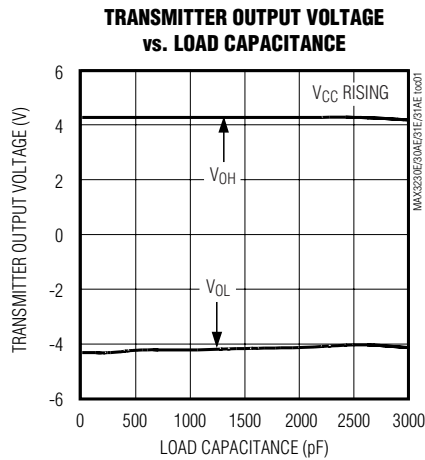

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

(V_{CC} = +3.3V, 250kbps data rate, 0.1μF capacitors, all transmitters loaded with 3kΩ and C_L, T_A = +25°C, unless otherwise noted.)

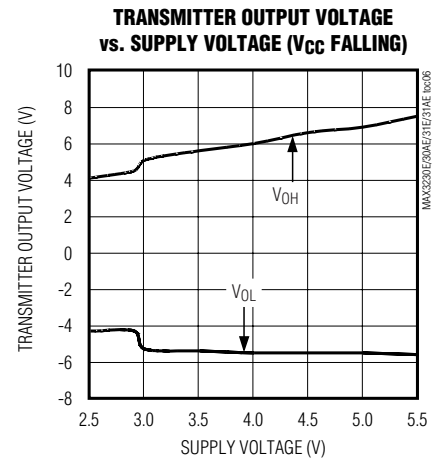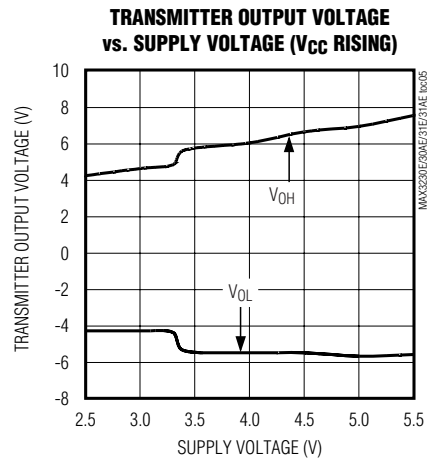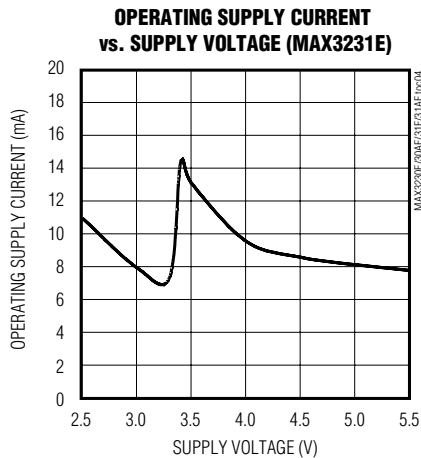

Pin Description

| BUMP | | NAME | FUNCTION |
|-------------------------------------|-------------------------------------|------------------------------|---|
| MAX3230E/ MAX3230AE | MAX3231E/ MAX3231AE | | |
| A1 | A1 | VCC | Supply Voltage. +2.5V to +5.5V supply voltage. |
| A2 | A2 | C2+ | Inverting Charge-Pump Capacitor Positive Terminal |
| A3 | A3 | C2- | Inverting Charge-Pump Capacitor Negative Terminal |
| A4 | A4 | V- | Negative Charge-Pump Output. -5.5V/-4.0V generated by charge pump. |
| A5 | A5 | V _L | Logic Voltage Input. Logic-level input for receiver outputs and transmitter inputs. Connect V _L to the system-logic supply voltage or VCC if no logic supply is required. |
| A6, B6 | A6 | T_IN | Transmitter Input(s) |
| B1 | B1 | V+ | Positive Charge-Pump Output. +5.5V/+4.0V generated by charge pump. If charge pump is generating +4.0V, the device has switched from RS-232-compliant to RS-232-compatible mode. |
| B2, B3, B4, C2, C3, C4, D2–D5 | B2, B3, B4, C2, C3, C4, D2–D5 | N.C. | No Connection. The MAX3230E/MAX3231E are not populated with solder bumps at these locations. The MAX3230AE/MAX3231AE are populated with electrically isolated solder bumps at these locations. |
| B5 | B5 | FORCEON | Active High FORCEON Input. Drive FORCEON high to override automatic circuitry, keeping transmitters and charge pumps on. |
| C1 | C1 | C1+ | Positive Regulated Charge-Pump Capacitor Positive Terminal |
| C5 | C5 | $\overline{\text{FORCEOFF}}$ | Active-Low $\overline{\text{FORCEOFF}}$ Input. Drive $\overline{\text{FORCEOFF}}$ low to shut down transmitters, receivers, and on-board charge pump. This overrides all automatic circuitry and FORCEON. |

±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

Pin Description (continued)

| BUMP | | NAME | FUNCTION |
|------------------------|------------------------|-----------------------------|--|
| MAX3230E/ MAX3230AE | MAX3231E/ MAX3231AE | | |
| C6, D6 | C6 | R_OUT | Receiver Output(s) |
| D1 | D1 | C1- | Positive Regulated Charge-Pump Capacitor Negative Terminal |
| E1 | E1 | GND | Ground |
| E2 | E2 | $\overline{\text{INVALID}}$ | Valid Signal-Detector Output. Output $\overline{\text{INVALID}}$ is enabled low if no valid RS-232 level is present on any receiver input. |
| E3, E4 | E3 | T_OUT | RS-232 Transmitter Output(s) |
| E5, E6 | E5 | R_IN | RS-232 Receiver Input(s) |
| — | B6, D6, E4, E6 | N.C. | No Connection. These locations are populated with solder bumps, but are electrically isolated. |

Detailed Description

Dual Mode™ Regulated Charge-Pump Voltage Converter

The MAX3230E/AE and MAX3231E/AE internal power supply consists of a dual-mode regulated charge pump. For supply voltages above +3.7V, the charge pump generates +5.5V at V+ and -5.5V at V-. The charge pumps operate in a discontinuous mode. If the output voltages are less than ±5.5V, the charge pumps are enabled. If the output voltages exceed ±5.5V, the charge pumps are disabled.

For supply voltages below +2.85V, the charge pump generates +4.0V at V+ and -4.0V at V-. The charge pumps operate in a discontinuous mode. If the output voltages are less than ±4.0V, the charge pumps are enabled. If the output voltages exceed ±4.0V, the charge pumps are disabled.

Each charge pump requires a flying capacitor (C1, C2) and a reservoir capacitor (C3, C4) to generate the V+ and V- supply voltages.

Voltage Generation in the Switchover Region

The MAX3230E/AE and MAX3231E/AE include a switchover circuit between these two modes that have approximately 400mV of hysteresis around the switchover point. The hysteresis is shown in Figure 1. This large hysteresis eliminates mode changes due to power-supply bounce.

For example, a three-cell NiMh battery system starts at VCC = +3.6V, and the charge pump generates an output voltage of ±5.5V. As the battery discharges, the MAX3230E/AE and MAX3231E/AE maintain the outputs

Dual Mode is a trademark of Maxim Integrated Products, Inc.

in regulation until the battery voltage drops below +3.1V. The output regulation points then change to ±4.0V.

When VCC is rising, the charge pump generates an output voltage of ±4.0V, while VCC is between +2.5V and +3.5V. When VCC rises above the switchover voltage of +3.5V, the charge pump switches modes to generate an output of ±5.5V.

Table 1 shows different supply schemes and their operating voltage ranges.

RS-232 Transmitters

The transmitters are inverting level translators that convert CMOS logic levels to RS-232 levels. The MAX3230E/AE and MAX3231E/AE automatically reduce the RS-232-compliant levels (±5.5V) to RS-232-compatible levels (±4.0V) when VCC falls below approximately +3.1V. The reduced levels also reduce supply-current requirements, extending battery life. Built-in hysteresis of approximately 400mV for VCC ensures that the RS-

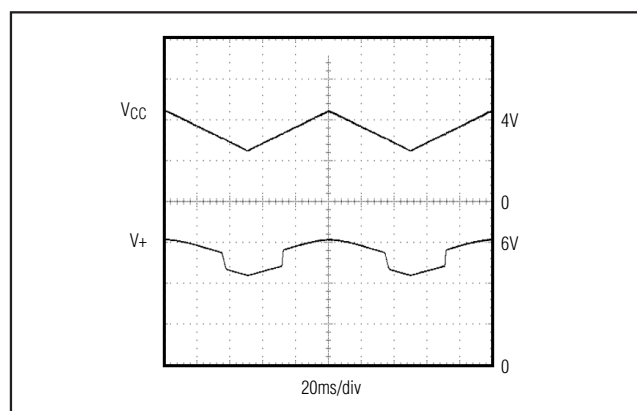


Figure 1. V+ Switchover for Changing VCC

±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

Table 1. Operating Supply Options

| SYSTEM SUPPLY (V) | V _{CC} (V) | V _L (V) | RS-232 MODE |
|---|---------------------|--------------------------|----------------------|
| 1 Li+ Cell | +2.4 to +4.2 | Regulated system voltage | Compliant/Compatible |
| 3 NiCad/NiMh Cells | +2.4 to +3.8 | Regulated system voltage | Compliant/Compatible |
| Regulated Voltage Only (V _{CC} falling) | +3.0 to +5.5 | +3.0 to +5.5 | Compliant |
| Regulated Voltage Only (V _{CC} falling) | +2.5 to +3.0 | +2.5 to +3.0 | Compatible |

Table 2. Output Control Truth Table

| TRANSCIEVER STATUS | FORCEON | FORCEOFF | RECEIVER STATUS | INVALID |
|---------------------------------|---------|----------|-----------------|---------|
| Shutdown (AutoShutdown) | Low | High | High impedance | Low |
| Shutdown (Forced Off) | X | Low | High impedance | † |
| Normal Operation (Forced On) | High | High | Active | † |
| Normal Operation (AutoShutdown) | Low | High | Active | High |

X = Don't care.

† = $\overline{\text{INVALID}}$ output state is determined by R_{IN} input levels.

232 output levels do not change if V_{CC} is noisy or has a sudden current draw causing the supply voltage to drop slightly. The outputs return to RS-232-compliant levels (±5.5V) when V_{CC} rises above approximately +3.5V.

The MAX3230E/AE and MAX3231E/AE transmitters guarantee a 250kbps data rate with worst-case loads of 3kΩ in parallel with 1000pF.

When $\overline{\text{FORCEOFF}}$ is driven to ground, the transmitters and receivers are disabled and the outputs become high impedance. When the AutoShutdown circuitry senses that all receiver and transmitter inputs are inactive for more than 30μs, the transmitters are disabled and the outputs go to a high-impedance state. When the power is off, the MAX3230E/AE and MAX3231E/AE permit the transmitter outputs to be driven up to ±12V.

The transmitter inputs do not have pullup resistors. Connect unused inputs to GND or V_L.

RS-232 Receivers

The MAX3230E/AE and MAX3231E/AE receivers convert RS-232 signals to logic-output levels. All receivers have inverting tri-state outputs and can be active or inactive. In shutdown ($\overline{\text{FORCEOFF}}$ = low) or in AutoShutdown, the MAX3230E/AE and MAX3231E/AE receivers are in a high-impedance state (Table 2).

The MAX3230E/AE and MAX3231E/AE feature an $\overline{\text{INVALID}}$ output that is enabled low when no valid RS-232

signal levels have been detected on any receiver inputs. $\overline{\text{INVALID}}$ is functional in any mode (Figures 2 and 3).

AutoShutdown

The MAX3230E/AE and MAX3231E/AE achieve a 1μA supply current with Maxim's AutoShutdown feature, which operates when FORCEON is low and $\overline{\text{FORCEOFF}}$ is high. When these devices sense no valid signal levels on all receiver inputs for 30μs, the on-board charge pump and drivers are shut off, reducing V_{CC} supply current to 1μA. This occurs if the RS-232 cable is disconnected or the connected peripheral transmitters are turned off. The device turns on again when a valid level is applied to any RS-232 receiver input. As a result, the system saves power without changes to the existing BIOS or operating system.

Table 2 and Figure 2c summarize the MAX3230E/AE and MAX3231E/AE operating modes. FORCEON and $\overline{\text{FORCEOFF}}$ override AutoShutdown. When neither control is asserted, the IC selects between these states automatically, based on receiver input levels. Figures 2a, 2b, and 3a depict valid and invalid RS-232-receiver levels. Figures 3a and 3b show the input levels and timing diagram for AutoShutdown operation.

A system with AutoShutdown can require time to wake up. Figure 4 shows a circuit that forces the transmitters on for 100ms, allowing enough time for the other system to realize that the MAX3230E/AE and

±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

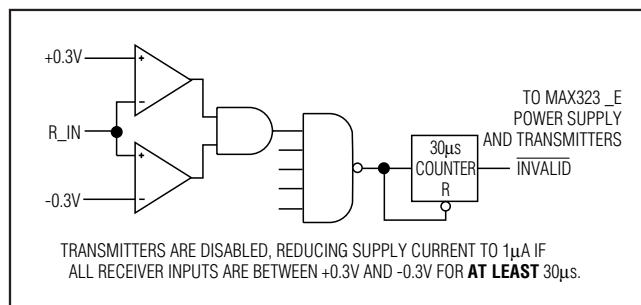


Figure 2a. MAX323_E Entering 1µA Supply Mode with AutoShutdown

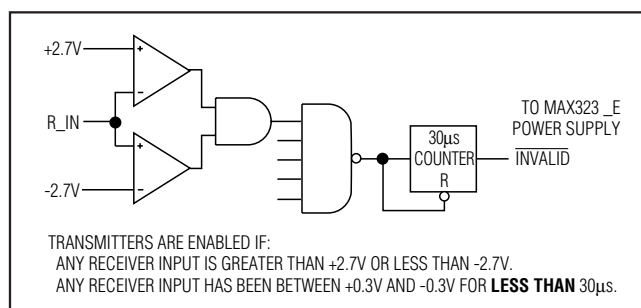


Figure 2b. MAX323_E with Transmitters Enabled Using AutoShutdown

MAX3231E/AE are active. If the other system transmits valid RS-232 signals within that time, the RS-232 ports on both systems remain enabled.

When shut down, the device's charge pumps are off, V+ is pulled to VCC, V- is pulled to ground, and the transmitter outputs are high impedance. The time required to exit shutdown is typically 100µs (Figure 3b).

V_L Logic Supply Input

Unlike other RS-232 interface devices, where the receiver outputs swing between 0 and VCC, the MAX3230E/AE and MAX3231E/AE feature a separate logic supply input (V_L) that sets V_{OH} for the receiver outputs. The transmitter inputs (T_IN), FORCEON, and FORCEOFF, are also referred to V_L. This feature allows maximum flexibility in interfacing to different systems and logic levels. Connect V_L to the system's logic supply voltage (+1.65V to +5.5V), and bypass it with a 0.1µF capacitor to GND. If the logic supply is the same as VCC, connect V_L to VCC. Always enable VCC before enabling the V_L supply. VCC must be greater than or equal to the V_L supply.

Software-Controlled Shutdown

If direct software control is desired, connect FORCEOFF and FORCEON together to disable AutoShutdown. The

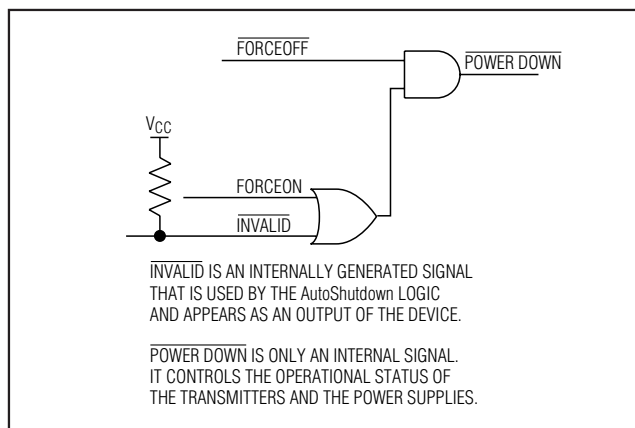


Figure 2c. MAX323_E AutoShutdown Logic

microcontroller (µC) then drives FORCEOFF and FORCEON like a SHDN input. INVALID can be used to alert the µC to indicate serial data activity.

±15kV ESD Protection

As with all Maxim devices, ESD-protection structures are incorporated on all pins to protect against electrostatic discharges encountered during handling and assembly. The driver outputs and receiver inputs of the MAX3230E/AE and MAX3231E/AE have extra protection against static electricity. Maxim's engineers have developed state-of-the-art structures to protect these pins against ESD of ±15kV without damage. The ESD structures withstand high ESD in all states: normal operation, shutdown, and power-down. After an ESD event, Maxim's E-versions keep working without latchup, whereas competing RS-232 products can latch and must be powered down to remove latchup.

ESD protection can be tested in various ways; the transmitter outputs and receiver inputs of this product family are characterized for protection to the following limits:

- 1) ±15kV using the Human Body Model
- 2) ±8kV using the Contact Discharge method specified in IEC 1000-4-2
- 3) ±15kV using the IEC 1000-4-2 Air-Gap method

ESD Test Conditions

ESD performance depends on a variety of conditions. Contact Maxim for a reliability report that documents test setup, test methodology, and test results.

Human Body Model

Figure 5a shows the Human Body Model. Figure 5b shows the current waveform it generates when discharged into a low impedance. This model consists of a 100pF capacitor charged to the ESD voltage of interest,

±15kV ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

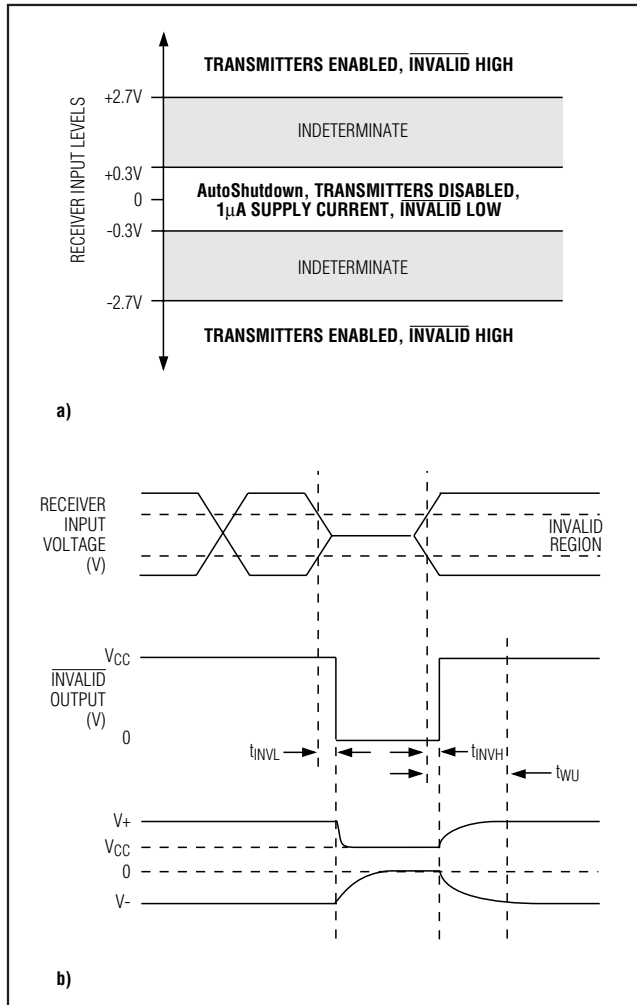


Figure 3. AutoShutdown Trip Levels

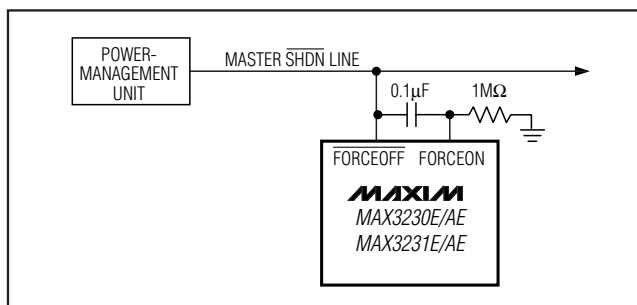


Figure 4. AutoShutdown with Initial Turn-On to Wake Up a Mouse or Another System

which is then discharged into the test device through a 1.5kΩ resistor.

IEC 1000-4-2

The IEC 1000-4-2 standard covers ESD testing and performance of finished equipment. It does not specifically refer to ICs. The MAX3230E/AE and MAX3231E/AE aid in designing equipment that meets Level 4 (the highest level) of IEC 1000-4-2, without the need for additional ESD-protection components.

The major difference between tests done using the Human Body Model and IEC 1000-4-2 is a higher peak current in IEC 1000-4-2, because series resistance is lower in the IEC 1000-4-2 model. Hence, the ESD withstands voltage measured to IEC 1000-4-2 and is generally lower than that measured using the Human Body Model. Figure 6a shows the IEC 1000-4-2 model, and Figure 6b shows the current waveform for the ±8kV IEC 1000-4-2 Level 4 ESD Contact Discharge test.

The Air-Gap test involves approaching the device with a charged probe. The Contact Discharge method connects the probe to the device before the probe is energized.

Machine Model

The Machine Model for ESD tests all pins using a 200pF storage capacitor and zero discharge resistance. Its objective is to emulate the stress caused by contact that occurs with handling and assembly during manufacturing. Of course, all pins require this protection during manufacturing, not just RS-232 inputs and outputs. Therefore, after PC board assembly, the Machine Model is less relevant to I/O ports.

Applications Information

Capacitor Selection

The capacitor type used for C1–C4 is not critical for proper operation; either polarized or nonpolarized capacitors can be used. However, ceramic chip capacitors with an X7R or X5R dielectric work best. The charge pump requires 0.1µF capacitors for 3.3V operation. For other supply voltages, see Table 3 for required capacitor values. Do not use values smaller than those listed in Table 3. Increasing the capacitor values (e.g., by a factor of 2) reduces ripple on the transmitter outputs and slightly reduces power consumption. C2, C3, and C4 can be increased without changing the value of C1.

Caution: Do not increase C1 without also increasing the values of C2, C3, and C4 to maintain the proper ratios (C1 to the other capacitors).

When using the minimum required capacitor values, make sure the capacitor value does not degrade excessively with temperature. If in doubt, use capacitors with

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

$\pm 15\text{kV}$ ESD-Protected $+2.5\text{V}$ to $+5.5\text{V}$ RS-232 Transceivers in UCSP and WLP

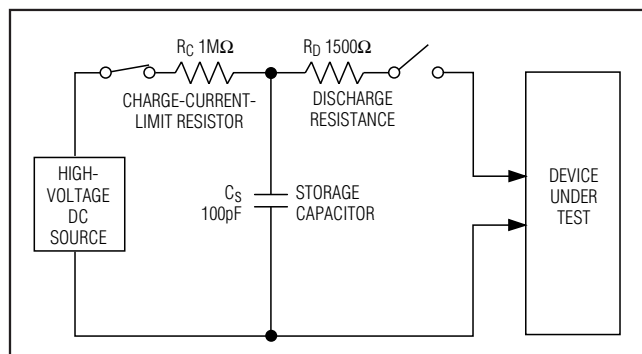


Figure 5a. Human Body ESD Test Models

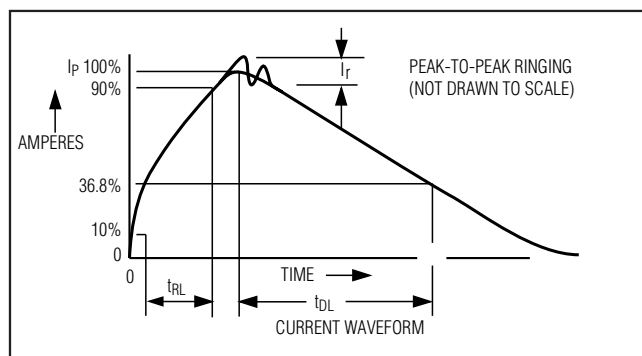


Figure 5b. Human Body Model Current Waveform

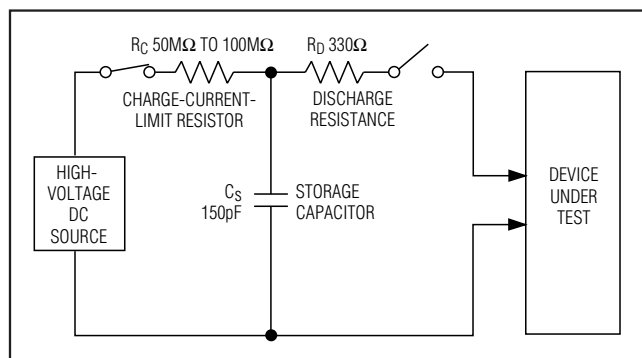


Figure 6a. IEC 1000-4-2 ESD Test Model

a larger nominal value. The capacitor's equivalent series resistance (ESR) usually rises at low temperatures and influences the amount of ripple on V_+ and V_- .

Power-Supply Decoupling

In most circumstances, a $0.1\mu\text{F}$ V_{CC} bypass capacitor is adequate. In applications that are sensitive to power-

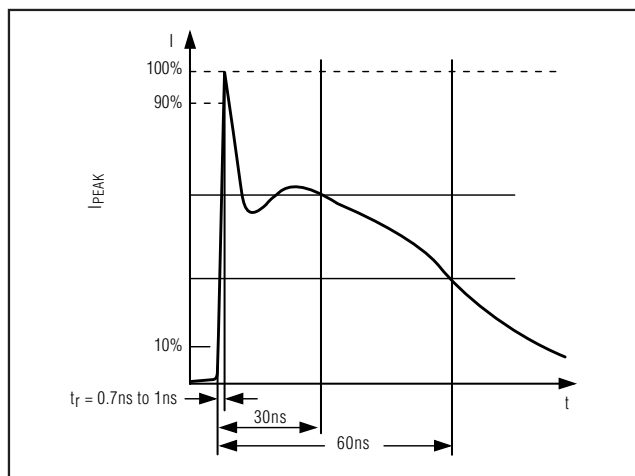


Figure 6b. IEC 1000-4-2 ESD Generator Current Waveform

Table 3. Required Capacitor Values

| V_{CC} (V) | $C1, C_{BYPASS}$ (μF) | $C2, C3, C4$ (μF) |
|--------------|------------------------------------|--------------------------------|
| 2.5 to 3.0 | 0.22 | 0.22 |
| 3.0 to 3.6 | 0.1 | 0.1 |
| 4.5 to 5.5 | 0.047 | 0.33 |
| 3.0 to 5.5 | 0.22 | 1 |

supply noise, use a capacitor of the same value as the charge-pump capacitor $C1$. Connect bypass capacitors as close to the IC as possible.

Transmitter Outputs when Exiting Shutdown

Figure 7 shows a transmitter output when exiting shutdown mode. The transmitter is loaded with $3\text{k}\Omega$ in parallel with 1000pF . The transmitter output displays no ringing or undesirable transients as it comes out of shutdown, and is enabled only when the magnitude of V_- exceeds approximately -3V .

High Data Rates

The MAX3230E/AE and MAX3231E/AE maintain the RS-232 $\pm 5.0\text{V}$ minimum transmitter output voltage even at high data rates. Figure 8 shows a transmitter loopback test circuit. Figure 9 shows a loopback test result at 120kbps , and Figure 10 shows the same test at 250kbps . For Figure 9, the transmitter was driven at 120kbps into an RS-232 load in parallel with 1000pF . For Figure 10, a single transmitter was driven at 250kbps and loaded with an RS-232 receiver in parallel with 1000pF .

$\pm 15\text{kV}$ ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

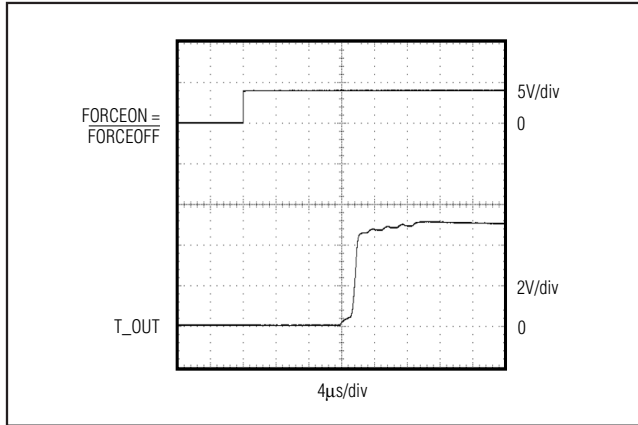


Figure 7. Transmitter Outputs Exiting Shutdown or Powering Up

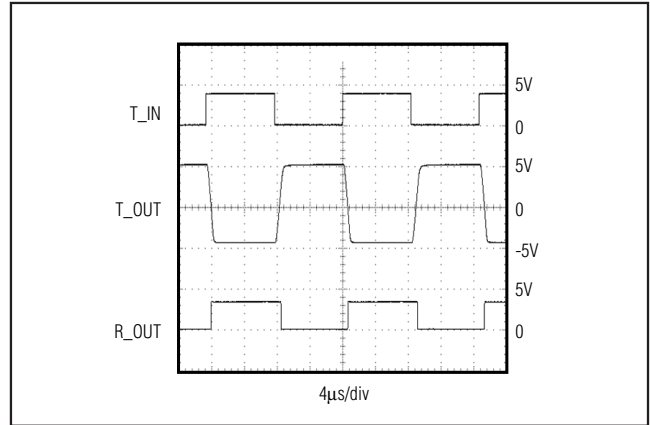


Figure 9. Loopback Test Result at 120kbps

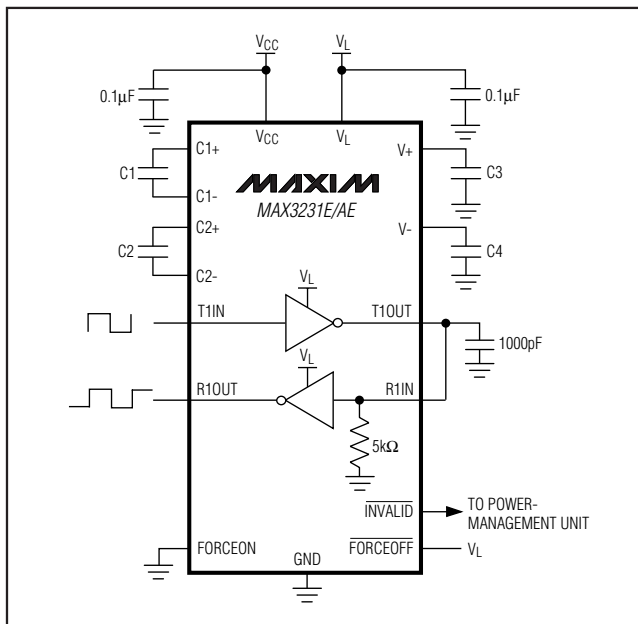


Figure 8. Transmitter Loopback Test Circuit

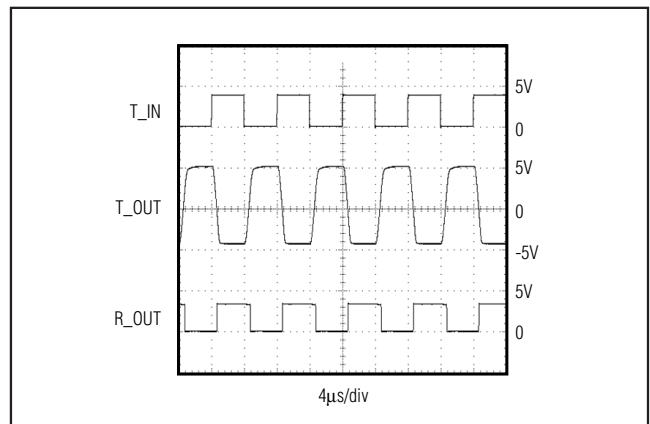


Figure 10. Loopback Test Result at 250kbps

UCSP Applications Information

For the latest application details on UCSP construction, dimensions, tape carrier information, PC board techniques, bump-pad layout, and recommended reflow temperature profile, as well as the latest information on reliability testing results, refer to the Application Note UCSP—A Wafer-Level Chip-Scale Package available on Maxim's website at www.maxim-ic.com/ucsp.


Chip Information

TRANSISTOR COUNT: 698
PROCESS: CMOS

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

$\pm 15\text{kV}$ ESD-Protected $+2.5\text{V}$ to $+5.5\text{V}$ RS-232 Transceivers in UCSP and WLP

Typical Operating Circuits (continued)

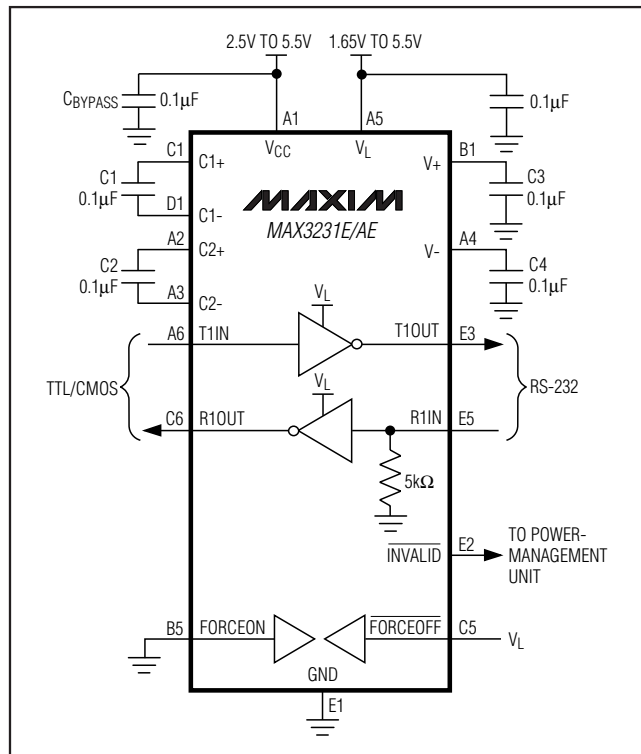


$\pm 15\text{kV}$ ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

Pin Configurations

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

TOP VIEW

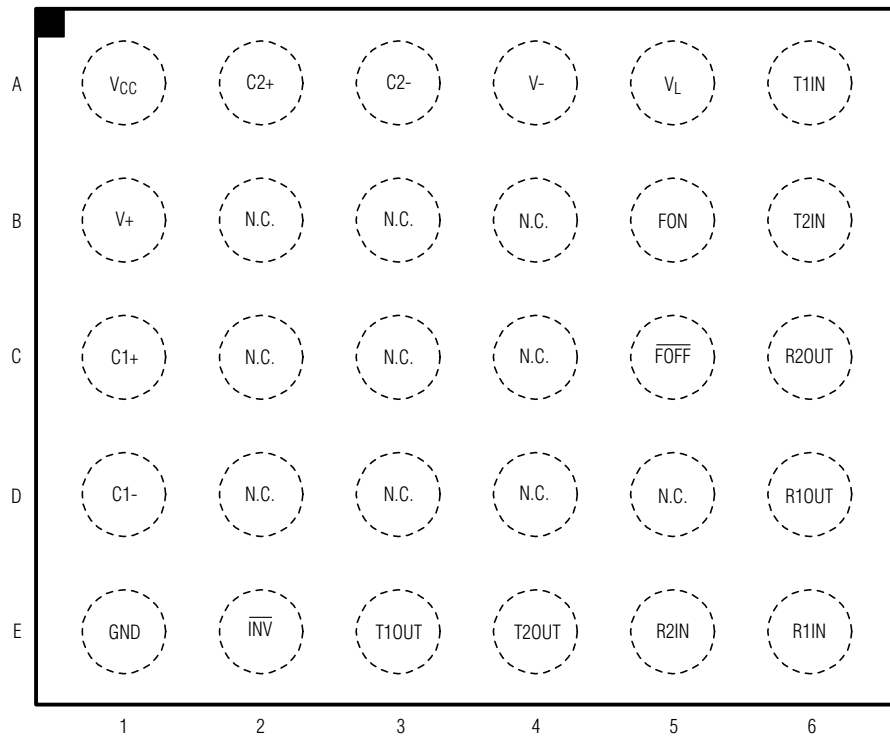


MAXIM
MAX3230E/AE

FON = FORCEON
FFFF = FORCEOFF
INV = INVALID

$\pm 15\text{kV}$ ESD-Protected $+2.5\text{V}$ to $+5.5\text{V}$ RS-232 Transceivers in UCSP and WLP

Pin Configurations (continued)

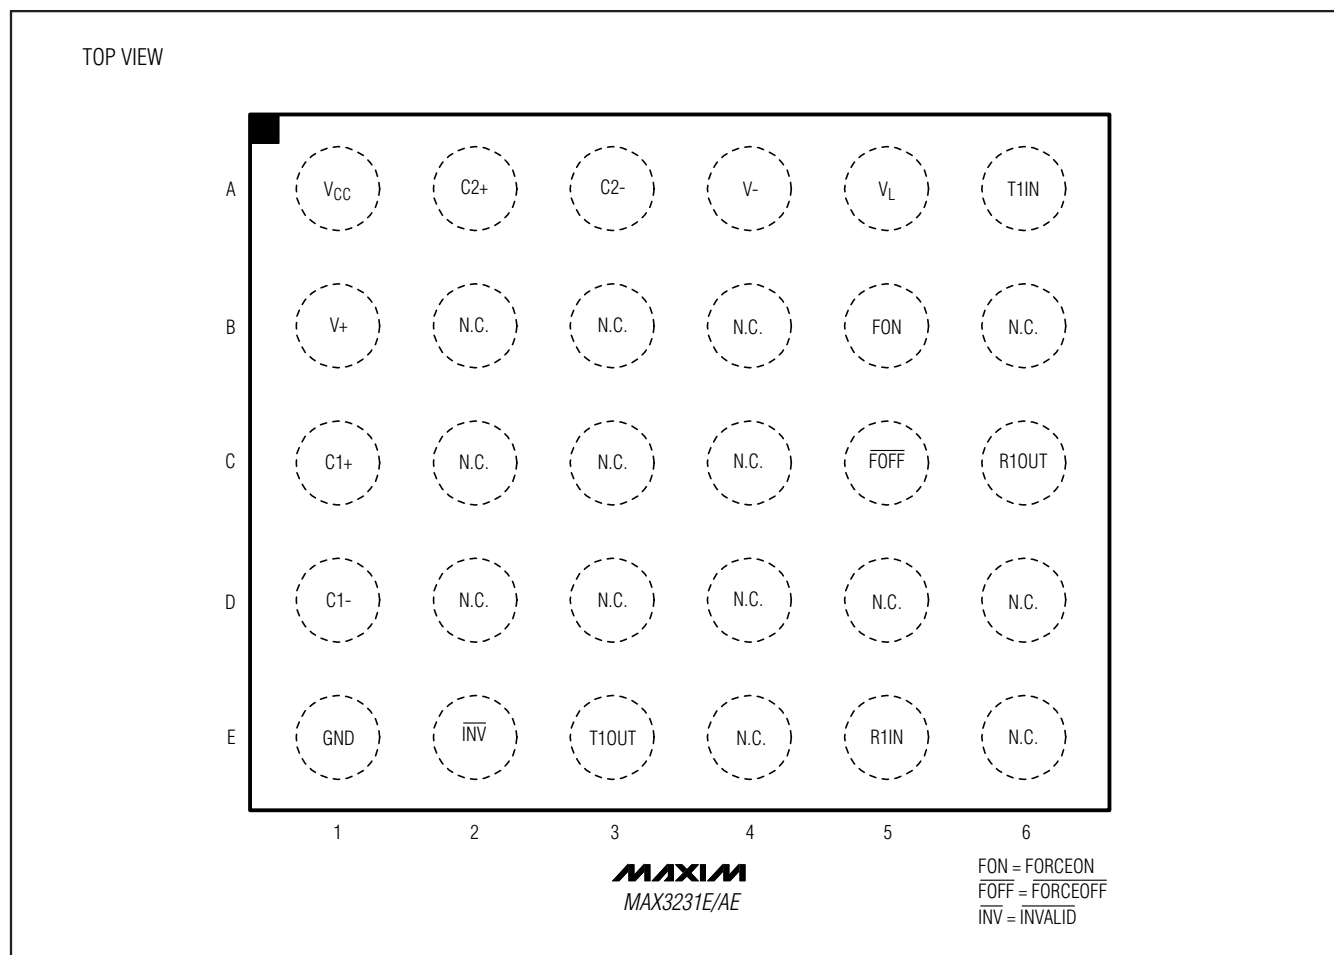

$\pm 15\text{kV}$ ESD-Protected +2.5V to +5.5V RS-232 Transceivers in UCSP and WLP

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages.

| PACKAGE TYPE | PACKAGE CODE | DOCUMENT NO. |
|--------------|--------------|-------------------------|
| 6 x 5 UCSP | B30-3 | 21-0123 |
| 6 x 5 WLP | W302A3-2 | 21-0016 |

MAX3230E/MAX3230AE/MAX3231E/MAX3231AE

$\pm 15\text{kV}$ ESD-Protected $+2.5\text{V}$ to $+5.5\text{V}$ RS-232 Transceivers in UCSP and WLP

Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION | PAGES CHANGED |
|--------------------|------------------|---|------------------|
| 0 | 5/04 | Initial release | — |
| 1 | 10/08 | Addition of lead-free and WLP packaging | 1, 5, 6, 7, 15 |

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

16 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2008 Maxim Integrated Products

MAXIM is a registered trademark of Maxim Integrated Products, Inc.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Maxim Integrated:

[MAX3230EEBV-T](#) [MAX3231AEEWV+T](#) [MAX3231EEBV-T](#) [MAX3230AEEWV+T](#) [MAX3226EAAE+T](#)