

#### **Features**

- Lead Free Finish/RoHS Compliant (Note1) ("P"Suffix Designates Compliant. See Ordering Information)
- Epoxy Meets UL 94 V-0 Flammability Rating
- Low Leakage And Low Power Loss
- Super Fast Switching Speed And High Current Capability
- Halogen Free Available Upon Request By Adding Suffix "-HF"

# **Maximum Ratings**

- Operating Junction Temperature Range: -65°C to +150°C
- Storage Temperature Range: -65°C to +150°C
- Typical Thermal Resistance: 20°C/W Junction to Ambient


MCC Part Number	Device Marking	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
SF51G	SF51GP	50V	35V	50V
SF52G	SF52GP	100V	70V	100V
SF54G	SF54GP	200V	140V	200V
SF55G	SF55GP	300V	210V	300V
SF56G	SF56GP	400V	280V	400V
SF58G	SF58GP	600V	420V	600V

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	I <sub>F(AV)</sub>	5.0A	T <sub>A</sub> =55°C
Peak Forward Surge Current	I <sub>FSM</sub>	150A	8.3ms,Half Sine
Maximum Instantaneous Forward Voltage SF51G-SF54G SF55G-SF56G SF58G	V <sub>F</sub>	0.95V 1.27V 1.75V	I <sub>FM</sub> =5.0A; T <sub>J</sub> =25°C
Maximum DC Reverse Current At Rated DC Blocking Voltage	I <sub>R</sub>	5.0μA 150μA	T <sub>J</sub> =25°C; T <sub>J</sub> =125°C
Maximum Reverse Recovery Time	t <sub>rr</sub>	35ns	I <sub>F</sub> =0.5A; I <sub>R</sub> =1.0A; Irr=0.25A
Typical Junction Capacitance SF51G-SF54G SF55G-SF58G	Сл	50pF 30pF	Measured at 1.0MHz, V <sub>R</sub> =4.0V

Note: 1. High Temperature Solder Exemption Applied, See EU Directive Annex 7a.

# 5 Amp High Efficiency Glass Passivated Rectifier 50 to 600 Volts

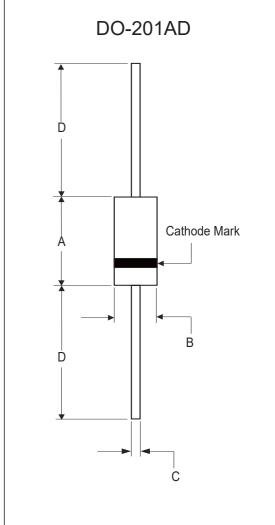

DIMENSIONS						
DIM	INCHES		MM		NOTE	
	MIN	MAX	MIN	MAX	NOTE	
Α	0.287	0.374	7.30	9.50		
В	0.189	0.208	4.80	5.30		
С	0.048	0.052	1.20	1.30		
D	1.000		25.40			



## **Curve Characteristics**

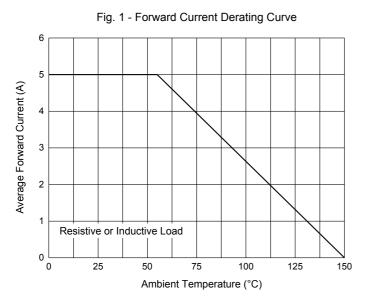


Fig. 3 - Typical Instantaneous Forward Characteristics


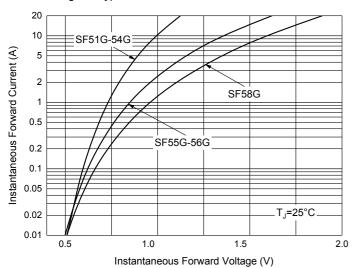


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge
Current

175
150
150
100
100
25
8.3 ms Single Half Sine-Wave
0
1 10 100
Number of Cycles at 60 Hz

Fig. 4 - Typical Reverse Leakage Characteristics



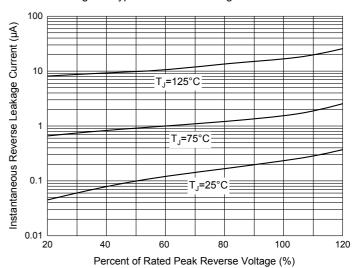

## **Ordering Information**

Device	Packing	
Part Number-TP	Tape&Reel: 1.2Kpcs/Reel	
Part Number-AP	Ammo Packing: 1.2Kpcs/Ammo Box	
Part Number-BP	Bulk:500pcs/Box,12Kpcs/Carton	

Note: Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

#### \*\*\*IMPORTANT NOTICE\*\*\*

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. **Micro Commercial Components Corp.** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp.** and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at

https://www.mccsemi.com/Home/TermsAndConditions.

### \*\*\*LIFE SUPPORT\*\*\*

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

#### \*\*\*CUSTOMER AWARENESS\*\*\*

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Micro Commercial Components (MCC):

<u>SF54G-TP</u> <u>SF56G-TP</u> <u>SF58G-TP</u> <u>SF54G-AP</u> <u>SF54G-AP</u> <u>SF56G-AP</u> <u>SF56G-BP</u> <u>SF58G-AP</u> <u>SF58G-BP</u> <u>SF58G-BP</u>