

Features

- Halogen Free Available Upon Request By Adding Suffix "-HF"
- Epoxy Meets UL 94 V-0 Flammability Rating
- Lead Free Finish/RoHS Compliant (Note 1)("P" Suffix Designates RoHS Compliant. See Ordering Information)
- High Surge Current Capability and High Current Capability

Maximum Ratings @ 25°C (Unless Otherwise Specified)

Parameter	Symbol	Value										Unit
		SR 502	SR 503	SR 504	SR 505	SR 506	SR 508	SR 5010	SR 5150	SR 5200		
Peak Repetitive Reverse Voltage	V _{RRM}	20	30	40	50	60	80	100	150	200	V	
Working Peak Reverse Voltage	V _{RWM}											
DC Blocking Voltage	V _R											
RMS Reverse Voltage	V _{RMS}	14	21	28	35	42	56	70	105	140	V	
Average Rectified Forward Current	I _{F(AV)}	5									A	
Non-Repetitive Peak Surge Current @ 8.3ms Half Sine Wave	I _{FSM}	150									A	
Current Squared Time @1ms≤t≤8.3ms	I²t	93									A²s	

Marking Code

Part Number	Marking Code
SR502	SR502
SR503	SR503
SR504	SR504
SR505	SR505
SR506	SR506
SR508	SR508
SR5010	SR5010
SR5150	SR5150
SR5200	SR5200


Internal Structure

Pin	Description	Simplified Outline	Graphic Symbol
1	Cathode	 XXXXX = Marking Code	
2	Anode		

Note: 1. High temperature solder exemption applied, see EU directive annex 7a.

5 Amp Schottky Rectifier 20 to 200 Volts

DO-201AD

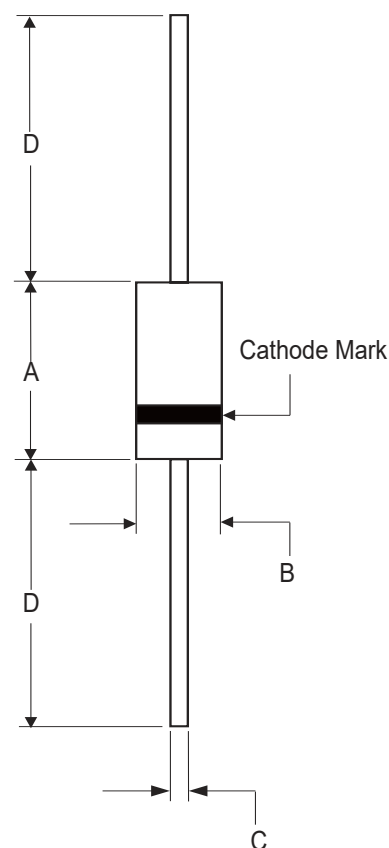

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.287	0.374	7.30	9.50	
B	0.189	0.208	4.80	5.30	
C	0.048	0.052	1.20	1.30	
D	1.000	-----	25.40	-----	

Thermal characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
T_J	Operating Junction Temperature Range		-55		150	°C
T_{stg}	Storage Temperature Range		-55		150	°C
$R_{th(J-L)}$	Thermal Resistance from Junction to Lead	Note 1		8		°C/W
$R_{th(J-C)}$	Thermal Resistance from Junction to Case	Note 1		10		°C/W
$R_{th(J-A)}$	Thermal Resistance from Junction to Ambient	Note 1		25		°C/W

Note: 1. Thermal resistance from junction to lead PCB mounting 0.375" (9.5 mm) lead length.

Electrical Characteristics @ 25°C Unless Otherwise Specified

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage SR502 ~ SR504 SR505 ~ SR506 SR508 ~ SR5010 SR5150 ~ SR5200	V_F	$I_F=5A; T_J=25^{\circ}C$			0.55 0.70 0.85 0.90	V
Reverse Current SR502 ~ SR506 SR508 ~ SR5200	I_R	at Rated $V_R; T_J=25^{\circ}C$ at Rated $V_R; T_J=100^{\circ}C$ at Rated $V_R; T_J=25^{\circ}C$ at Rated $V_R; T_J=100^{\circ}C$			0.1 10 0.01 1	mA
Junction Capacitance SR502 ~ SR504 SR505 ~ SR506 SR508 ~ SR5010 SR5150 ~ SR5200	C_J	$V_R=4V; f=1MHz; T_J=25^{\circ}C$		275 195 135 95		pF

Curve Characteristics

Fig. 1 - Forward Current Derating Curve

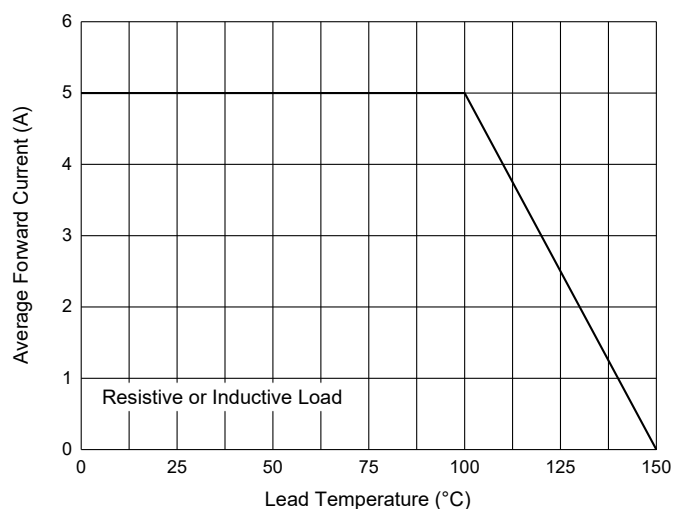


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

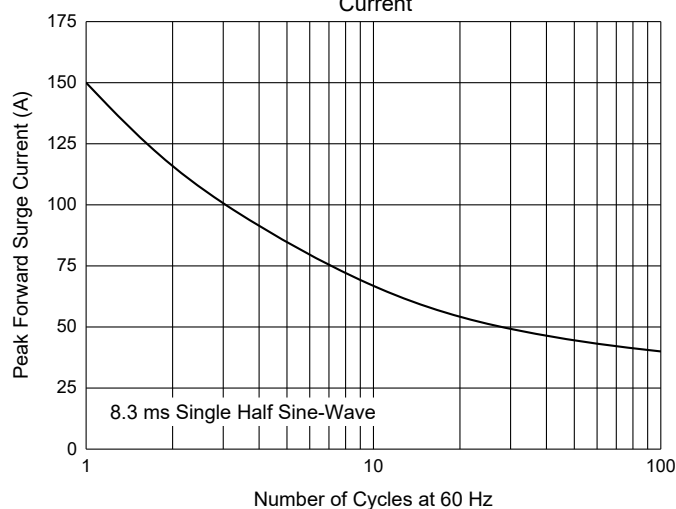


Fig. 3 - Typical Forward Characteristics

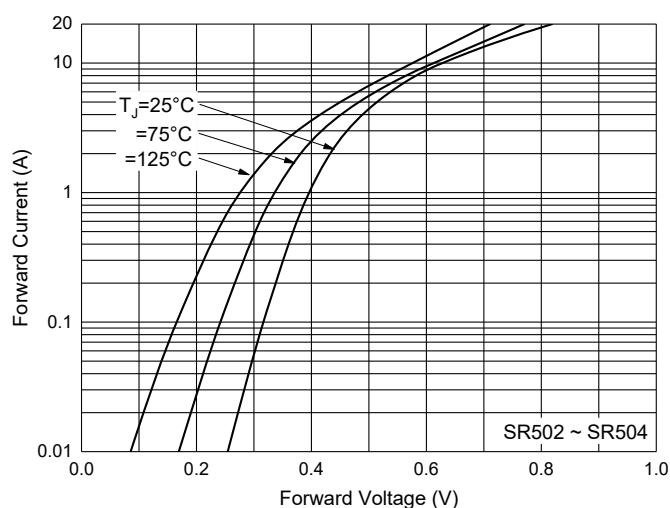


Fig. 4 - Typical Reverse Leakage Characteristics

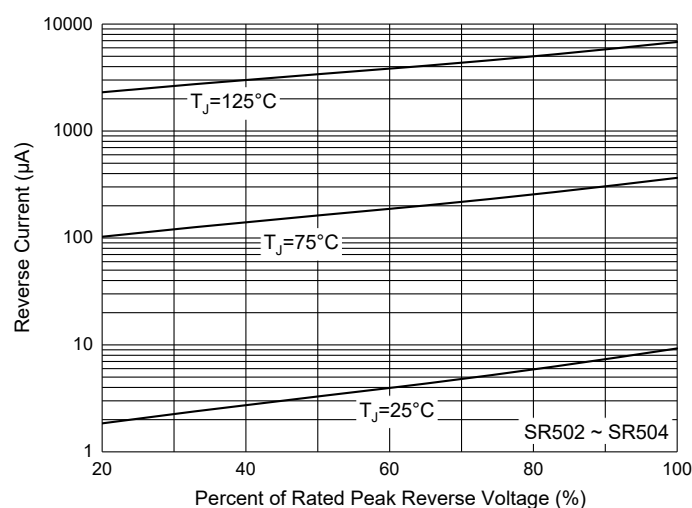


Fig. 5 - Typical Forward Characteristics


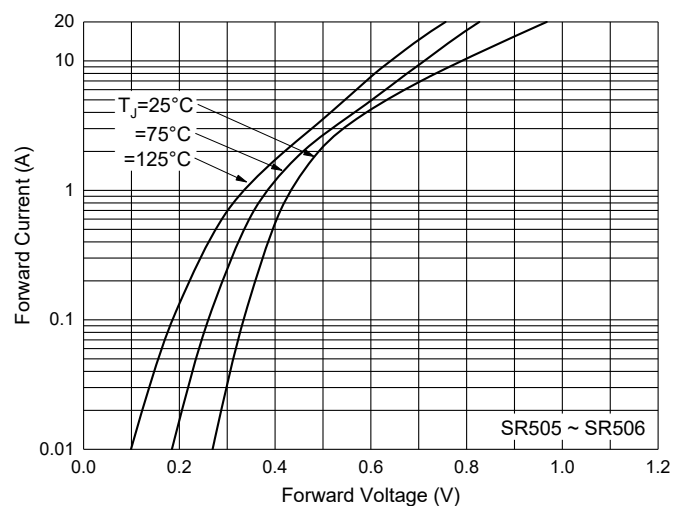


Fig. 6 - Typical Reverse Leakage Characteristics

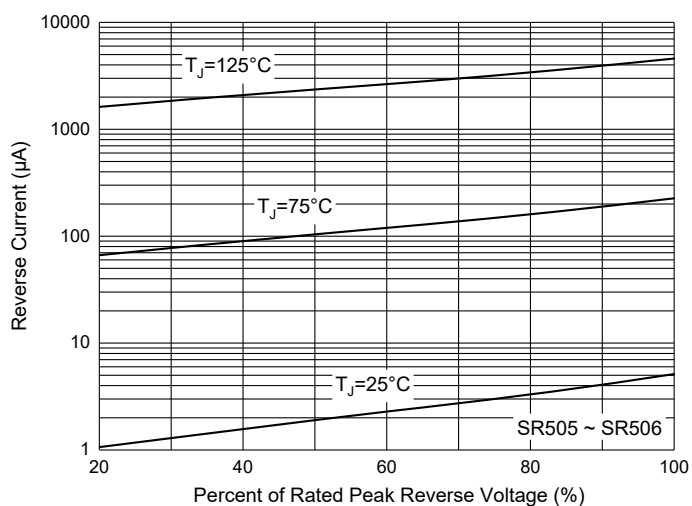

Curve Characteristics

Fig. 7 - Typical Forward Characteristics

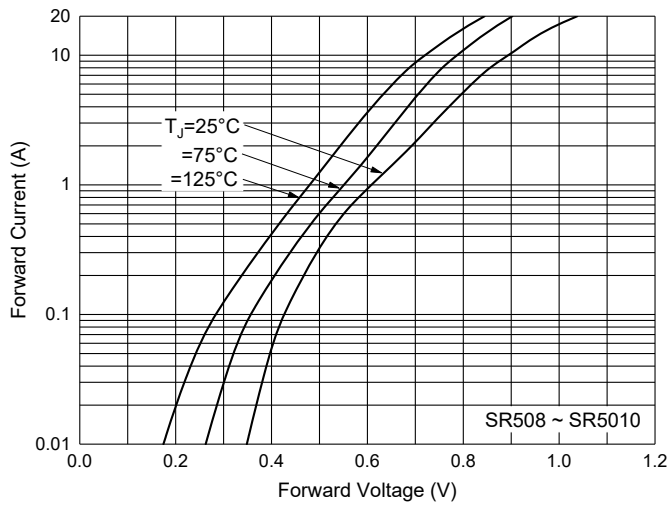


Fig. 8 - Typical Reverse Leakage Characteristics

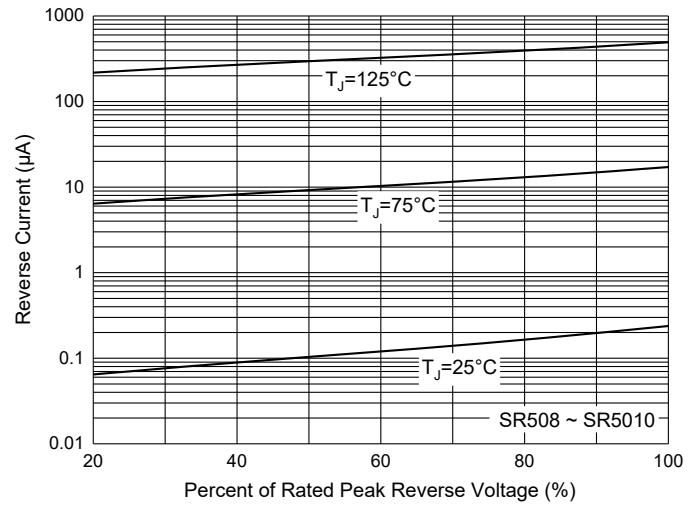


Fig. 9 - Typical Forward Characteristics

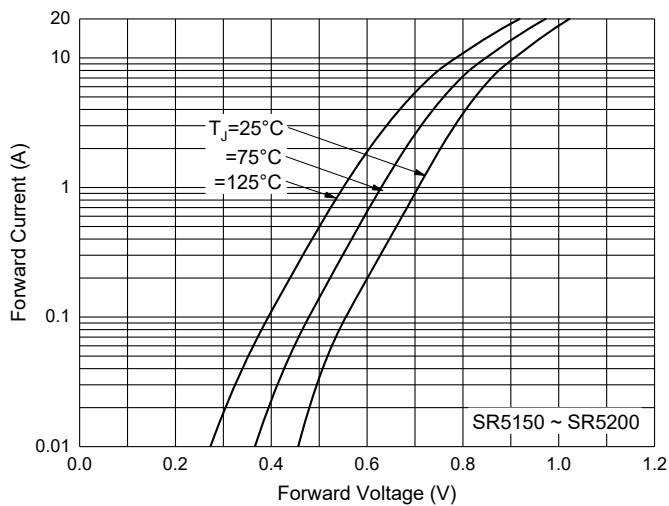


Fig. 10 - Typical Reverse Leakage Characteristics

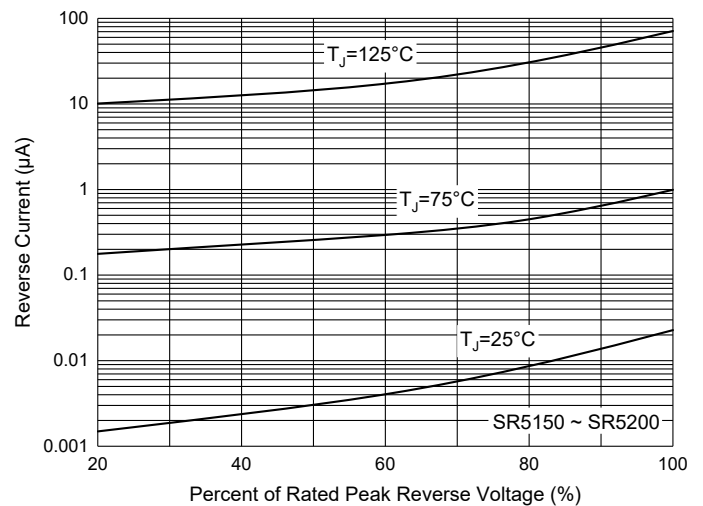


Fig. 11 - Typical Capacitance Characteristics


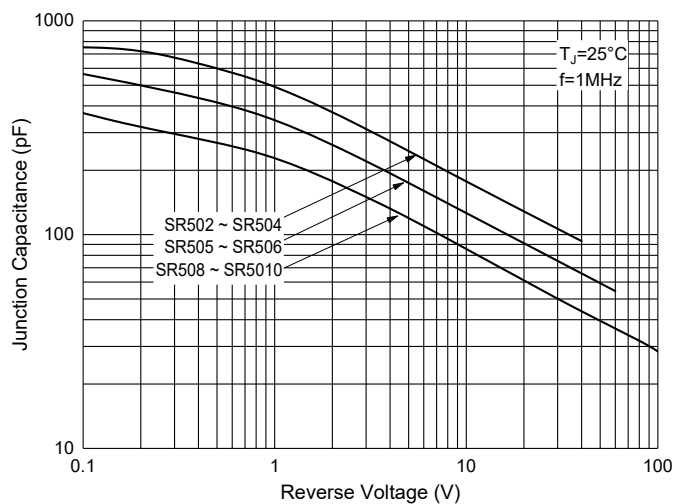


Fig. 12 - Typical Capacitance Characteristics

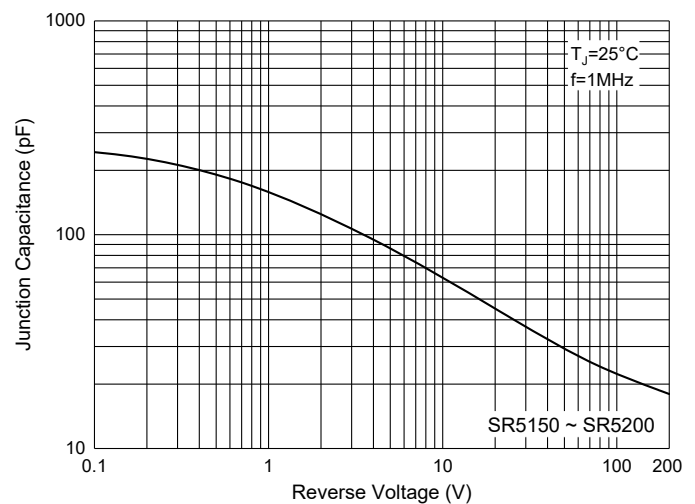

Ordering Information

Device	Packing
Part Number - TP	Tape&Reel:1.2Kpcs/Reel
Part Number - AP	Ammo Packing: 1.2Kpcs/Ammo Box
Part Number - BP	Bulk:500pcs/Box,12Kpcs/Carton

Note : Adding "-HF" Suffix For Halogen Free, eg. Part Number-TP-HF

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp** . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp** . and all the companies whose products are represented on our website, harmless against all damages. **Micro Commercial Components Corp.** products are sold subject to the general terms and conditions of commercial sale, as published at <https://www.mccsemi.com/Home/TermsAndConditions>.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Micro Commercial Components \(MCC\):](#)

[SR506-TP](#) [SR5010-TP](#) [SR5200-TP](#) [SR504-TP](#) [SR504-AP](#) [SR504-BP](#) [SR5150-AP](#) [SR5150-BP](#) [SR5150-TP](#)
[SR5200-AP](#) [SR5200-BP](#) [SR5200-BPC02](#) [SR5010-AP](#) [SR506-BP](#) [SR5010-BP](#) [SR506-AP](#)