

■ Features :

- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Ultra-miniature size, light weight
- Cooling by free air convection
- Isolation class II
- UL60601-1/IEC60601-1/EN60601-1 medical safety approved
- No load power consumption<0.5W
- 100% full load burn-in test
- Fixed switching frequency at 67KHz
- High reliability
- 3 years warranty




SPECIFICATION

| MODEL                 | NFM-10-3.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | NFM-10-5                                                                                                                                         | NFM-10-12    | NFM-10-15    | NFM-10-24      |              |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|----------------|--------------|
| OUTPUT                | DC VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 3.3V                                                                                                                                             | 5V           | 12V          | 15V            | 24V          |
|                       | RATED CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 2.5A                                                                                                                                             | 2A           | 0.85A        | 0.67A          | 0.42A        |
|                       | CURRENT RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 0 ~ 2.5A                                                                                                                                         | 0 ~ 2A       | 0 ~ 0.85A    | 0 ~ 0.67A      | 0 ~ 0.42A    |
|                       | RATED POWER                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 8.25W                                                                                                                                            | 10W          | 10.2W        | 10.05W         | 10.08W       |
|                       | RIPPLE & NOISE (max.) Note.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 80mVp-p                                                                                                                                          | 80mVp-p      | 150mVp-p     | 150mVp-p       | 240mVp-p     |
|                       | VOLTAGE ADJ. RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 3 ~ 3.63V                                                                                                                                        | 4.5 ~ 5.5V   | 10.8 ~ 13.2V | 13.5 ~ 16.5V   | 21.6 ~ 26.4V |
|                       | VOLTAGE TOLERANCE Note.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ±2.0%                                                                                                                                            | ±2.0%        | ±1.0%        | ±1.0%          | ±1.0%        |
|                       | LINE REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ±1.0%                                                                                                                                            | ±1.0%        | ±0.5%        | ±0.5%          | ±0.5%        |
|                       | LOAD REGULATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | ±1.0%                                                                                                                                            | ±1.0%        | ±0.5%        | ±0.5%          | ±0.5%        |
|                       | SETUP, RISE TIME                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 1000ms, 20ms/230VAC      1000ms, 20ms/115VAC at full load                                                                                        |              |              |                |              |
| HOLD UP TIME (Typ.)   | 100ms/230VAC      24ms/115VAC at full load                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                  |              |              |                |              |
| INPUT                 | VOLTAGE RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 85 ~ 264VAC      120 ~ 370VDC                                                                                                                    |              |              |                |              |
|                       | FREQUENCY RANGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 47 ~ 440Hz                                                                                                                                       |              |              |                |              |
|                       | EFFICIENCY (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 66%                                                                                                                                              | 74%          | 78%          | 79%            | 79%          |
|                       | AC CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.25A/115VAC      0.15A/230VAC                                                                                                                   |              |              |                |              |
|                       | INRUSH CURRENT (Typ.)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | COLD START 25A/115VAC      45A/230VAC                                                                                                            |              |              |                |              |
| PROTECTION            | OVERLOAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Above 105% rated output power<br>Protection type : Hiccup mode, recovers automatically after fault condition is removed                          |              |              |                |              |
|                       | OVER VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 3.8 ~ 4.95V                                                                                                                                      | 5.75 ~ 6.75V | 13.8 ~ 16.2V | 17.25 ~ 20.25V | 27.6 ~ 32.4V |
|                       | OVER TEMPERATURE Note.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Tj 140°C typically (U1) detect on main control IC<br>Protection type : Shut down o/p voltage, recovers automatically after temperature goes down |              |              |                |              |
| ENVIRONMENT           | WORKING TEMP.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | -20 ~ +70°C (Refer to output load derating curve)                                                                                                |              |              |                |              |
|                       | WORKING HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 20 ~ 90% RH non-condensing                                                                                                                       |              |              |                |              |
|                       | STORAGE TEMP., HUMIDITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | -40 ~ +85°C, 10 ~ 95% RH                                                                                                                         |              |              |                |              |
|                       | TEMP. COEFFICIENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | ±0.03%/°C (0 ~ 50°C)                                                                                                                             |              |              |                |              |
|                       | VIBRATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes                                                                          |              |              |                |              |
| SAFETY & EMC (Note 4) | SAFETY STANDARDS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | UL60601-1, TUV EN60601-1, IEC60601-1 approved                                                                                                    |              |              |                |              |
|                       | WITHSTAND VOLTAGE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | I/P-O/P:4KVAC                                                                                                                                    |              |              |                |              |
|                       | ISOLATION RESISTANCE                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | I/P-O/P:100M Ohms/500VDC                                                                                                                         |              |              |                |              |
|                       | EMI CONDUCTION & RADIATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | Compliance to EN55011(CISPR11), EN55022 (CISPR22) Class B                                                                                        |              |              |                |              |
|                       | HARMONIC CURRENT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | Compliance to EN61000-3-2, -3                                                                                                                    |              |              |                |              |
|                       | EMS IMMUNITY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Compliance to EN61000-4-2, 3, 4, 5, 6, 8, 11; ENV50204, EN55024, EN60601-1-2, EN61204-3, medical level, criteria A                               |              |              |                |              |
| OTHERS                | MTBF                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 723.2Khrs min.      MIL-HDBK-217F (25°C)                                                                                                         |              |              |                |              |
|                       | DIMENSION                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 65*45*22mm (L*W*H)                                                                                                                               |              |              |                |              |
|                       | PACKING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 0.045Kg; 120pcs/6.4Kg/0.97CUFT                                                                                                                   |              |              |                |              |
| NOTE                  | <ol style="list-style-type: none"> <li>1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>2. Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf &amp; 47uf parallel capacitor.</li> <li>3. Tolerance : includes set up tolerance, line regulation and load regulation.</li> <li>4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.</li> <li>5. The over temperature protection (OTP) is the built-in function of the control IC (U1). The activating level described above is based on the specification provided by the IC manufacturer.</li> </ol> |                                                                                                                                                  |              |              |                |              |


■ Mechanical Specification

Unit:inch(mm)

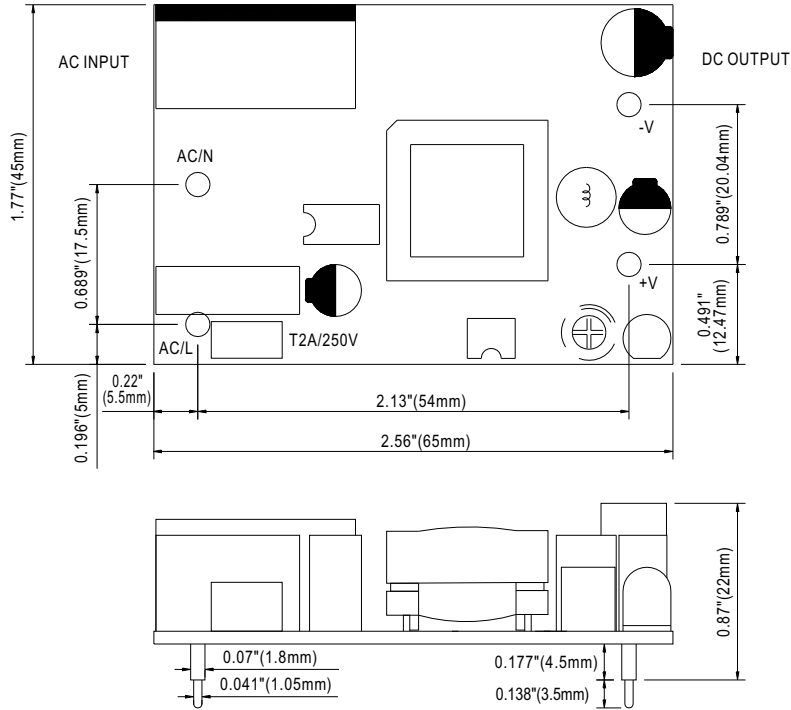


■ Block Diagram


fosc : 67KHz

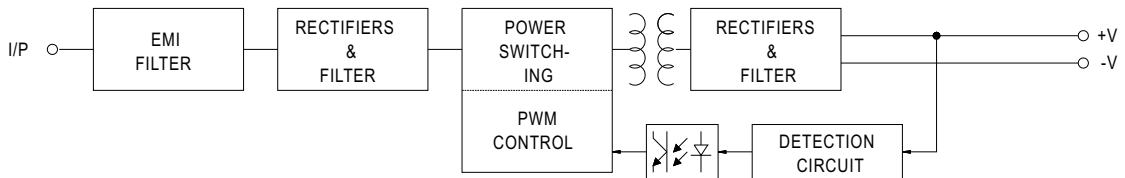

■ Derating Curve

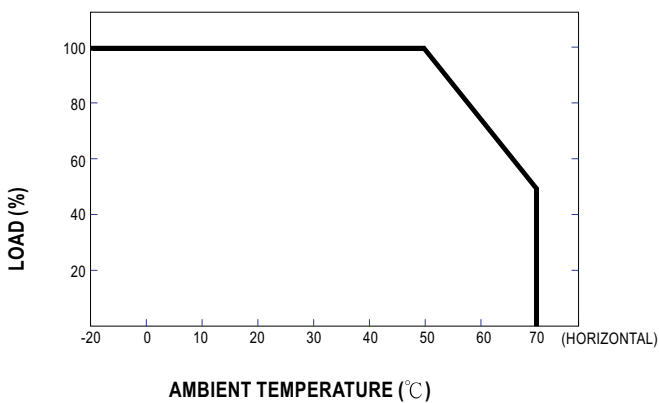

■ Output Derating VS Input Voltage

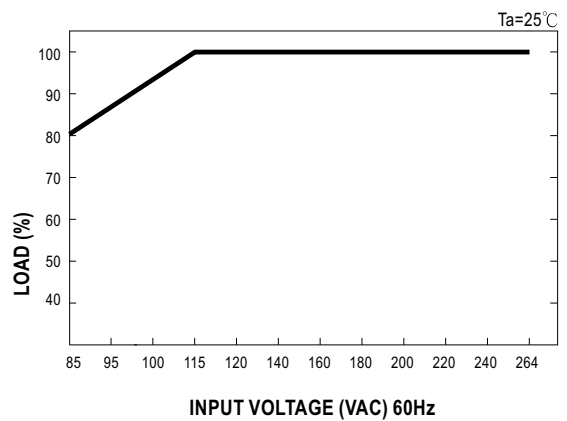

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## MEAN WELL:

[NFM-10-3.3](#) [NFM-10-5](#) [NFM-10-12](#) [NFM-10-15](#) [NFM-10-24](#)