



dimensions (tolerance $\pm 0,1\text{mm}$)

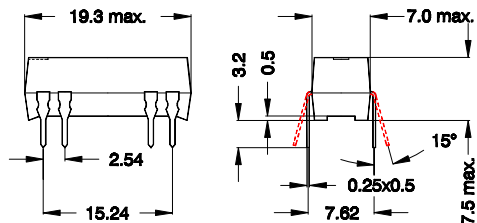

layout 21 L pitch 2,54 / top view



marking

Type
data-code EN 60062

MEDER electronic
DIP24-2A72-21L

coil data	condition	Min.	Typ.	Max.	unit
coil resistance	at 20°C	1800		2200	Ω
nominal voltage			24		VDC
pull-in voltage				16.8	VDC
drop-out voltage		3.6			VDC
coil voltage	at 20°C			47,0	VDC
coil voltage	at 60°C			30,2	VDC
nominal power	determined with nominal voltage and rated current		288		mW

contact data 72 (Form A/Dry)					
contact material				Ruthenium	
rated power	each combination of the switching voltage and current must not exceed the given rated power			15	W
switching voltage				200	VDC
switching current				1,0	A
carry current				1,25	A
static contact resistance	initial values measured with $1,4 \times AT_{\text{pull-in}}$			150	m Ω
Insulation resistance	RH Ω 45%	10^{10}			Ω
breakdown voltage		250			VDC
capacitance	without test coil			0,3	pF

relay data					
insulation resistance coil-contact		10^{11}			Ω
insulation voltage coil-contact		1,5			kVDC
shock	½ sine wave, duration 11ms			150	g
vibration	50 – 2000Hz			10	g
operate time including bounce	measured at $1,4 \times AT_{\text{pull-in}}$		0,5		ms
release time			0,1		ms

general data					
operating temperature		-20		70	°C
storing temperature		-35		95	°C
soldering temperature	10 sec. at			260	°C
cleaning				fully sealed	
material of case				mineral-filled epoxy	
material of pins				Cu-alloy tinned	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Standex Electronics:](#)

[DIP24-2A72-21L](#)