




Dimensions mm[inch]

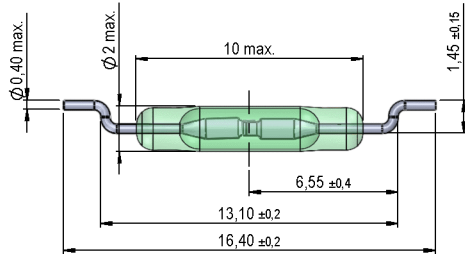


Recommended PCB Pad Layout

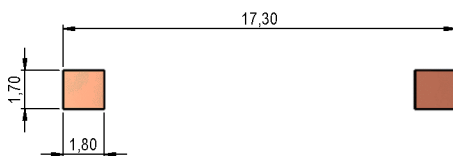

Isometric

Scale 1:2
Maßstab 1:2


Tape & Reel

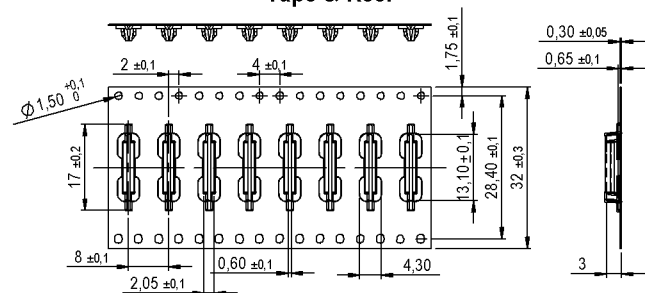

Magnetic properties	Conditions	Min	Typ	Max	Unit
Pull-In excitation (Reference value)	Reed switch unmodified measured in coil- "define operation"	10		15	AT
Test-Coil	Reed switch unmodified		KMS-01		
Pull-In excitation (modified contact)	Reed switch modified phys. conditioned tolerance of +/- 1 AT	18		28	AT
Test-Coil	Reed switch modified		KMS-22		
Pull-In in milliTesla (modified conta	MS150 - phys. caused tolerance +/- 0,1mT	1,15		1,81	mT

Contact data 87/2	Conditions	Min	Typ	Max	Unit
Contact-material			Ruthenium		
Contact rating	Any DC combination of V & A not to exceed their individual max.'s			10	VA
Switching voltage	DC or Peak AC			200	VDC
Switching voltage	DC or Peak AC			150	VAC
Switching current	DC or Peak AC			0,4	A
Carry current	DC or Peak AC			0,5	A
Contact resistance static	Measured with 40% overdrive Start Value			150	mOhm
Contact resistance dynamic	Maximum value 1,5 ms after excitation Start Value			200	mOhm
Contact resistance dynamic	Difference value 1,5 ms after excitation			20	mOhm
Insulation resistance	RH <45 %, 100V - to all points	1			GOhm
Breakdown voltage	according to EN 60255-5	250			VDC
Operate time incl. bounce	measured with 40% overdrive			0,6	ms
Release time	measured with no coil excitation			0,05	ms
Capacitance	@ 10 kHz across open switch			0,2	pF
Resonant Frequency		7.000	7.500	8.000	Hz
Operating Frequency			500		Hz

Environmental data	Conditions	Min	Typ	Max	Unit
Shock	1/2 sine wave duration 11ms			50	G
Vibration	from 10 - 2000 Hz			20	G
Ambient temperature		-40		130	°C
Storage temperature		-55		130	°C
Soldering temperature	wave soldering max. 5 sec.			260	°C

General data	Conditions	Min	Typ	Max	Unit
Packaging			Tape & Reel, p/n 4001350062		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Standex Electronics:](#)

[MK23-87-B-4](#)