



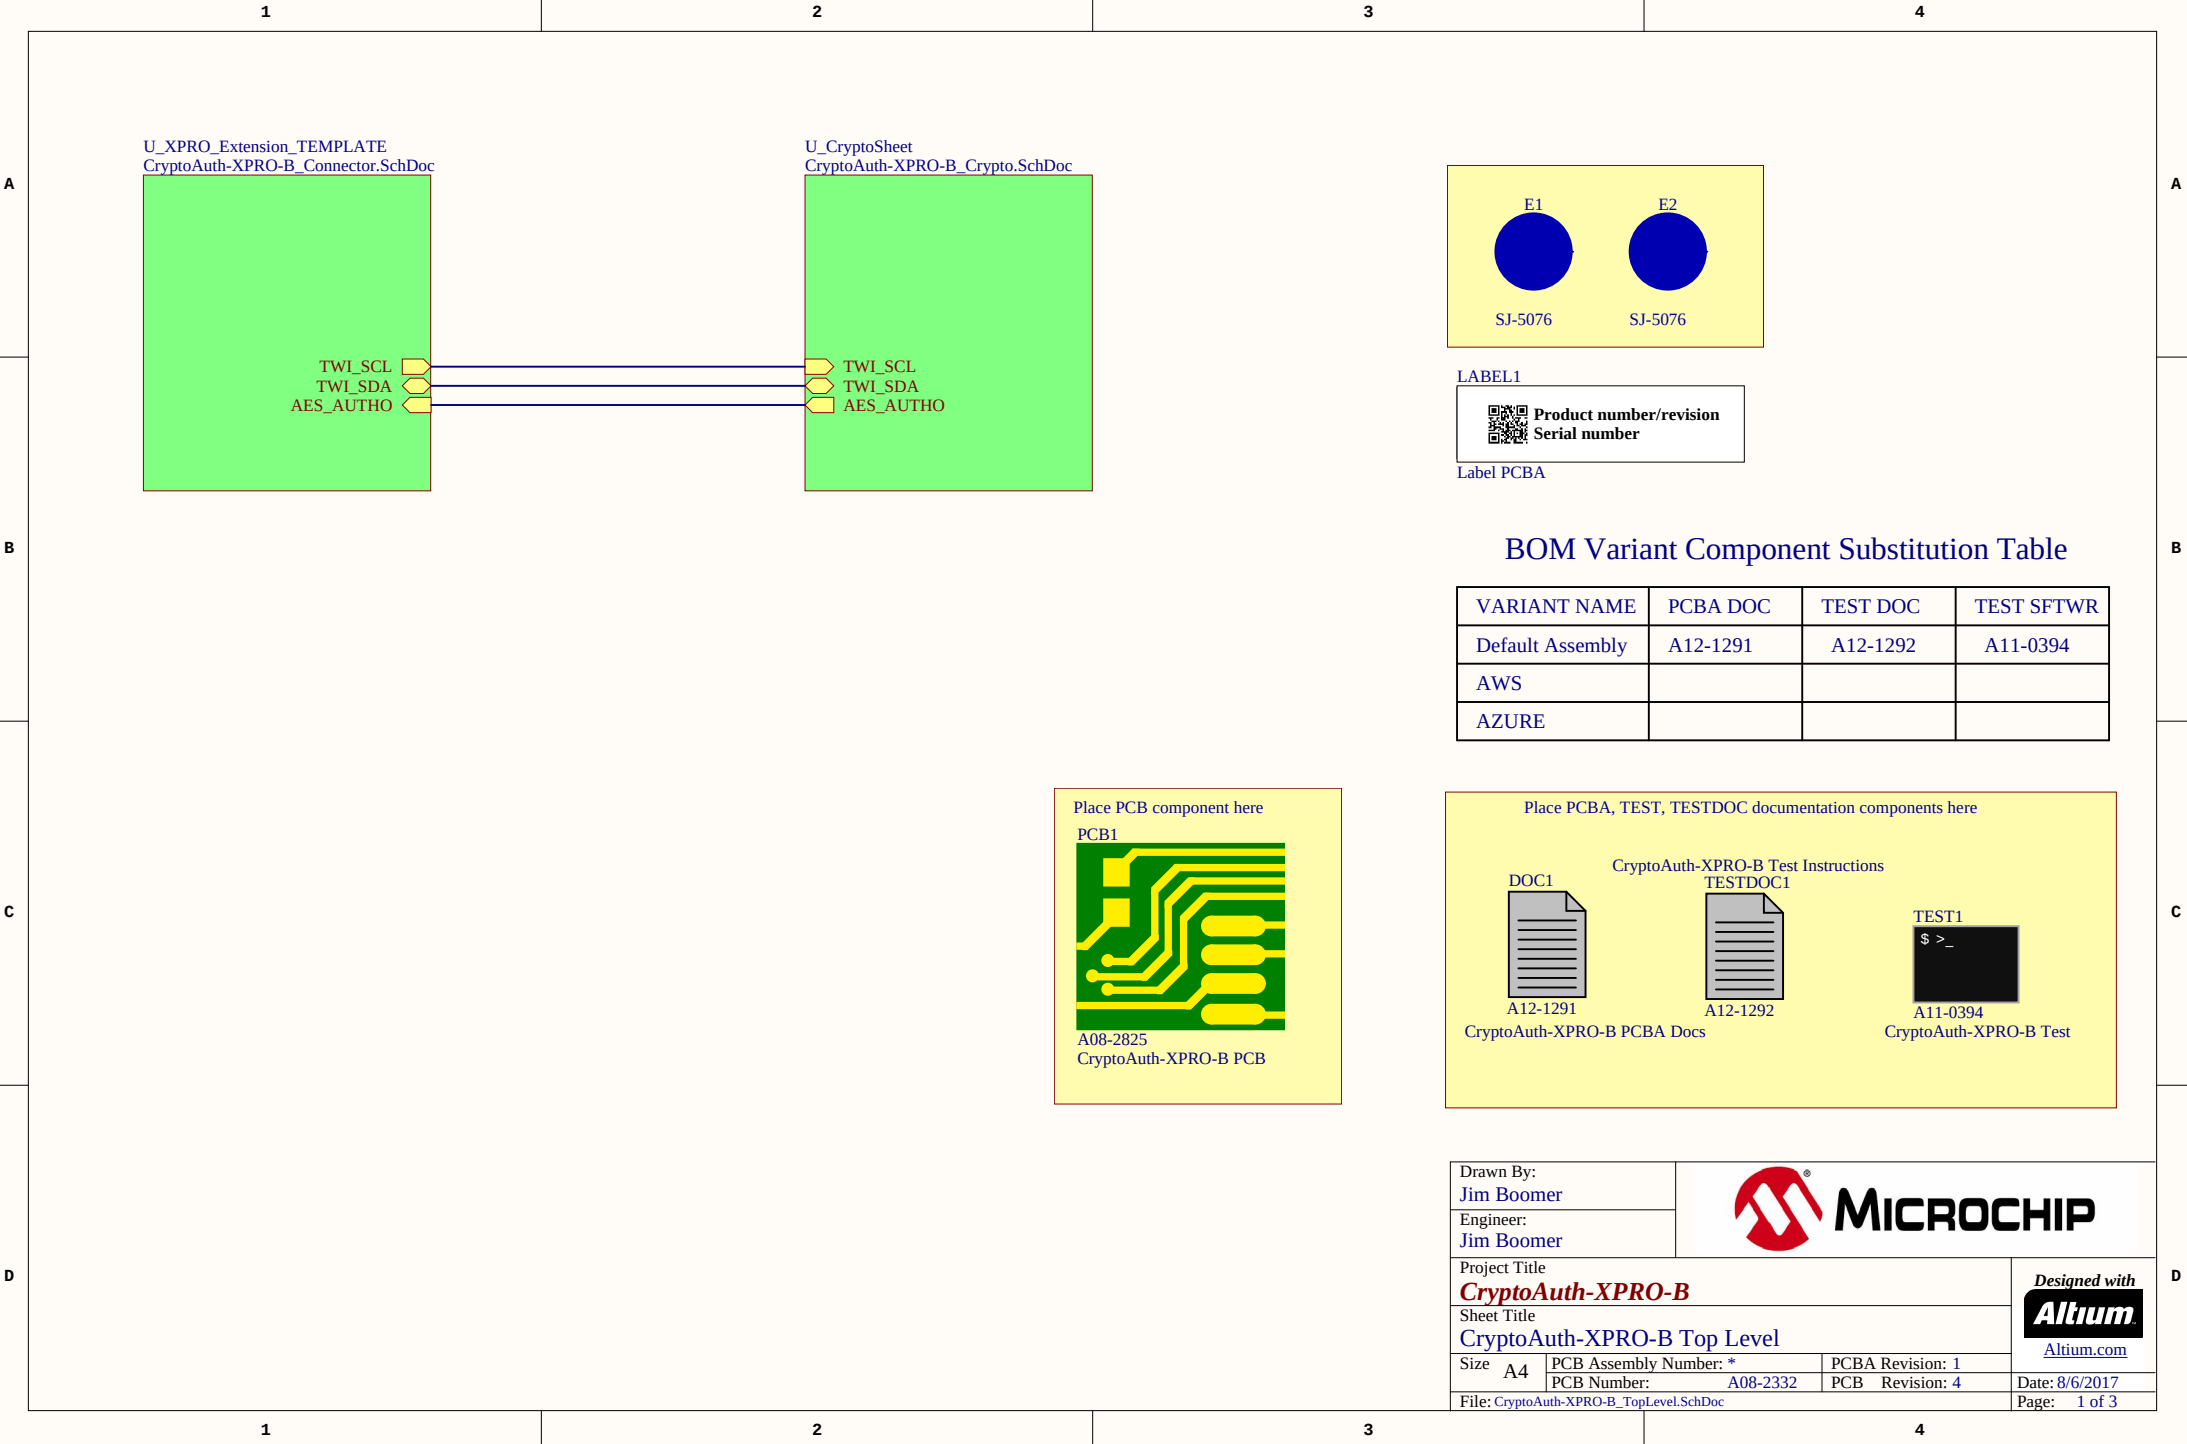


Extension Identification

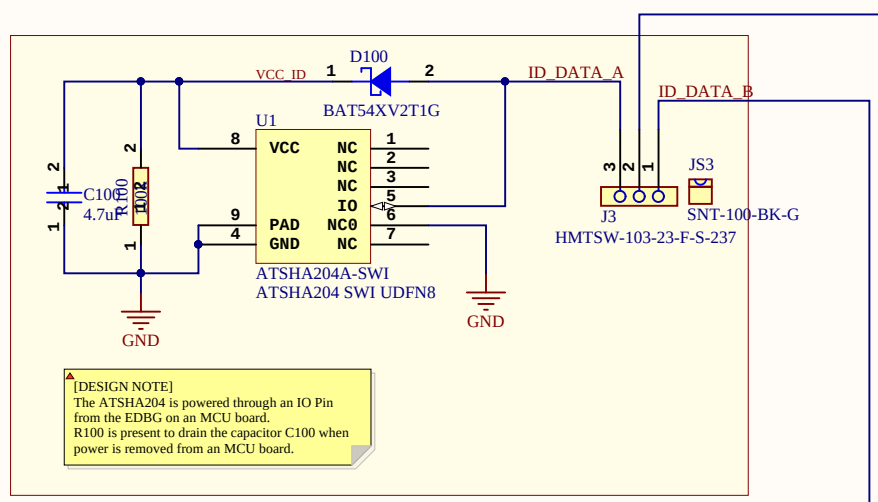


[DESIGN NOTE]
The ATSHA204 is powered through an IO Pin from the EDBG on an MCU board. R100 is present to drain the capacitor C100 when power is removed from an MCU board.

Standard Extension Header (Female)

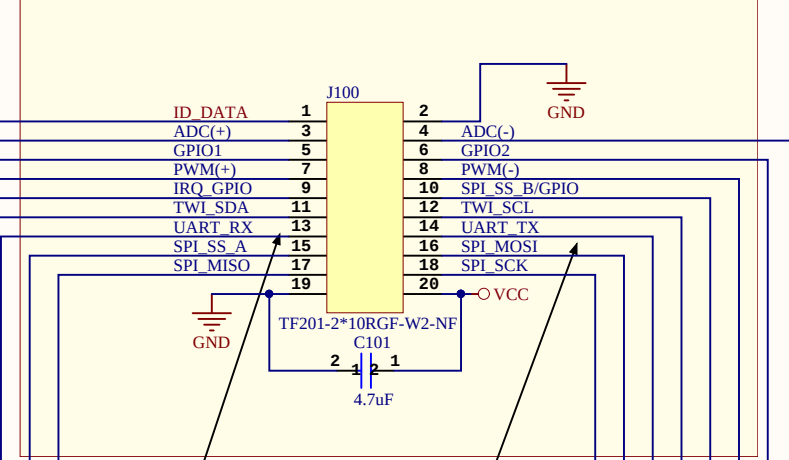

[DESIGN NOTE]
IMPORTANT NOTICE:
UART_RX and UART_TX refer to RX (input) and TX (output) at the target device side. Connect UART_RX to TX of the UART device on the extension board and UART_TX to RX of the UART device on the extension board.

AES_AUTHO
TWI_SDA

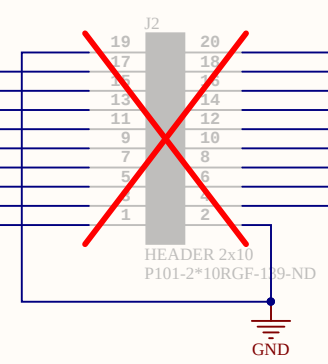

A

B

C

D

A


B

C

D

If I2C Address of ECC508A and ECC608A Are the same then:
- ECC508A = 2-4
- ECC608A = 1-3

If I2C Address is different then both jumpers may be placed.

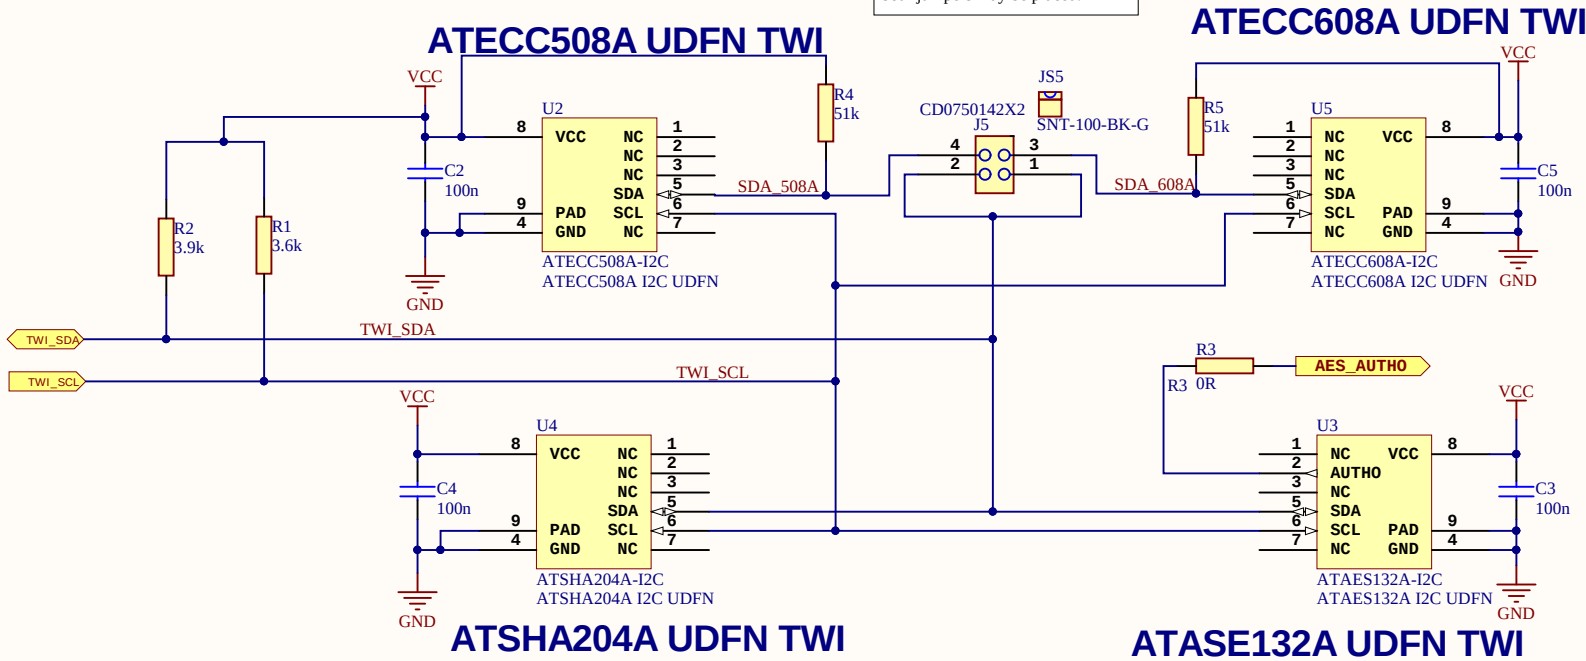

F1
FIDUCIAL
FIDUCIAL 1.5mm

F2
FIDUCIAL
FIDUCIAL 1.5mm

Drawn By:
Jim Boomer
Engineer:
Jim Boomer



Project Title
CryptoAuth-XPRO-B
Sheet Title
Crypto Device Schematic

Designed with
Altium
Altium.com

Size A4	PCB Assembly Number: * A08-2332	PCBA Revision: 1 PCB Revision: 4	Date: 8/6/2017 Page: 3 of 3
------------	------------------------------------	-------------------------------------	--------------------------------

File: CryptoAuth-XPRO-B_Crypto.SchDoc

2 1



EXT



EXT




MICROCHIP
www.microchip.com/cryptokits

CRYPTOAUTH X PLAINED PRO

1 2

J2




Microchip Corp © 2017




12C


WAKE




DEV	ADDR	PULSE
AES	0xA0	NO
SHA	0xC8	YES
ECC	0xC0	YES



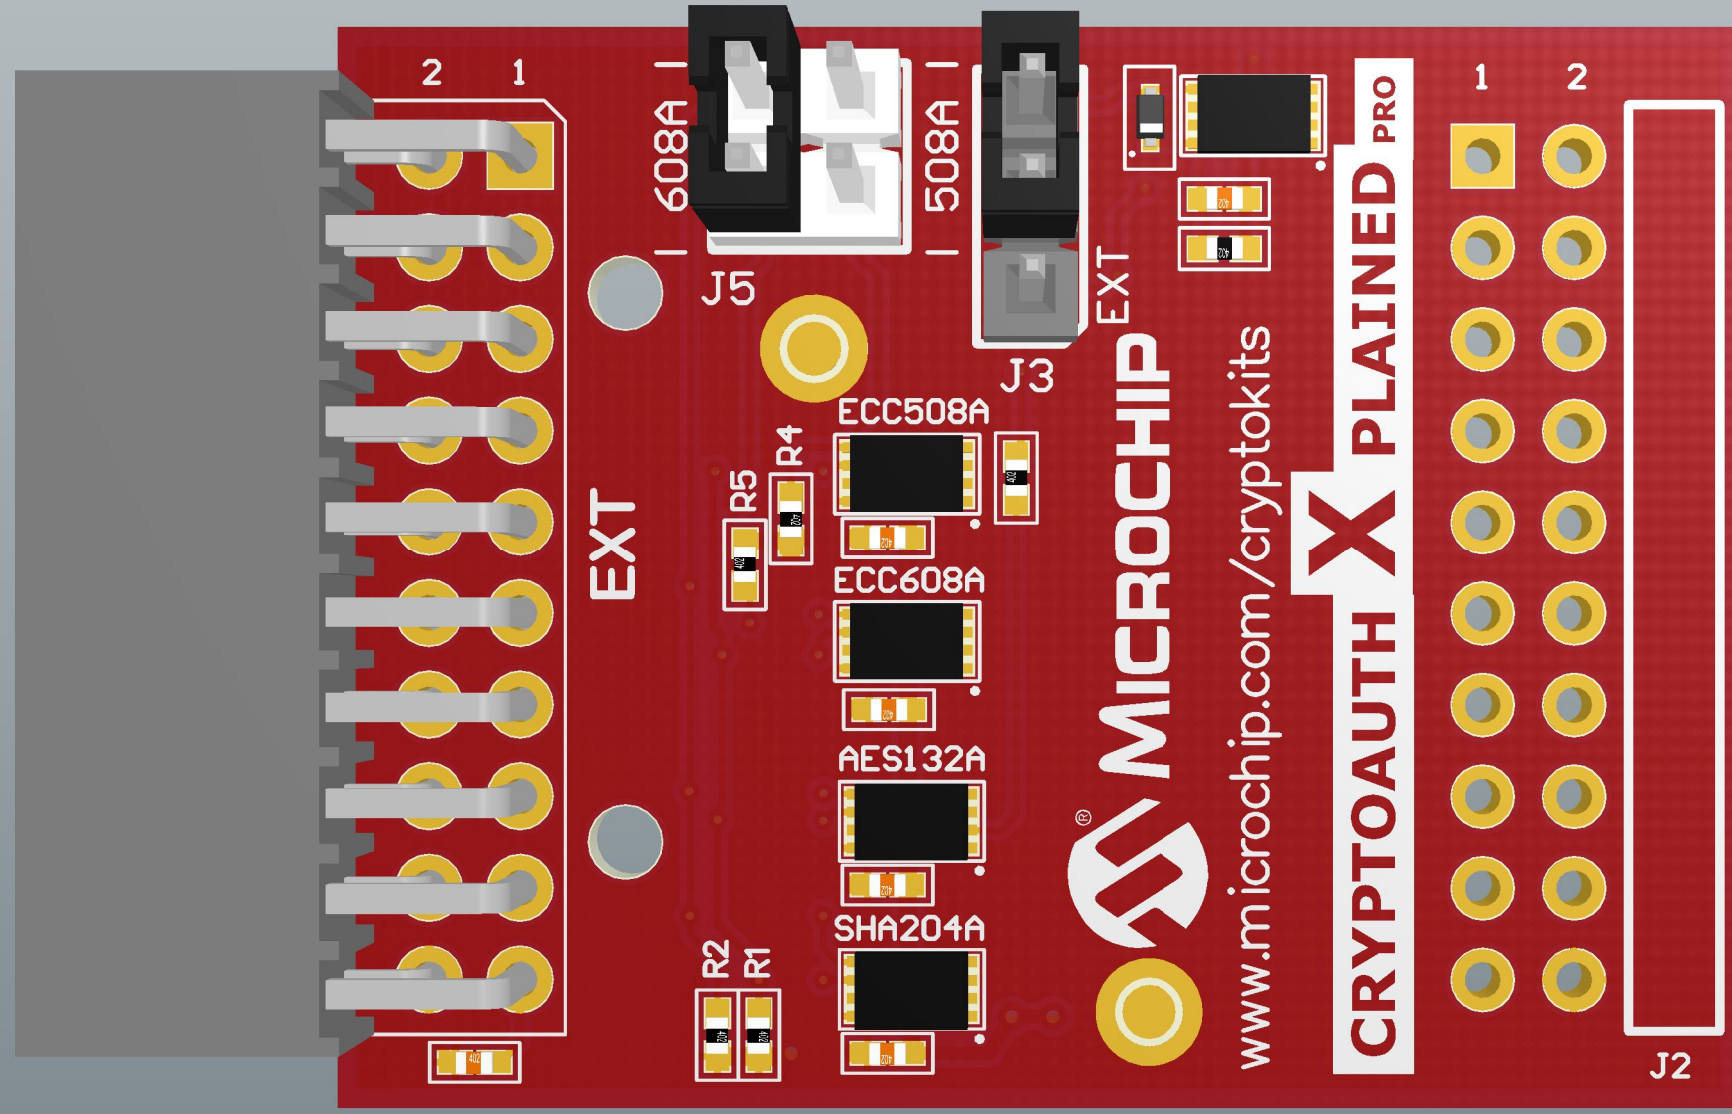

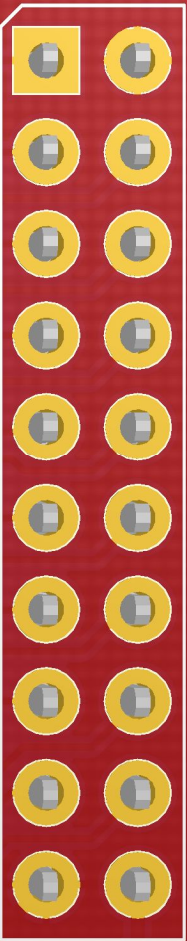


Microchip Corp © 2017





PCBA LABEL
A08-2825 Rev 1



I2C WAKE
DEV | ADDR | PULSE



AES	0xA0	NO
SHA	0xC8	YES
ECC	0xC0	YES

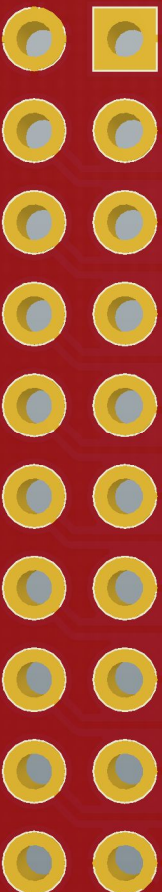

2 1

EXT



R2
R1



R5
R4



SHA204A



AES132A



ECC608A



ECC508A



J3



508A



608A

J5



MICROCHIP

EXT

www.microchip.com/cryptokits

CRYPTOAUTH X

PLAINED


PRO


1

2



J2

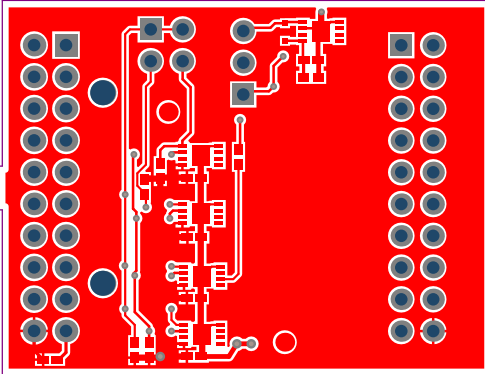

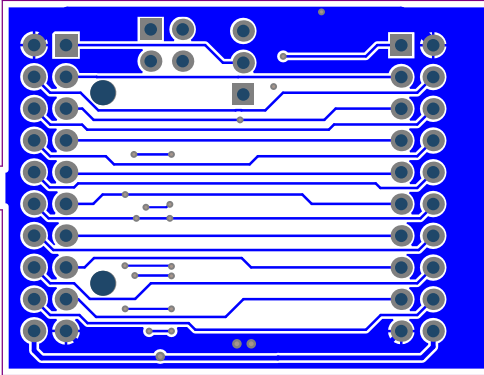

ECC	0xC0	YES
SHA	0xC8	YES
AES	0xA0	NO
DEV	ADDR	BUT SE
	ISC	MAKE

A08-S852 Rev 1

BCBA LABEL



Microchip Corp © 2012



Component list

CryptoAuth-XPRO-B Top Level

Source Data From:

CryptoAuth_XPRO-B.PrjPCB

Project:

CryptoAuth_XPRO-B.PrjPCB

Variant:

NoExtHdr

Report Date:

8/6/2017

2:08:16 PM

Print Date:

8/6/2017

1:55:58 PM



MICROCHIP

Fitted	Designator	Quantity	Value	Manufacturer	MPN	Description
Fitted	C100, C101	2	4.7uF	Murata	GRM155R60J475ME87D	Ceramic capacitor, SMD 0402, X5R, 6.3V, +/-20% (de33687)
Fitted	C2, C3, C4, C5	4	100n	Kemet	C0402C104K4RACTU	Ceramic capacitor, SMD 0402, X7R, 16V, +/-10%
Fitted	D100	1	BAT54XV2T1G	ON Semiconductor	BAT54XV2T1G	Schottky diode, If:200mA, Vf:0.35V, Vrm:30V, SOD-523
Fitted	DOC1	1	CryptoAuth-XPRO-B PCBA Docs			CryptoAuth-XPRO-B Documentation
Fitted	E1, E2	2	SJ-5076	3M	SJ-5076	2.8mm adhesive feet,diam 8.0mm
Fitted	J100	1	TF201-2*10RGF-W2-NF	Pro-data International Corp	F201-2*10RGF-W2-NF	2x10, female pin header receptable, right-angled, 2.54mm pitch, THM, Pin In Paste
Fitted	J3	1	HMTSW-103-23-F-S-237	SAMTEC	HMTSW-103-23-F-S-237	1x3 pin header, 2.54mm pitch, Pin-in-Paste THM, 1mm hole
Fitted	J5	1	CD0750142X2	Freber	CD0750142X2	2x2 pin header, 2.54 mm pitch, Pin-in-Paste THM
Fitted	JS3	1	SNT-100-BK-G	SAMTEC	SNT-100-BK-G	Jumper cap for 2.54mm pinheader
Fitted	JS5	1	SNT-100-BK-G	SAMTEC	SNT-100-BK-G	Jumper cap for 2.54mm pinheader
Fitted	LABEL1	1	Label PCBA	ACT Logimark AS	505462	PCBA identification label PP Top White Gloss
Fitted	PCB1	1	CryptoAuth-XPRO-B PCB			CryptoAuth-XPRO-B PCB
Fitted	R1	1	3.6k			Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	R100	1	100k			Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	R2	1	3.9k			Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	R3	1	0R	(n/a)	RMCF0402ZT0R00	RES 0.0 OHM 1/16W 0402 SMD
Fitted	R4	1	51k			Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	R5	1	51k			Thick film resistor, SMD 0402, 1/16W, 1%
Fitted	TEST1	1	CryptoAuth-XPRO-B Test			Fixture test for CryptoAuth-XPRO-B
Fitted	TESTDOC1	1	CryptoAuth-XPRO-B Test Instructions			CryptoAuth-XPRO-B Test Instructions
Fitted	U1	1	ATSHA204 SW1 UDFN8	ATMEL	ATSHA204A-MAHCZ-T	ATSHA204 with 1-wire interface and UDFN8 package
Fitted	U2	1	ATECC508A I2C UDFN			ATECC508A with an I2C Interface and a 8 Pin UDFN Package with Paddle
Fitted	U3	1	ATAES132A I2C UDFN			AES132A with an I2C Interface in a UDFN Package
Fitted	U4	1	ATSHA204A I2C UDFN			ATSHA204A with and I2C Interface in the UDFN8 Pin Package with Paddle
Fitted	U5	1	ATECC608A I2C UDFN	MICROCHIP	ATECC608A-MAHDA-S	ATECC608A with an I2C Interface and a 8 Pin UDFN Package with Paddle
Not Fitted	J2	0	P101-2*10RGF-139-ND	Pro-data International Corp	P101-2*10RGF-139-ND	Pin header, 2x10, Right Angle, 2.54mm, THM, Pin In Paste

30

Approved

Notes

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[ATCRYPTOAUTH-XPRO-B](#)