

**PD69208M and PD69200**  
**Datasheet**  
**8-Port PSE PoE Manager and PSE PoE Controller**  
September 2019



## Contents

---

|          |   |           |
|----------|---|-----------|
| <b>1</b> | <b>Revision History .....</b>                         | <b>1</b>  |
| 1.1      | Revision 6.0 .....                                    | 1         |
| 1.2      | Revision 5.0 .....                                    | 1         |
| 1.3      | Revision 4.0 .....                                    | 1         |
| 1.4      | Revision 3.0 .....                                    | 2         |
| 1.5      | Revision 2.0 .....                                    | 2         |
| 1.6      | Revision 1.2 .....                                    | 2         |
| 1.7      | Revision 1.1 .....                                    | 2         |
| 1.8      | Revision 1.0 .....                                    | 2         |
| <b>2</b> | <b>Overview .....</b>                                 | <b>3</b>  |
| 2.1      | Features .....  | 4         |
| 2.2      | Applications .....                                    | 4         |
| 2.3      | Typical PoE Application .....                         | 5         |
| <b>3</b> | <b>Functional Descriptions .....</b>                  | <b>6</b>  |
| 3.1      | Digital Block Module .....                            | 6         |
| 3.2      | PD Detection Generator .....                          | 6         |
| 3.3      | Classification Generator .....                        | 6         |
| 3.4      | Current Limiter .....                                 | 7         |
| 3.5      | Main Power MOSFET .....                               | 7         |
| 3.6      | Analog to Digital Converter .....                     | 7         |
| 3.7      | Power on Reset .....                                  | 7         |
| 3.8      | Voltage Regulator .....                               | 7         |
| 3.9      | Clock .....   | 7         |
| 3.10     | SPI Communication .....                               | 8         |
| 3.11     | PD69208M SPI Addressing .....                         | 8         |
| 3.12     | Broadcast .....                                       | 8         |
| 3.13     | SPI Timing .....                                      | 9         |
| 3.14     | PD69200 I2C Address Selection .....                   | 10        |
| <b>4</b> | <b>Electrical Specifications .....</b>                | <b>11</b> |
| 4.1      | PD69200 Electrical Characteristics and Features ..... | 11        |
| 4.2      | PD69208M Electrical Characteristics .....             | 12        |
| 4.2.1    | Electrical Characteristics .....                      | 12        |
| 4.2.2    | Detection .....                                       | 13        |
| 4.2.3    | Classification .....                                  | 13        |
| 4.2.4    | Port Real Time Protection .....                       | 14        |
| 4.2.5    | Port Current Monitoring .....                         | 15        |

|          |  |           |
|----------|--|-----------|
| 4.2.6    | Port Voltage Monitoring .....                                    | 15        |
| 4.2.7    | Main Voltage Monitoring .....                                    | 15        |
| 4.2.8    | Temperature Monitoring .....                                     | 16        |
| 4.2.9    | Digital Interface .....  | 16        |
| 4.2.10   | Immunity .....   | 16        |
| 4.3      | Absolute Maximum Ratings .....                                   | 17        |
| <b>5</b> | <b>Pin Descriptions .....</b>                                    | <b>18</b> |
| 5.1      | Pin Configuration and Pinout .....                               | 18        |
| 5.2      | PD69200 and PD69208M Pin Descriptions .....                      | 20        |
| 5.2.1    | PD69200 Pin Descriptions .....                                   | 20        |
| 5.2.2    | PD69208M Pin Descriptions .....                                  | 23        |
| 5.3      | Recommended PCB Layouts .....                                    | 25        |
| 5.3.1    | PD69200 Recommended PCB Layout for 32-Pin QFN 5 mm x 5 mm .....  | 25        |
| 5.3.2    | PD69208M Recommended PCB Layout for 56-Pin QFN 8 mm x 8 mm ..... | 27        |
| <b>6</b> | <b>Package Specification .....</b>                               | <b>32</b> |
| 6.1      | Thermal Specifications .....                                     | 34        |
| 6.2      | Recommended Solder Reflow .....                                  | 35        |
| 6.3      | Tape and Reel .....  | 36        |
| 6.3.1    | PD69200 Tape and Reel Specification .....                        | 36        |
| 6.3.2    | PD69208M Tape and Reel Specification .....                       | 37        |
| 6.4      | Reference Documents .....  | 40        |
| <b>7</b> | <b>Application Information .....</b>                             | <b>41</b> |
| 7.1      | PD Detection .....   | 41        |
| 7.2      | Legacy (Reduced Capacitor) Detection .....                       | 41        |
| 7.3      | Classification .....   | 41        |
| 7.4      | Port Start-Up .....  | 42        |
| 7.5      | Over-Load Detection and Port Shut Down .....                     | 42        |
| 7.6      | Disconnect Detection .....                                       | 42        |
| 7.7      | IC Thermal Monitoring .....                                      | 42        |
| 7.8      | Over-Temperature Protection .....                                | 43        |
| 7.9      | V MAIN Out of Range Protection .....                             | 43        |
| 7.10     | 2-Pair and 4-Pair Ports .....                                    | 43        |
| 7.11     | Power Management .....   | 43        |
| 7.12     | Port Power Limit .....   | 43        |
| 7.13     | Reset Pin .....  | 43        |
| 7.14     | System OK Indication .....                                       | 43        |
| 7.15     | Interrupt Pin .....  | 44        |
| 7.16     | Port Matrix Control .....  | 44        |
| 7.17     | Power Good Interrupt .....                                       | 44        |
| 7.18     | LED Stream .....   | 44        |

|                              |    |
|------------------------------|----|
| 7.19 Power Sequencing .....  | 45 |
| 8 Ordering Information ..... | 46 |

# 1 Revision History

---

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

## 1.1 Revision 6.0

Revision 6.0 of this document was published in September 2019. The following is a summary of the changes.

- [Features \(see page 4\)](#) list was updated.
- [Typical PoE Application \(see page 5\)](#) figure and note were updated.
- Fast PoE and Perpetual PoE were added to [PD69200 Features Description \(see page 11\)](#) table.
- Max accuracy value was updated in [PD69208M Main Voltage Monitoring \(see page 15\)](#) table.
- [PD69208M Pin Diagram \(see page 19\)](#), [PD69200 Top-Layer Copper PCB Layout \(see page 25\)](#), and [PD69200 Top-Layer Solder Paste and Vias PCB Layout for Thermal Pad Array \(see page 26\)](#) figures were updated.
- Typical  $\Theta_{JB}$  value was updated in [PD69208M Thermal Specifications \(see page 34\)](#) table.
- [Typical IEEE802.3bt Port PoE Voltage Diagram \(see page 42\)](#) was updated.
- [Ordering Information \(see page 46\)](#) was updated.

## 1.2 Revision 5.0

Revision 5.0 of this document was published in November 2018. The following was a summary of the changes.

- Updated the Features and Applications details.
- Port real time protection details are updated for  $I_{PORT}$ ,  $I_{LIM}$ ,  $I_{CUT}$ ,  $I_{UDL}$ ,  $P_{PWR}$ , and  $T_{MPS}$ .
- Port current monitoring information is updated for accuracy.
- Main voltage information is updated for accuracy.
- The PD69200 pin diagram is updated.
- The Top-Layer Pin Geometry measurement is updated.
- The PD692000 Thermal Specifications table is added.
- The company name Freescale is replaced with NXP across the document.
- Updated Figures 8 - 12.
- Added table footnotes for D, VVVV, and SS.

## 1.3 Revision 4.0

Revision 4.0 of this document was published in February 2018. The following was a summary of the changes.

- Preliminary designation was removed.
- Thermal specifications were updated.
- The tape specification was updated.
- Tape mechanical data was added.
- Ordering part numbers were updated.

## 1.4 Revision 3.0

Revision 3.0 of this document was published in November 2017. The following was a summary of the changes.

- Maximum storage temperature value is no longer preliminary.
- The link to stencil and via plug recommendations was updated.
- Application information was updated.
- Maximum slew rate requirement of 100 mS was added.
- Manufacturing and ordering part number information was updated.
- Updated revision 2.0 history to include entry for the redefinition of quiescent current in terms of port threshold.

## 1.5 Revision 2.0

Revision 2.0 of this document was published in September 2017. The following was a summary of the changes.

- Updated the recommended PCB layout for better manufacturability.
- Redefined quiescent current in terms of port threshold.
- Added the PD69208M Manufacturing and Ordering Part Numbers table.
- Added a note about I<sup>2</sup>C communication configuration.
- Added table footnotes for ESD (HBM and CDM).
- Updated the main voltage monitoring table for accuracy data.
- Updated the Peak Classification Temperature (TP).
- Updated the description for pin 24 for PD69200.
- Updated the description for pin 19 for PD69208M.
- Updated the thermal specifications table.
- Changed the notation from  $V_{PORT\_NEGx}$  to  $V_{PORT}$ .
- Added a footnote for Absolute Storage Temperature in the table.
- Updated the accuracy values in the Port Current Monitoring table.
- Updated the  $R_{SIG\_LOW}$  and  $R_{SIG\_HIGH}$  values in the Detection table.
- Updated the LSB value in the Temperature Monitoring table.
- Updated the values for D11, D12, D15, D16, and D17 in the SPI Timing Diagram Description table.

## 1.6 Revision 1.2

Revision 1.2 of this document was published in August 2016. The following was a summary of the changes.

- According to PCN155881, qualification of UTAC Thailand assembly for PD6920X. Parts from UTAC will be identified by different marking that was added.
- Match 802.3af ILIM and  $I_{INRUSH}$  levels to IEEE standard levels.
- Match 802.3at ILIM low level to IEEE standard levels.

## 1.7 Revision 1.1

Revision 1.1 of this document was published in July 2016. The following was a summary of the changes.

- Updated the feature's list. Changed MSL1 of PD69208 to MSL3.
- Updated ordering information. Changed MSL1 of PD69208 to MSL3.

## 1.8 Revision 1.0

Revision 1.0 of this document was published in December 2015. This was the first publication.

## 2 Overview

---

Microsemi's PD69208M Power over Ethernet (PoE) manager IC integrates power, analog, and state-of-the-art logic into a single 56-pin, plastic QFN package. The device is used in Ethernet switches and Midspans to allow network devices to share power and data over the same cable. The PD69208M device is an 8-port, mixed-signal, and high-voltage PoE driver. Together with the PD69200 external MCU, it performs as a PSE system. Microsemi's PoE controller, PD69200, is a cost-effective, pre-programmed MCU designed to implement enhanced mode.

PD69208M/PD69200 chip-set supports PoE Powered Device (PD) detection, power-up, and protection according to IEEE standards, as well as legacy/pre-standard PD detection. It provides PD real-time protection through the following mechanisms: overload, under-load, over-voltage, over-temperature, and short-circuit, and enables operation in a standalone mode. It also executes all real-time functions as specified in IEEE802.3at and IEEE802.3bt Class 3.

PD69208M supports supply voltages between 32 V and 57 V without additional power supply sources. A system that powers over four pairs can be implemented by combining two ports of PD69208M, enabling an extra feature for a simple and low-cost, high-power PD device. Ongoing monitoring of system parameters for the host software is available via communication. Internal thermal protection is implemented in the chip. PD69208M is a low-power dissipation device that uses internal MOSFETs and internal 100 mΩ sense resistors.

PD69200 features an ESPI bus for all PD69208M. It is developed based on NXP Kinetis\_L family, MKL15Z128VFM4, that is embedded with the ARM Cortex™-M0+ core. It also uses I<sup>2</sup>C or UART interface to the host CPU, and is designed to support software field upgradable through the communication interface.

PD69208M is available in a 56-pin, 8 mm × 8 mm QFN package. PD69200 is available in 32-pin, 5 mm × 5 mm QFN package.

## 2.1 Features

- 8 independent channels
- Complies with IEEE802.3af-2003, IEEE802.3at-2009 (including two-event classification), and IEEE802.3bt
- Supports Fast PoE
- Supports Perpetual PoE
- Drives 2-pair power ports or 4-pair ports
- Supports pre-standard PD detection
- Single DC voltage input (32 V to 57 V)
- Built-in 3.3 V and 5 V regulators
- Input voltage out of range protection
- Wide ambient temperature range: -40 °C to 85 °C
- On-chip over-temperature thermal protection and monitoring
- Low-power dissipation (0.1  $\Omega$  sense resistor and 0.2  $\Omega$  MOSFET  $R_{ds(on)}$  per channel)
- Includes Reset command pin
- 4× direct address configuration pins
- Continuous port monitoring and system data
- Configurable load current setting
- Configurable PSE AT/AF/BT-Type3 modes
- Power soft start mechanism
- Voltage monitoring/protection
- Internal power on reset
- Emergency power management supporting four configurable power bank I/Os
- Advance System Power Management algorithm supports up to 96 physical ports
- Can be cascaded to up to 12 PoE devices (96 ports)
- Supports both UART and I<sup>2</sup>C interfaces to host CPU
- Backwards compatible with Microsemi communication protocol used at prior generations
- LED stream support
- System OK indication
- Software download via I<sup>2</sup>C or UART
- Detailed port status
- Programmable threshold temperature alarm limit
- Interrupt out pin for system and port events
- Forced port power ON function
- Port power limit setting
- Port matrix and priority
- Automatic PoE device type detection
- MSL3, RoHS compliant

## 2.2 Applications


- Power over Ethernet (all IEEE compliant 2-pair modes)
- Supports 4-pair and IEEE802.3bt PSE Type 3
- Switches/Routers/Midspans
- Industrial automation
- PoE for LED lighting



## 2.3 Typical PoE Application

The following figure illustrates the typical PoE application of PD69208M and PD69200 devices.

**Figure 1 • Typical PoE Application**

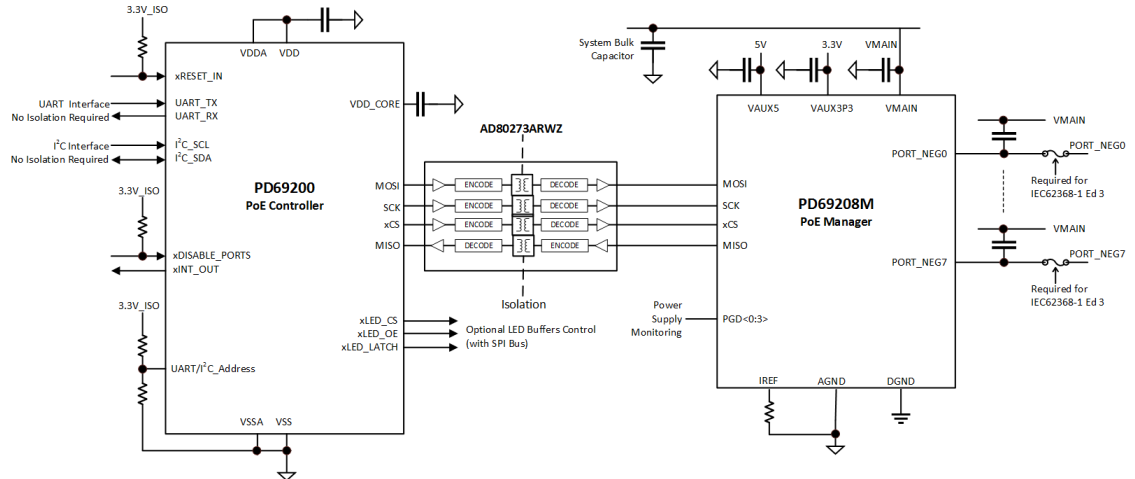


**Note:** For complete reference design, see Microsemi AN211 Designing an IEEE 802.3af/802.3at/802.3bt-Compliant PD69208 48-Port PoE System (Document Number: PD-000300282).

Fuses per port are not required for use in circuits with a total power level of up to 3 kW. This is because PD69208 is a UL 2367 (category QVRQ2) recognized component and fulfills limited power source (LPS) requirements of the latest editions of IEC60950-1 and EN60950-1. However, IEC62368-1 Ed 3 (released in October 2018 and becomes effective December 2020) requires per-port fuses for a system power supply greater than 250 W.

### 3 Functional Descriptions

The following illustration shows the functional blocks of PD69208M.

**Figure 2 • PD69208M Block Diagram**

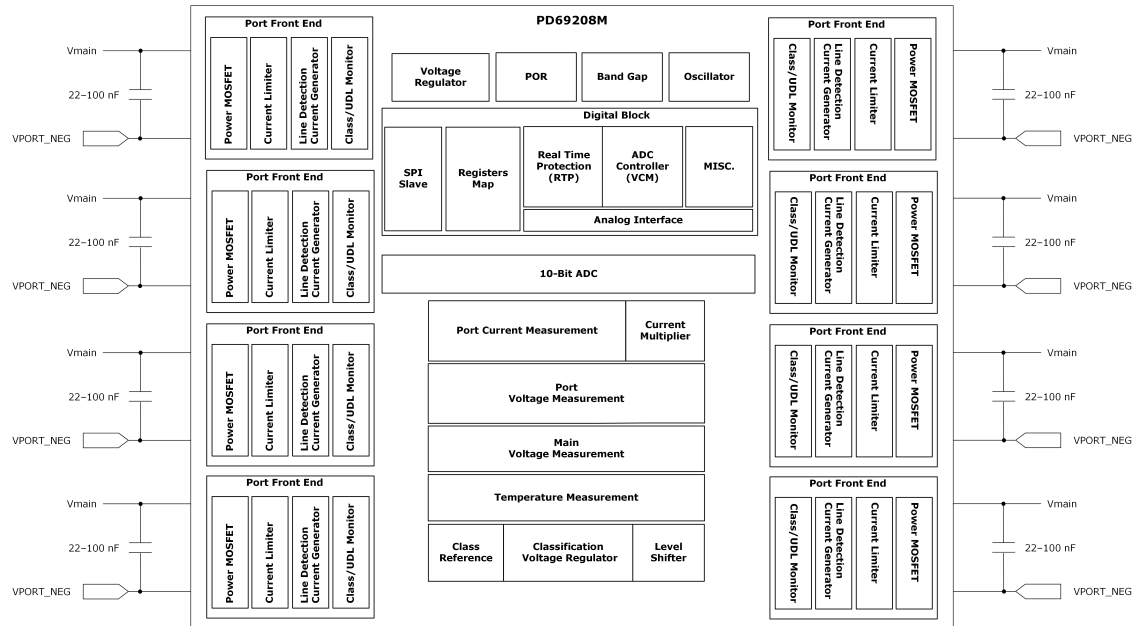

The following sections describe the functional blocks of PD69208M.

#### 3.1 Digital Block Module

The logic main control block includes digital timing mechanisms and state machines synchronizing and activating PoE functions according to PD69200 control commands, such as:

- Real Time Protection (RTP)
- Start Up Macro (DVDT)
- Load Signature Detection (RES DET)
- Classification Macro (CLASS)
- Voltage and Current Monitoring (VCM)
- ADC Interfacing
- Direct Digital Signals with Analog Block
- SPI Communication Block
- Registers

#### 3.2 PD Detection Generator

Upon request from PD69200 to main control module, the PD detection generator generates four different voltage levels to ensure a robust AF/AT/BT PD detection functionality.

#### 3.3 Classification Generator

Upon request from PD69200 to main control module, the state machine applies a regulated class event and mark event voltage to ports, as required by IEEE standards.

### 3.4 Current Limiter

This circuit continuously monitors the current of powered ports and limits the current to a pre-defined value set by AF/AT. When the current value exceeds this specific value, the system starts measuring the elapsed timing. If this interval is greater than a preset threshold, the port is disconnected.

### 3.5 Main Power MOSFET

Main power switching FET is used to control PoE current into the load.

### 3.6 Analog to Digital Converter

A 10-bit analog to digital converter (ADC) is used to convert analog signals into digital registers for the logic control module.

### 3.7 Power on Reset

Power on reset (PoR) monitors the internal 3.3 V and 5 V DC levels. If this voltage drops down below the specified threshold limit, a reset signal is generated and PD69208M is reset.

### 3.8 Voltage Regulator

The voltage regulator generates 3.3 V and 5 V for internal circuitry. These voltages are derived from  $V_{MAIN}$  supply. Connect the following to use the internal voltage regulator:

- $V_{AUX5}$  to DRV\_VAUX5
- $V_{AUX3P3}$  to VAUX3P3\_INT

The following three options reduce PD69208M power dissipation by regulating the voltage outside the chip:

- Use an external NPN transistor to regulate the 5 V. In this setup, the configuration of regulator pins should be as follows:
  - DRV\_VAUX5 is connected to NPN BASE
  - $V_{AUX5}$  is connected to NPN EMITTER (Connect Collector to  $V_{MAIN}$ )
  - $V_{AUX3P3}$  is connected to VAUX3P3\_INT
- Supply PD69208M with an external 5 V regulator. In this setup, regulator pins configuration should be as follows:
  - $V_{AUX3P3}$  is connected to VAUX3P3\_INT
  - DRV\_VAUX5 is not connected (left open)
  - $V_{AUX5}$  is connected to external 5 V
- Supply PD69208M with an external 3.3 V regulator. In this setup, regulator pins configuration should be as follows:
  - $V_{AUX5}$  is connected to DRV\_VAUX5
  - VAUX3P3\_INT is not connected (left open)
  - $V_{AUX3P3}$  is connected to external 3.3 V

These options can be implemented simultaneously to reduce PD69208M power dissipation.

### 3.9 Clock

PD69208M clock (CLK) is an internal 8 MHz clock oscillator.

### 3.10 SPI Communication

PD69208M uses SPI communication in SPI slave mode to communicate with the PD69200 MCU. Each PD69208M has an address determined by ADDR0-ADDR3 pins. The PD69200 can support up to 12 ICs. The actual frequency between PD69200 and PD69208M ICs is 1 MHz.

The following table lists the SPI communication packet structure.

**Table 1 • SPI Communication: Packet Structure**

| Control Byte Selects PD69208M<br>According to the Address | R/W Bit   | Internal<br>Register Address | Number of Words<br>(Only in Read Access) | Data Written to IC (in Write Access)<br>Read from IC (in Read Access) |
|---|-----------|------------------------------|--|---|
| 8 bits  | R(0)/W(1) | 8 bits                       | 8 bits                                   | 16 bits   |

### 3.11 PD69208M SPI Addressing

PD69208M operates in 8-bit address and 16-bit data. It responds to SPI transaction if the first SPI byte (IC address byte bits[7:1]) complies with the following:

**Table 2 • SPI Addressing**

| 3 Bits (Bit 7:5) | 4 Bits (Bit 4:1)  | 1 Bit (Bit 0) |
|------------------|-------------------|---------------|
| 000              | Address Input Pin | Read/Write    |

### 3.12 Broadcast

- A broadcast command is intended to instruct all connected PD69208M ICs to perform a specific operation.
- The broadcast command is a write command with the standard packet structure. In case of a broadcast read operation, the read data is not valid and the read operation has no impact.

**Table 3 • Broadcast**

| 3 Bits (Bit 7:5) | 4 Bits (Bit 4:1) | 1 Bit (Bit 0) |
|------------------|------------------|---------------|
| 001              | 0000             | Write         |

### 3.13 SPI Timing

Figure 3 • SPI Timing Diagram

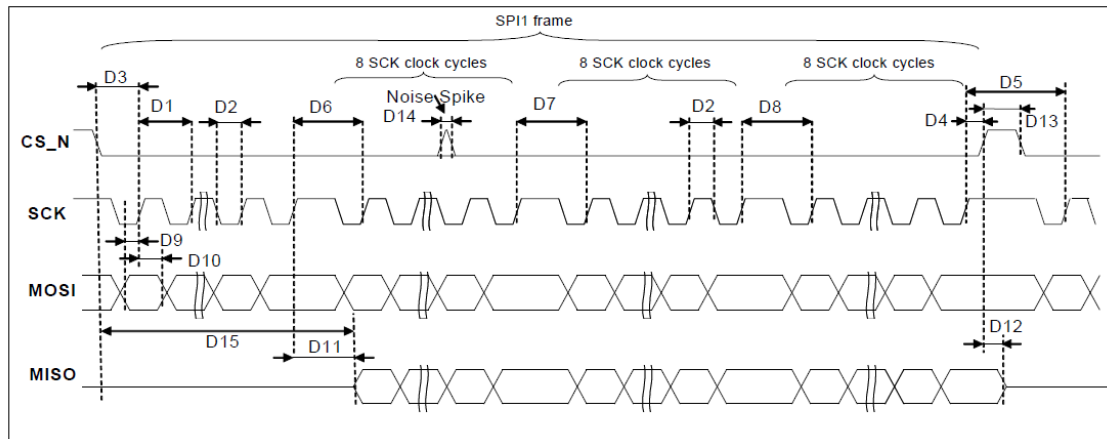


Table 4 • SPI Timing Diagram Description

| Name | Min Delay          | Max Delay                      | Description   |
|------|--------------------|--------------------------------|---|
| D1   | 910 ns             |                                | SPI clock period  |
| D2   | 45%                | 55%                            | SPI duty cycle  |
| D3   | 340 ns             |                                | SPI_CS setup to SPI clock positive edge (delay after SPI_CS active signal)      |
| D4   | 340 ns             |                                | SPI_CS hold to SPI clock positive edge (delay before SPI_CS inactive signal)    |
| D5   | 2 SPI clock cycles |                                | Delay between the last SCK in eSPI1 frame and first SCK at adjacent eSPI1 frame |
| D6   | 1 SPI clock cycles |                                | Between byte 0 (IC address) and byte 1 (address)                                |
| D7   | 1 SPI clock cycles |                                | Between byte 1 (address) and byte 2 (data)                                      |
| D8   | 1 SPI clock cycles |                                | Between byte 2 (MS data byte) and byte 3 (LS data byte)                         |
| D9   | 340 ns             |                                | MOSI setup time   |
| D10  | 340 ns             |                                | MOSI hold time  |
| D11  |                    | 700 ns                         | MISO tri-state to valid data from clock positive edge                           |
| D12  |                    | 700 ns                         | MISO valid data to tri-state from SPI_CS positive edge                          |
| D13  | 1 SPI clock cycles |                                | SPI_CS width (Delay eSPI1 frame to adjacent eSPI1 frame)                        |
| D14  |                    | 60 ns                          | Filtered glitch width   |
| D15  |                    | D3 + D11 + 24 SPI clock cycles | MISO tri-state from SPI_CS negative edge to valid data                          |
| D16  | 200 ns             |                                | MISO setup to SCK positive edge   |
| D17  | 200 ns             |                                | MISO hold to SCK positive edge  |

### 3.14 PD69200 I2C Address Selection

The I<sup>2</sup>C interface between the host CPU and a specific PD69200 requires setting the PD69200 address. This is done by applying a specific voltage level to pin #22 (I2C\_ADDR\_MEAS), as listed in the following table.

**Table 5 • I2C Address Selection**

| I2C_ADDR Voltage Level | I <sup>2</sup> C Address (Hexadecimal) |
|------------------------|--|
| 0.00 to 0.21 VDC       | UART                                   |
| 0.21 to 0.41 VDC       | 0x4                                    |
| 0.41 to 0.62 VDC       | 0x8                                    |
| 0.62 to 0.83 VDC       | 0xC                                    |
| 0.83 to 1.03 VDC       | 0x10                                   |
| 1.03 to 1.24 VDC       | 0x14                                   |
| 1.24 to 1.44 VDC       | 0x18                                   |
| 1.44 to 1.65 VDC       | 0x1C                                   |
| 1.65 to 1.86 VDC       | 0x20                                   |
| 1.86 to 2.06 VDC       | 0x24                                   |
| 2.06 to 2.27 VDC       | 0x28                                   |
| 2.27 to 2.48 VDC       | 0x2C                                   |
| 2.48 to 2.68 VDC       | 0x30                                   |
| 2.68 to 2.89 VDC       | 0x34                                   |
| 2.89 to 3.09 VDC       | 0x38                                   |
| 3.09 to 3.30 VDC       | 0x3C                                   |

UART communications configuration:

- Bits per second: 19,200 bps
- Data bits: 8
- Parity: None
- Stop bits: 1
- Flow control: None

I<sup>2</sup>C communication configuration:

- Address: 7 bits
- Host should support clock stretch
- Transaction: 15 bytes or 1 byte

## 4 Electrical Specifications

The following sections describe the electrical characteristics of PD69208M and PD69200 devices.

### 4.1 PD69200 Electrical Characteristics and Features

In this application, PD69200 consumption is ~20 mA.

- Manufacturer: NXP
- Manufacturer part number: MKL15Z128VFM4
- Maximum pull-ups consumption based on PD69200 application is 2 mA. See the hardware application note (Catalog Number: PD69208\_AN\_211).

**Table 6 • PD69200 Features Description**

| Features   | Description   |
|--|---|
| Supports up to 12 PoE devices: 96 physical ports (48 logical)    | Up to 12 PoE devices can be cascaded, fitting into a 96-physical-port PoE system that uses one PoE controller (PD69200). PD69200 can support up to 48 logical ports. A logical port can be built from 2× physical ports or 1× physical port.  |
| Power management   | The system supports three power management modes: Class (LLDP), Dynamic, and Static.  |
| Threshold configuration  | Over-voltage and under-voltage thresholds can be configured for disconnection purposes.   |
| Fast PoE   | Ability of a system to quickly boot and power-up ports without loading EEPROM firmware.   |
| Perpetual PoE  | Ability of a PoE system to maintain PoE power while switch host firmware is being loaded.   |
| High-power ports, 2-pair or 4-pair                               | PoE devices can be configured (both hardware and software) to enable higher current through ports (up to ~627 mA) or double power at the RJ in case of 4 pairs.   |
| Communication  | Supports both I <sup>2</sup> C and UART interfaces with host CPU.   |
| Legacy (reduced capacitance) detection                           | Enables detection and powering of pre-standard devices (PDs) up to 30 uF.   |
| LED stream   | Provides a direct SPI interface to an external LED stream circuitry. Enables designers to implement a simple LED circuit that does not require a software code. LED stream clock frequency is 1 MHz.  |
| System OK indication   | Provides a digital output pin to host. System validity indication, when system OK pin state is low. This output behavior is controlled by software mask register settings (Mask 0×28). The mask default settings is 0, meaning that this pin indicates valid software and V <sub>MAIN</sub> is in range. This pin is active low.<br><br>For more information, see the Serial Communication Protocol User Guide document (Catalog Number: PD69200_UG_COMM_PROT). |
| System and port measurements                                     | Measurements of the following parameters: Current (mA), Power Consumption (W), V <sub>MAIN</sub> (V), Port Voltage (V), and PD Class (0–4).   |
| Detailed port status   | Port statuses are received from PoE managers. Statuses such as port on and port off due to disconnection or due to overload.  |
| Interrupt pin  | Interrupt out from PoE controller (PD69200) indicating events such as: port on, port off, port fault, PoE device fault, voltage out of range, and more. For a full list of interrupt events, see the Serial Communication Protocol User Guide document (Catalog Number: PD69200_UG_COMM_PROT).  |
| Port power limit   | Configurable port power limit; when a port exceeds the limit, it is automatically disconnected.   |
| Port matrix control  | Enables layout designers to connect all physical ports to logical ports as required.  |
| "Power Good" interrupt from power supply directly to POE drivers | For systems comprising more than a single power supply, when one power supply fails, a fast port disconnection mechanism is executed to maintain operation and prevent collapse of other power supplies.  |

## 4.2 PD69208M Electrical Characteristics

Unless otherwise specified under conditions, the Min and Max ratings stated in the following table apply to the entire specified operating ratings of the device. Typ values stated are either by design or by production testing at 25 °C ambient.

### 4.2.1 Electrical Characteristics

**Table 7 • Electrical Characteristics**

| Symbol                 | Parameter                                  | Conditions  | Min   | Typ   | Max   | Units |
|------------------------|--|---|-------|-------|-------|-------|
| V <sub>MAIN</sub>      | Main supply voltage                        | Supports Full IEEE802.3 AF and AT functionality                       | 32    |       | 57    | V     |
| V <sub>PORT</sub>      | Port output                                | V <sub>MAIN</sub> – V <sub>PORT_NEGx</sub>                            | 0     |       | 57    | V     |
| V <sub>TH</sub>        | POR threshold                              | Internal or External 3.3 V supply                                     |       | 8     |       | V     |
| I <sub>MAIN</sub>      |  | Main power supply current at operating mode. V <sub>MAIN</sub> = 55 V |       | 14    |       | mA    |
| V <sub>AUX5</sub>      | 5 V output voltage                         | V <sub>AUX5</sub> –AGND   | 4.5   | 5     | 5.5   | V     |
| V <sub>AUX3P3</sub>    | 3.3 V output voltage                       | V <sub>AUX3P3</sub> –AGND   | 3     | 3.3   | 3.6   | V     |
| I <sub>AUX3P3</sub>    | 3.3 V output current for application use   | Without external NPN  |       |       | 5     | mA    |
|                        |  | With external NPN transistor on V <sub>AUX5</sub>                     |       |       | 30    | mA    |
| V <sub>AUX3P3_IN</sub> | 3.3 V input voltage                        | V <sub>AUX3P3</sub> –AGND   | 3     | 3.3   | 3.6   | V     |
| DV <sub>DD</sub>       | Digital 3.3 V input voltage                | DV <sub>DD</sub> –DGND  | 3     | 3.3   | 3.6   | V     |
| POR <sub>TP</sub>      | Power-on reset DV <sub>DD</sub> trip point | DV <sub>DD</sub> –DGND  | 2.575 | 2.775 | 2.975 | V     |
| POR <sub>HYS</sub>     | Power-on reset DV <sub>DD</sub> hysteresis | POR <sub>TP</sub> –DGND   | 0.2   | 0.25  | 0.3   | V     |
| R <sub>CH_ON</sub>     | Total channel resistance                   | R <sub>ds_on</sub> + R <sub>sense</sub> + R <sub>bonding</sub>        |       | 0.34  |       | Ω     |



## 4.2.2 Detection

**Table 8 • PD69208M Detection**

| Symbol          | Parameter                                   | Conditions   | Min  | Typ | Max | Units            |
|-----------------|---|--|------|-----|-----|------------------|
| $V_{OC}$        | Pre-detection voltage, open circuit voltage | $V_{MAIN} - V_{PORT\_NEGx}$ , open port  |      |     | 7.8 | V                |
| $V_{VALID}$     | Detection voltage                           | $V_{MAIN} - V_{PORT\_NEGx}$ , for IEEE802.3 compliant signature resistance ( $R_{SIG} < 33\text{ K}$ ) |      |     | 9.3 | V                |
| $I_{SC}$        | Short circuit current                       | $V_{MAIN} - V_{PORT\_NEGx} = 0\text{ V}$   |      | 388 | 408 | $\mu\text{A}$    |
| $R_{SIG\_LOW}$  | Minimum valid detection resistance          |  | 15   |     | 19  | $\text{K}\Omega$ |
| $R_{SIG\_HIGH}$ | Maximum valid detection resistance          |  | 26.5 |     | 33  | $\text{K}\Omega$ |

## 4.2.3 Classification

**Table 9 • PD69208M Classification**

| Symbol           | Parameter                         | Conditions   | Min  | Typ | Max  | Units |
|------------------|-----------------------------------|--|------|-----|------|-------|
| $V_{CLASS}$      | Class event output voltage        | $V_{MAIN} - V_{PORT\_NEGx}$ ; $0\text{ mA} \leq I_{PORT} \leq 50\text{ mA}$  | 15.5 | 18  | 20.5 | V     |
| $V_{MARK}$       | Mark event output voltage         | $V_{MAIN} - V_{PORT\_NEGx}$ ; $0.1\text{ mA} \leq I_{PORT} \leq 5\text{ mA}$ | 7    | 8.5 | 10   | V     |
| $I_{CLASS\_LIM}$ | Class event current limitation    | $V_{MAIN} - V_{PORT\_NEGx} = 0\text{ V}$                                     | 51   | 70  | 100  | mA    |
| $I_{MARK\_LIM}$  | Mark event current limitation     | $V_{MAIN} - V_{PORT\_NEGx} = 0\text{ V}$                                     | 51   | 70  | 100  | mA    |
|                  | Classification current thresholds | Class 0  | 0    |     | 5    | mA    |
|                  |                                   | Class 1  | 8    |     | 13   | mA    |
|                  |                                   | Class 2  | 16   |     | 21   | mA    |
|                  |                                   | Class 3  | 25   |     | 31   | mA    |
|                  |                                   | Class 4  | 35   |     | 45   | mA    |
|                  |                                   | Class error  | 51   |     | 100  | mA    |

#### 4.2.4 Port Real Time Protection

**Table 10 • PD69208M Port Real Time Protection**

| Symbol              | Parameter                                      | Conditions   | Min | Typ | Max | Units |
|---------------------|--|--|-----|-----|-----|-------|
| T <sub>RISE</sub>   | Turn on rise time                              | From 10% to 90% of the voltage difference at the V <sub>PORT_NEGx</sub> in POWER_ON state from the beginning of POWER_UP | 15  |     |     | μs    |
| I <sub>INRUSH</sub> | Output current in POWER_UP state               | C <sub>LOAD</sub> ≤ 180 μF <sup>1</sup>  | 400 | 425 | 450 | mA    |
| T <sub>INRUSH</sub> | Inrush time                                    |  |     |     | 65  | ms    |
| I <sub>PORT</sub>   | Output operating current                       | 802.3af  | 10  |     | 360 | mA    |
|                     |  | 802.3at  | 10  |     | 620 | mA    |
|                     |  | 802.3bt class 5  | 10  |     | 560 | mA    |
|                     |  | 802.3bt class 6  | 10  |     | 692 | mA    |
| I <sub>CUT</sub>    | Overload current                               | 802.3af  |     | 375 |     | mA    |
|                     |  | 802.3at  |     | 645 |     | mA    |
|                     |  | 802.3bt class 5  |     | 589 |     | mA    |
|                     |  | 802.3bt class 6  |     | 709 |     | mA    |
| T <sub>CUT</sub>    | Overload time limit                            |  | 62  | 64  | 66  | ms    |
| I <sub>LIM</sub>    | Port current limit                             | 802.3af  | 400 | 425 | 450 | mA    |
|                     |  | 802.3bt class 1–3  | 670 | 720 | 770 | mA    |
|                     |  | 802.3at, 802.3bt class 4–6   | 790 | 850 | 892 | mA    |
| T <sub>LIM</sub>    | Port current limit time                        | V <sub>MAIN</sub> – V <sub>PORT_NEGx</sub> < 30 V  | 1   | 2   | 3   | ms    |
| P <sub>PWR</sub>    | Port power accuracy                            | > 90 W   |     |     | 2   | %     |
| I <sub>UDL</sub>    | DC disconnect                                  | 2 Pairs  | 6   | 7.5 | 9   | mA    |
|                     | Under-load current                             | 4 Pairs (for each pair-set)  | 2   | 2.5 | 3   | mA    |
| T <sub>MPDO</sub>   | PD maintain power signature dropout time limit |  | 322 | 324 | 326 | ms    |
| T <sub>MPS</sub>    | PD maintain power                              | 802.3bt PSE type 1, 2  | 46  | 48  | 50  | ms    |
|                     | Signature time for validity                    | 802.3bt PSE type 3, 4  | 3   | 4   | 5   | ms    |
| T <sub>OFF</sub>    | Turn off time                                  | From V <sub>MAIN</sub> to 2.8 V  |     |     | 500 | ms    |

1. Can be overridden by communication command.

## 4.2.5 Port Current Monitoring

**Table 11 • PD69208M Port Current Monitoring**

| Symbol             | Conditions  | Typ    | Max | Units         |
|--------------------|---|--------|-----|---------------|
| Resolution         | Reported as 14 bits                               | 10     |     | Bits          |
| LSB                |   | 122.07 |     | $\mu\text{A}$ |
| Measurement period |   | 16     |     | ms            |
| Accuracy           | $50\text{ mA} < I_{\text{PORT}} < 150\text{ mA}$  |        | 9   | %             |
|                    | $150\text{ mA} < I_{\text{PORT}} < 350\text{ mA}$ |        | 4.5 | %             |
|                    | $350\text{ mA} < I_{\text{PORT}} < 600\text{ mA}$ |        | 3.5 | %             |
|                    | $I_{\text{PORT}} > 600\text{ mA}$                 |        | 3.0 | %             |

## 4.2.6 Port Voltage Monitoring

**Table 12 • Port Voltage Monitoring**

| Symbol             | Typ  | Max | Units |
|--------------------|------|-----|-------|
| Resolution         | 10   |     | Bits  |
| LSB                | 58.6 |     | mV    |
| Measurement period | 3    |     | ms    |
| Accuracy           |      | 3.3 | %     |

## 4.2.7 Main Voltage Monitoring

**Table 13 • PD69208M Main Voltage Monitoring**

| Symbol             | Conditions                                      | Typ  | Max | Units |
|--------------------|---|------|-----|-------|
| Resolution         |   | 10   |     | Bits  |
| LSB                |   | 58.6 |     | mV    |
| Measurement period |   | 3    |     | ms    |
| Accuracy           | $42\text{ V} < V_{\text{MAIN}} < 50\text{ V}$   |      | 2.1 | %     |
|                    | $50\text{ V} < V_{\text{MAIN}} < 57\text{ V}$   |      | 1.5 | %     |
|                    | $50\text{ V} < V_{\text{MAIN}} < 57\text{ V}^1$ |      | 0.6 | %     |

1. 0–70 °C

## 4.2.8 Temperature Monitoring

**Table 14 • PD69208M Temperature Monitoring**

| Symbol             | Conditions                          | Min | Typ    | Max | Units |
|--------------------|-------------------------------------|-----|--------|-----|-------|
| Resolution         |                                     |     | 8      |     | Bits  |
| LSB                | Temperature = (DATA x 1.9384) – 273 |     | 1.9384 |     | °C    |
| Measurement period |                                     |     | 3      |     | ms    |
| Accuracy           |                                     | -3  |        | 3   | °C    |

## 4.2.9 Digital Interface

**Table 15 • PD69208M Digital Interface**

| Symbol          | Parameter                      | Conditions   | Min | Typ | Max | Units |
|-----------------|--------------------------------|--|-----|-----|-----|-------|
| V <sub>IH</sub> | Input logic high voltage       | RESET_N, MOSI, MISO, SCK, CS_N, PGD[0..3], ADDR[0..3]                                | 2.2 |     |     | V     |
| V <sub>IL</sub> | Input logic low voltage        | RESET_N, MOSI, MISO, SCK, CS_N, PGD[0..3], ADDR[0..3]                                |     |     | 0.8 | V     |
| Hyst            | Input logic hysteresis voltage | RESET_N, MOSI, MISO, SCK, CS_N, PGD[0..3], ADDR[0..3]                                | 0.4 | 0.6 | 0.8 | V     |
| I <sub>IH</sub> | Input logic high current       | RESET_N, MOSI, MISO, SCK, CS_N, PGD[0..3], ADDR[0..3]                                | -10 |     | 10  | μA    |
| I <sub>IL</sub> | Input logic low current        | RESET_N, MOSI, MISO, SCK, CS_N, PGD[0..3], ADDR[0..3]                                | -10 |     | 10  | μA    |
| V <sub>OH</sub> | Output logic high voltage      | RESET_N, MOSI, MISO, SCK, CS_N, PGD[0..3], ADDR[0..3]<br><br>I <sub>OH</sub> = -1 mA | 2.4 |     |     | V     |
| V <sub>OL</sub> | Output logic low voltage       | RESET_N, MOSI, MISO, SCK, CS_N, PGD[0..3], ADDR[0..3]<br><br>I <sub>OH</sub> = 1 mA  |     |     | 0.4 | V     |

## 4.2.10 Immunity

**Table 16 • PD69208M Immunity**

| Symbol | Parameter                    | Conditions       | Min | Typ | Max | Units |
|--------|------------------------------|------------------|-----|-----|-----|-------|
| ESD    | ESD rating                   | HBM <sup>1</sup> |     |     |     |       |
|        |                              | CDM <sup>2</sup> |     |     |     |       |
| Surge  | Lightning surge <sup>3</sup> | EN61000 4-5      | -1  |     | 1   | KV    |

1. ESD HBM complies with JESD22 Class 2 standard.
2. ESD CDM complies with JESD22 Class 1 standard.
3. System-level common mode 10/700 μs according to IEC61000-4-5.

### 4.3 Absolute Maximum Ratings

PoE performance is not guaranteed when exceeding the recommended rating. Exposure to any stress in the range between the recommended rating, as listed in the following table, and the absolute maximum rating should be limited to a short time. Exceeding these ratings may impact long-term operating reliability.

**Table 17 • Absolute Maximum Ratings**

| Parameters  | Min  | Max                        | Units |
|---|------|----------------------------|-------|
| Supply input voltage ( $V_{MAIN}$ ) <sup>1, 2</sup>                     | -0.3 | 72                         | V     |
| PORT_NEG[0.7] pins  | -0.3 | $V_{MAIN} + 0.5$           | V     |
| $V_{AUX5}$  | -0.3 | 6                          | V     |
| $V_{AUX3P3}$ , $D_{VDD}$  | -0.3 | 4                          | V     |
| Digital pins: MISO, MOSI, SCK, CS_N, ADDR[3:0], PGD[3:0], RESET_N, TRIM | -0.3 | $D_{VDD} + 0.3$ and $<4.0$ | V     |
| Junction temperature  |      | 150                        | °C    |
| Lead soldering temperature (40 s, reflow)                               |      | 260                        | °C    |
| Storage temperature   | -65  | 150                        | °C    |

1. Power Sequence Requirement:  $V_{MAIN} > V_{AUX5} > V_{AUX3P3} = T_{TRIM}$ ,  $D_{VDD}$ .
2. PD69208M EPAD is connected by copper plane on PCB to AGND. AGND is ground for IC.

**Note:** DRV\_VAUX5 and IREF are output pins and should not apply voltage or current. DRV\_VAUX5 can be left open when not used.


## 5 Pin Descriptions

The PD69200 device has 32 pins and PD69208M device has 56 pins, which are described in this section.

### 5.1 Pin Configuration and Pinout

The following figures represent the top and bottom view of PD69200 and PD69208M devices.


**Figure 4 • PD69200 Pin Diagram**

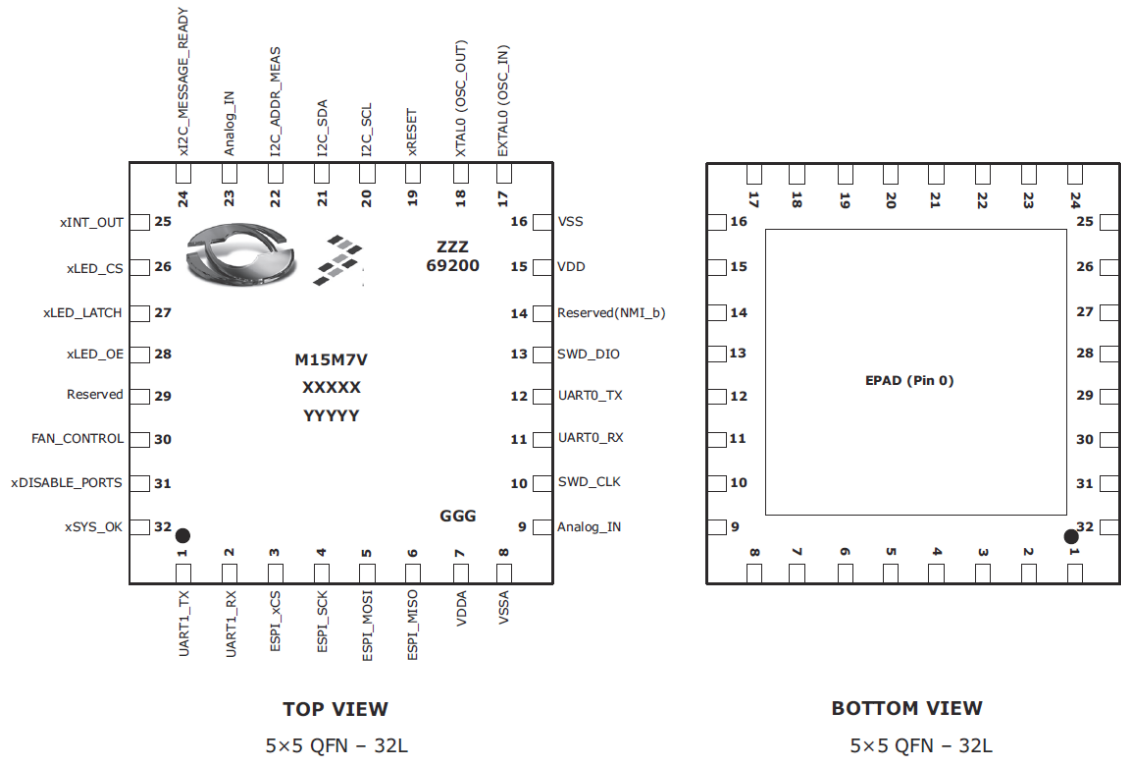

**Note:** The marking position of PD69200 may change subject to NXP practice.

**Note:** For definitions about markings in the PD69200 pinout diagram, see the [Ordering Information \(see page 46\)](#) table.

Figure 5 • PD69208M Pin Diagram

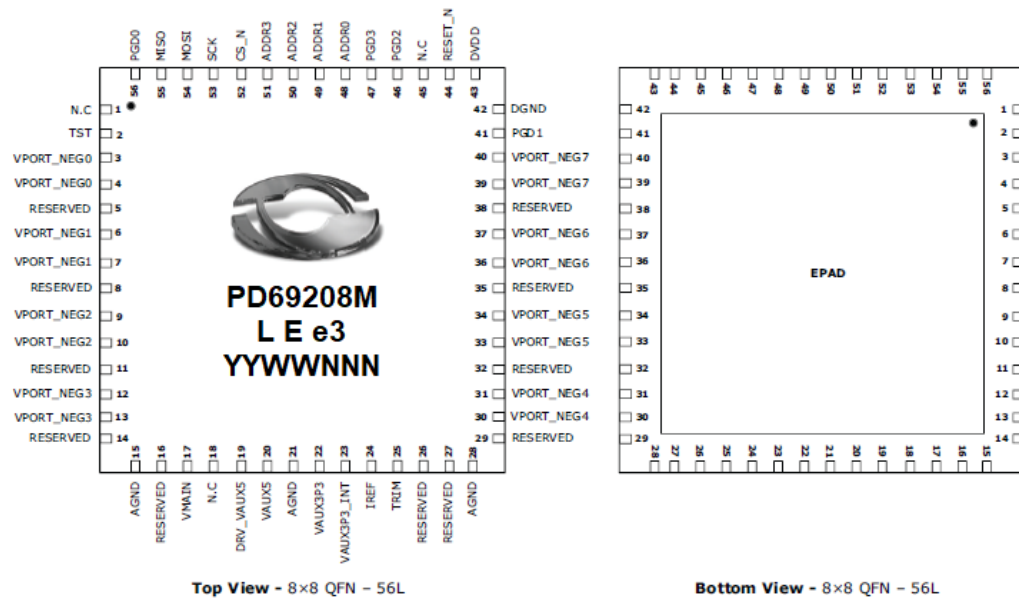

**Note:** For definitions about markings in the PD69208M pinout diagram, see the [Ordering Information](#) (see page 46) table.

## 5.2 PD69200 and PD69208M Pin Descriptions

The following sections describe the functional pin descriptions of PD69200 and PD69208M devices.

### 5.2.1 PD69200 Pin Descriptions

The following table lists the functional pin descriptions of the PD69200 device.

**Table 18 • PD69200 Pin Description**

| Number | Designation                  | Type       | Description  |
|--------|------------------------------|------------|--|
|        | EPAD                         | Thermal    | Isolated Thermal PAD, recommended to tie to GND.   |
| 1      | UART1_TX <sup>1</sup>        | OUT        | Reserved UART.   |
| 2      | UART1_RX <sup>1</sup>        | IN         | Reserved UART.   |
| 3      | ESPI_xCS                     | OUT        | ESPI Bus to PoE Manager. SPI chip select (Active Low). CS is asserted during all SPI frame.  |
| 4      | ESPI_SCK                     | OUT        | ESPI Bus to PoE Manager. SPI clock output to PD6920x, and LED stream clock output, set to 1 MHz.   |
| 5      | ESPI_MOSI                    | OUT        | SPI packets are transmitted on this line.  |
| 6      | ESPI_MISO                    | IN         | ESPI Bus to PoE Manager. SPI Master In Slave Out. SPI packets are received on this line.   |
| 7      | VDDA                         | Supply     | Main Supply 3.3 V.   |
| 8      | VSSA                         | GND        | Analog ground.   |
| 9      | Analog_IN                    | Analog_IN  | Analog input. Should be connected to 3.3 V.  |
| 10     | SWD_CLK                      | DEBUG      | Serial Debug Data Bus Clock.   |
| 11     | UART0_RX <sup>1</sup>        | IN         | <p>UART receive from host. 15-byte protocol commands are received on this line. The baud rate is set to 19,200 bps.</p> <p>For more information, see the Serial Communication Protocol User Guide (Catalog Number: PD69200_UG_COMM_PROT).</p>          |
| 12     | UART0_TX <sup>1</sup>        | OUT        | <p>UART transmit to host. 15-byte protocol reply/telemetry are transmitted on this line. The baud rate is set to 19,200 bps.</p> <p>For more information, see the Serial Communication Protocol User Guide (Catalog Number: PD69200_UG_COMM_PROT).</p> |
| 13     | SWD_DIO                      | DEBUG      | Serial Debug Data Bus.   |
| 14     | Reserved (NMI_b)             | IRQ_Input  | Spare, an external pull-up must be connected.  |
| 15     | VDD                          | Supply     | Main Supply 3.3 V.   |
| 16     | VSS                          | GND        | Digital ground.  |
| 17     | EXTAL0 (OSC_IN) <sup>2</sup> | Oscillator | Oscillator input - Reserved.   |
| 18     | XTAL0 (OSC_OUT) <sup>2</sup> | Oscillator | Oscillator output - Reserved.  |



| Number | Designation                     | Type      | Description   |
|--------|---------------------------------|-----------|---|
| 19     | xRESET <sup>(3,4)</sup>         | IN/OUT    | <p>Host Reset input (Active Low). The shortest reset pulse from the host that is required for the PD69200 application is 150 <math>\mu</math>s. PD69200 can generate self-reset. In this case, the xRESET pin is driven low by the PD69200 for about 100 <math>\mu</math>s. It is recommended to connect this pin to a host open drain output with 10 K<math>\Omega</math> pull-up. An 47 nF filter capacitor should be connected between this pin to GND, close to the PD69200 device. If this pin is connected to a push/pull driver, a serial resistor of 1.5 K<math>\Omega</math> must be connected instead of the pull-up. The required shortest reset pulse in this case is 300 <math>\mu</math>s.</p> <p>For more information about this pin connectivity, see the Hardware Application Note (Catalog Number: PD69208_AN_211).</p> |
| 20     | I2C0_SCL <sup>4</sup>           | IN/OUT    | I <sup>2</sup> C clock from the host master. Speed is limited to 400 KHz and clock stretching functionality must be implemented in the host master. If PD69200 is busy, it holds the clock line.  |
| 21     | I2C0_SDA <sup>4</sup>           | IN/OUT    | <p>I<sup>2</sup>C bidirectional data. 15-byte protocol messages are transmitted on this line.</p> <p>For more information, see the Serial Communication Protocol User Guide document (Catalog Number: PD69200_UG_COMM_PROT).</p>  |
| 22     | I2C_ADDR_MEAS                   | Analog_IN | I <sup>2</sup> C address of PD69200. Analog input to determine I <sup>2</sup> C address or UART operation. See I <sup>2</sup> C address selection in table <a href="#">I2C Address Selection (see page 10)</a> .  |
| 23     | Analog_IN                       | Analog_IN | Reserved analog input. connect to GND.  |
| 24     | xI2C_MESSAGE_READY <sup>3</sup> | OUT       | <p>I<sup>2</sup>C message ready for read by the host. PD69200 asserts this line low when it has an answer to the host. Therefore, the host can poll this line and initiate I2C read cycle only when the message is ready. This pin is active low.</p> <p>After the host reads the data from PD69200, this pin is asserted to high.</p>  |
| 25     | xINT_OUT <sup>(3, 4)</sup>      | OUT       | Interrupt output indication. This line is asserted low when a pre-configured event is in progress. The host configures the event that should generate an interrupt through 15 bytes protocol. When this event occurs, the xINT_OUT pin is asserted. This pin is active low.   |
| 26     | xLED_CS <sup>3</sup>            | OUT       | Chip select signal for LED stream. This pin is active low.  |
| 27     | xLED_LATCH <sup>3</sup>         | OUT       | Latch signal for LED stream. This pin is active low.  |
| 28     | xLED_OE <sup>3</sup>            | OUT       | Output enable signal for LED stream. This pin is active low.  |
| 29     | Reserved                        | IN        | Reserved for MPRPD counter for future support. If not used, connect to VDD.   |
| 30     | FAN_CONTROL                     | OUT       | Optional. Fan control operates a fan, when the PD69208M device temperature is above the temperature alarm threshold. This pin is active high.   |
| 31     | xDISABLE_PORTS <sup>3</sup>     | IN        | Disable all PoE ports. When this input is asserted low, the PD69200 device shuts down all of the PoE ports in the system. This pin contains software filter of 480 ms to reject noise and false disable scenarios.  |

| Number | Designation                        | Type | Description  |
|--------|------------------------------------|------|--|
| 32     | xSys_OK/LED System OK <sup>3</sup> | OUT  | <p>System validity indication. When the system is in OK state, the pin state is low. The behavior of this output is controlled by software mask register settings (Mask 0x28). The mask default settings is 0, meaning that this pin indicates valid software, and V<sub>MAIN</sub> is in range. This pin is active low.</p> <p>For more information, see the Serial Communication Protocol User Guide (Catalog Number: PD69200_UG_COMM_PROT).</p> |

1. A weak pull-up is recommended. See Hardware Application Note: PD69208\_AN\_240.
2. The oscillator pins are reserved and unused. The MCU uses internal clock source set to 47.972 MHz  $\pm 1.5\%$  (max).
3. The initial x indicates that the pin is active low.
4. Open drain output requires an external pull-up. See Hardware Application Note: PD69208\_AN\_211.

**Note:** All I/Os in this application can sink or source 3 mA maximum.

## 5.2.2 PD69208M Pin Descriptions

The following sections describe the functional pin descriptions of PD69208M devices.

**Table 19 • PD69208M Pin Description**

| Number | Designator              | Type          | Description   |
|--------|-------------------------|---------------|---|
|        | EPAD                    |               | Exposed PAD: Connect to analog ground. A decent ground plane should be deployed around this pin as required.<br><br>See the PD69208 Layout Design Guidelines in the hardware application note (Catalog Number: PD69208_AN_211).   |
| 1      | N.C                     | N/A           | Not connected. Do not connect externally (leave floating).  |
| 2      | TST                     | Digital Input | Test pin for production use only. Keep connected to DGND.   |
| 3      | VPORT_NEG0              | Analog I/O    | Negative port 0 output.   |
| 4      | VPORT_NEG0              | Analog I/O    | Negative port 0 output.   |
| 5      | RESERVED                | N/A           | Reserved pin. Do not connect externally.  |
| 6      | VPORT_NEG1              | Analog I/O    | Negative port 1 output.   |
| 7      | VPORT_NEG1              | Analog I/O    | Negative port 1 output.   |
| 8      | RESERVED                | N/A           | Reserved pin. Do not connect externally.  |
| 9      | VPORT_NEG2              | Analog I/O    | Negative port 2 output.   |
| 10     | VPORT_NEG2              | Analog I/O    | Negative port 2 output.   |
| 11     | RESERVED                | N/A           | Reserved pin. Do not connect externally.  |
| 12     | VPORT_NEG3              | Analog I/O    | Negative port 3 output.   |
| 13     | VPORT_NEG3              | Analog I/O    | Negative port 3 output.   |
| 14     | RESERVED                | N/A           | Reserved pin. Do not connect externally.  |
| 15     | AGND                    | Power         | Analog ground.  |
| 16     | RESERVED                | N/A           | Reserved pin. Do not connect externally.  |
| 17     | V <sub>MAIN</sub>       | Power         | Main high-voltage supply voltage. A low ESR 1 $\mu$ F (or higher) bypass capacitor, connected to AGND, should be placed as close as possible to this pin through low-resistance traces.   |
| 18     | N.C                     | N/A           | Not connected. Do not connect externally.   |
| 19     | DRV_VAUX5               | Power         | Driven outputs for 5 V external regulation; if internal regulation is used, connect to pin 20. If an external NPN is used to regulate the voltage, connect this pin to Base. If an NPN is used, a 4.7 $\mu$ F capacitor should be connected between this pin and AGND.        |
| 20     | VAUX5                   | Power         | Regulated 5 V output voltage source. A 4.7 $\mu$ F or higher filtering capacitor should be connected between this pin and AGND. If an external NPN is used to regulate the voltage, connect this pin to the emitter. The collector should be connected to V <sub>MAIN</sub> . |
| 21     | AGND                    | Power         | Analog ground.  |
| 22     | V <sub>AUX3P3</sub>     | Power         | Regulated 3.3 V output voltage source. A 4.7 $\mu$ F or higher filtering capacitor should be connected between this pin and AGND. When an external 3.3 V regulator is used, connect it to this pin to supply the chip.  |
| 23     | V <sub>AUX3P3_INT</sub> | Power         | Connected to V <sub>AUX3P3</sub> (pin 22) if internal 3.3 V regulator is used. Leave unconnected (Floating) if external 3.3 V regulator is used.  |
| 24     | I <sub>REF</sub>        | Analog Input  | Reference resistor pin. Connect a 28.7 k $\Omega$ 1% resistor to AGND.  |

| Number | Designator       | Type           | Description   |
|--------|------------------|----------------|---|
| 25     | TRIM             | Test Input     | Test Input pin; Keep connected to $V_{AUX3P3}$ .  |
| 26     | RESERVED         | N/A            | Reserved pin. Do not connect externally.  |
| 27     | RESERVED         | N/A            | Reserved pin. Do not connect externally.  |
| 28     | AGND             | Power          | Analog ground.  |
| 29     | RESERVED         | N/A            | Reserved pin. Do not connect externally.  |
| 30     | VPORT_NEG4       | Analog I/O     | Negative port 4 output.   |
| 31     | VPORT_NEG4       | Analog I/O     | Negative port 4 output.   |
| 32     | RESERVED         | N/A            | Reserved pin. Do not connect externally.  |
| 33     | VPORT_NEG5       | Analog I/O     | Negative port 5 output.   |
| 34     | VPORT_NEG5       | Analog I/O     | Negative port 5 output.   |
| 35     | RESERVED         | N/A            | Reserved pin. Do not connect externally.  |
| 36     | VPORT_NEG6       | Analog I/O     | Negative port 6 output.   |
| 37     | VPORT_NEG6       | Analog I/O     | Negative port 6 output.   |
| 38     | RESERVED         | N/A            | Reserved pin. Do not connect externally.  |
| 39     | VPORT_NEG7       | Analog I/O     | Negative port 7 output.   |
| 40     | VPORT_NEG7       | Analog I/O     | Negative port 7 output.   |
| 41     | PGD1             | Digital I/O    | Power good input from the system power supply.  |
| 42     | DGND             | Power          | Digital ground.   |
| 43     | DV <sub>DD</sub> | Power In       | Regulated 3.3 V for digital circuitry. Connect voltage from pin $V_{AUX3P3}$ or from external power supply source if used. A 1 $\mu$ F or higher filtering capacitor should be connected between this pin and DGND. |
| 44     | RESET_N          | Digital Input  | Reset input—active low (0 = reset). An external 10 K pull-up resistor should be connected between this pin and DV <sub>DD</sub> .   |
| 45     | N.C.             | N/A            | Not connected. Do not connect externally.   |
| 46     | PGD2             | Digital Input  | Power good input from the system power supply.  |
| 47     | PGD3             | Digital Input  | Power good input from the system power supply.  |
| 48     | ADDR0            | Digital Input  | SPI address bit 0 to set chip address.  |
| 49     | ADDR1            | Digital Input  | SPI address bit 1 to set chip address.  |
| 50     | ADDR2            | Digital Input  | SPI address bit 2 to set chip address.  |
| 51     | ADDR3            | Digital Input  | SPI address bit 3 to set chip address.  |
| 52     | CS_N             | Digital Input  | SPI bus and chip select.  |
| 53     | SCK              | Digital Input  | SPI bus and serial clock Input.   |
| 54     | MOSI             | Digital Input  | SPI bus and Master Data out/slave in.   |
| 55     | MISO             | Digital Output | SPI bus and Master Data in/slave out.   |
| 56     | PGD0             | Digital Input  | Power good input from the system power supply.  |


## 5.3 Recommended PCB Layouts


This section describes the recommended PCB layouts for the PD69200 and PD69208M devices.

### 5.3.1 PD69200 Recommended PCB Layout for 32-Pin QFN 5 mm x 5 mm

The following figures illustrate the PCB layout pattern for PD69200. Units are in mm.

**Figure 6 • PD69200 Top-Layer Copper PCB Layout**

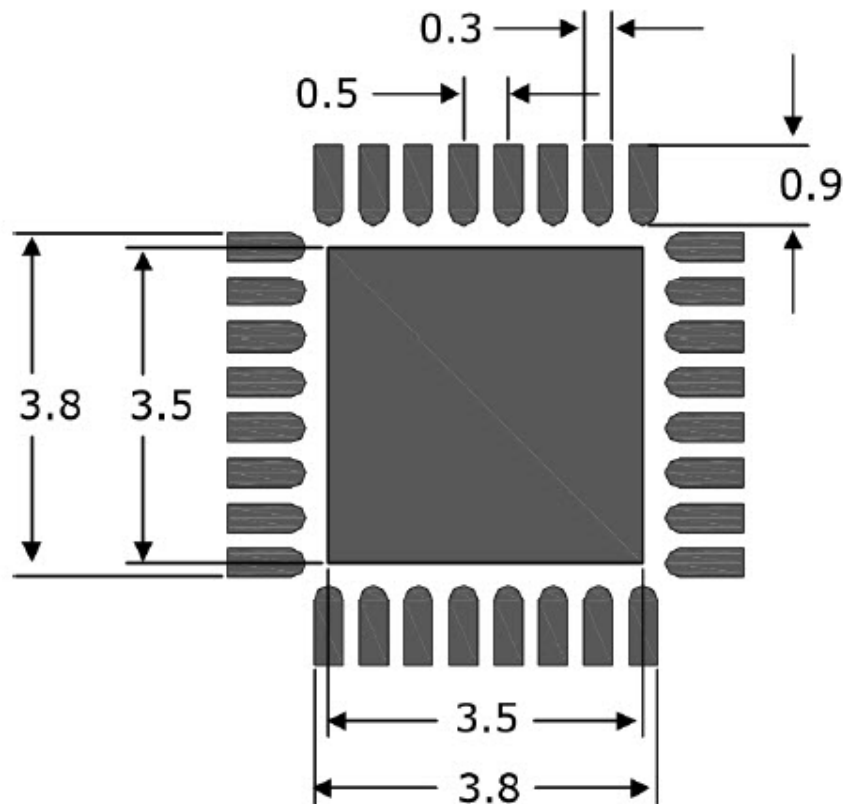


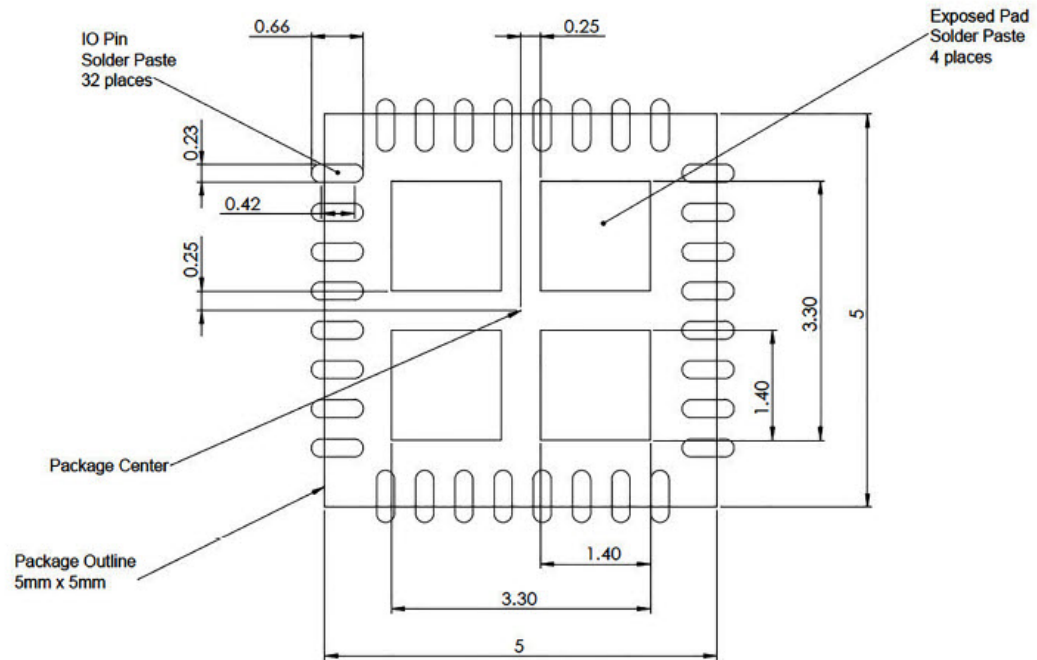
**Figure 7 • PD69200 Top-Layer Solder Paste and Vias PCB Layout for Thermal Pad Array**

### 5.3.2 PD69208M Recommended PCB Layout for 56-Pin QFN 8 mm x 8 mm


The following figures illustrate the PCB layout pattern for PD69208M. Units are in mm.

**Figure 8 • Top Copper Layer**

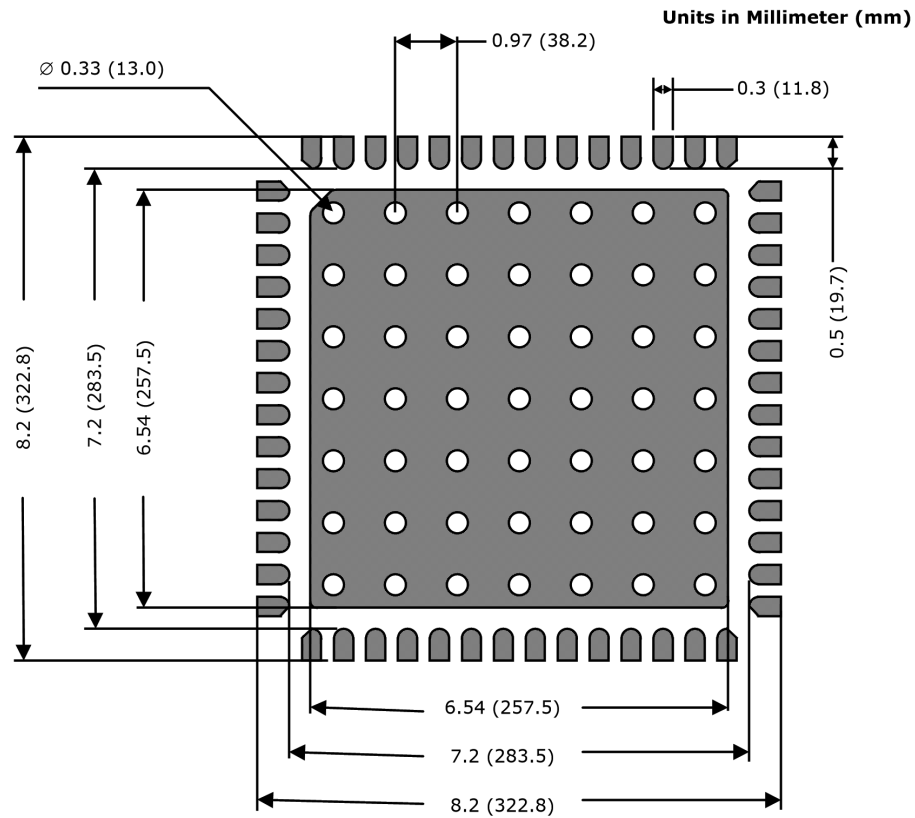

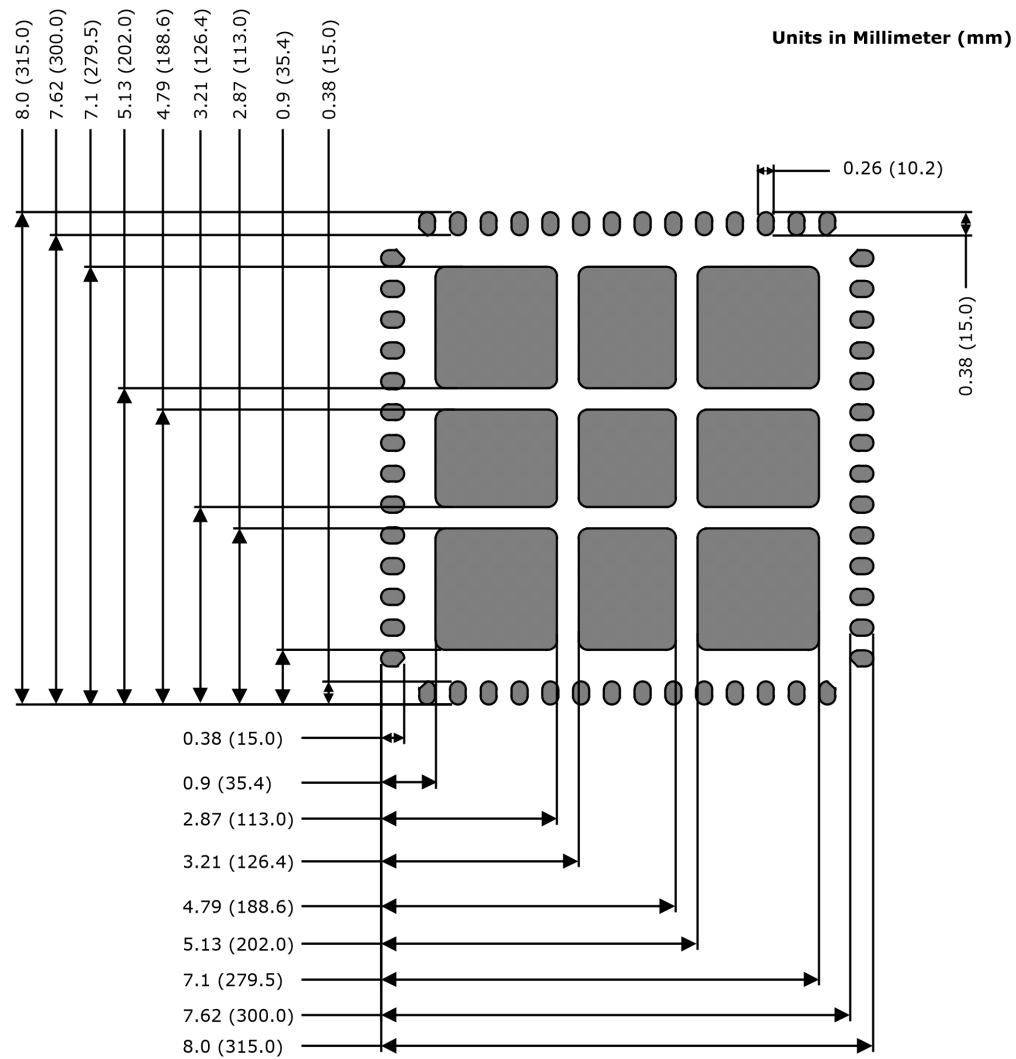**Figure 9 • Top Solder Paste Layer**

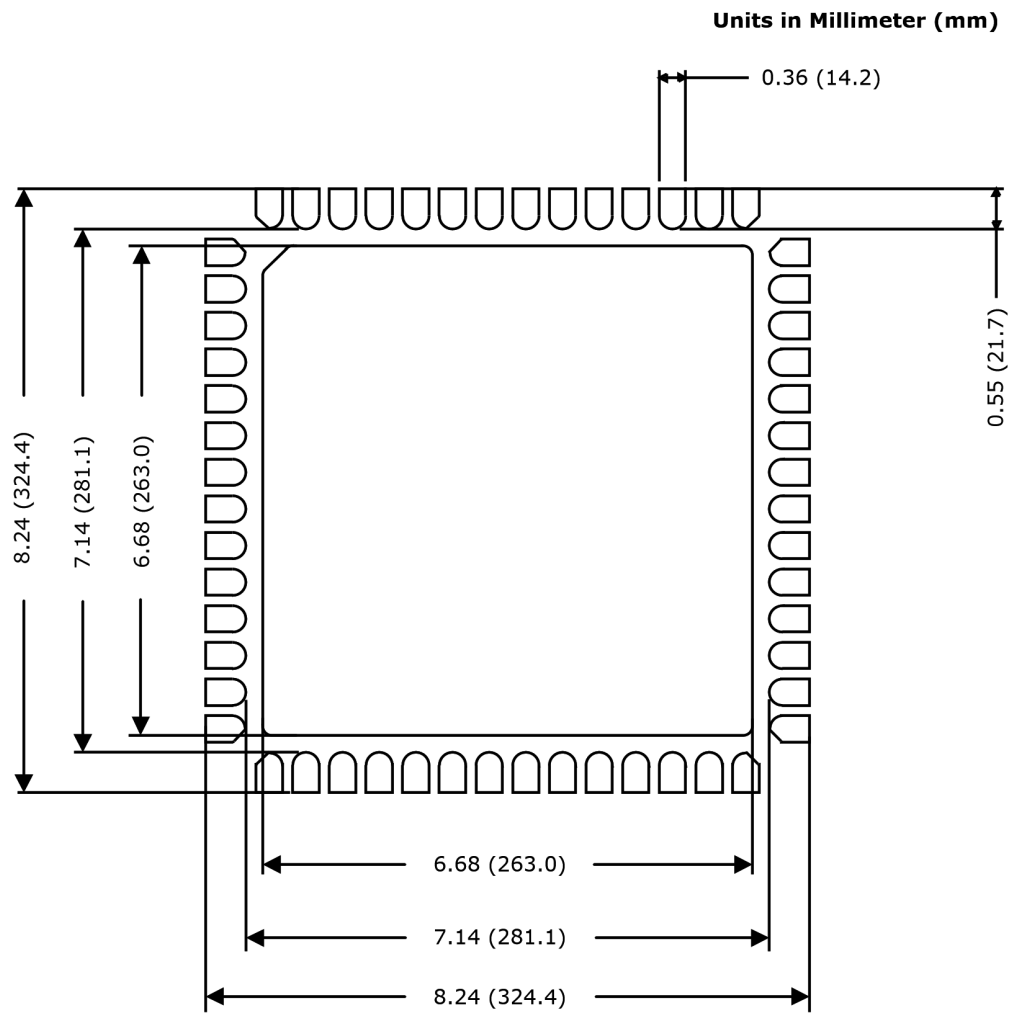

**Figure 10 • Top Layer Mask**


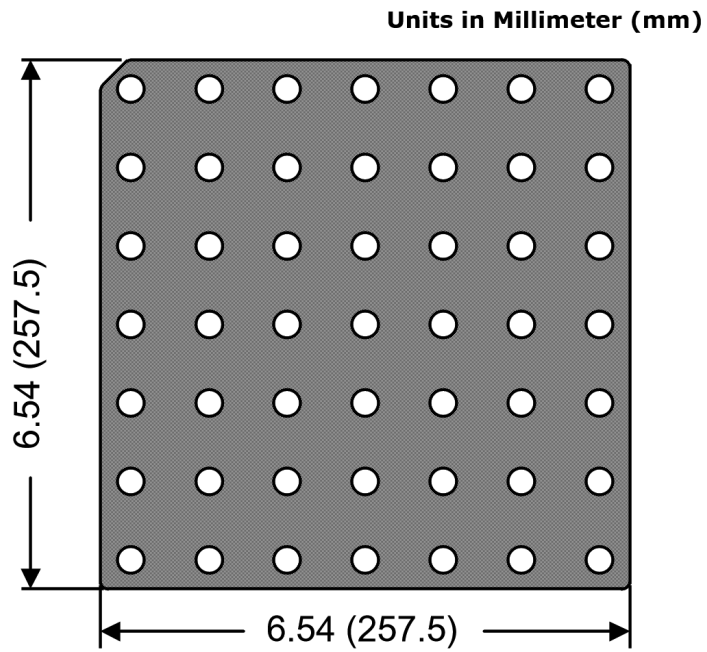
**Figure 11 • BOT and Internal Layers Copper Plane**

Figure 12 • Top Layer Pin Geometry

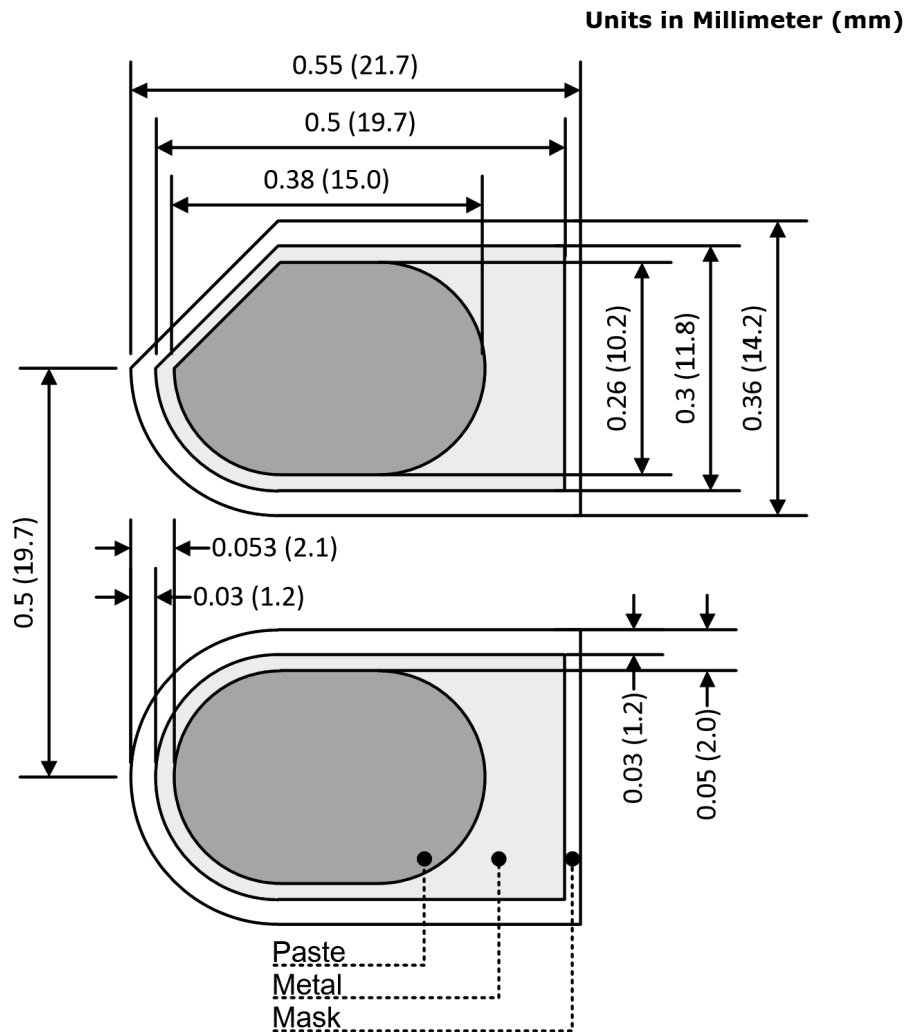


**Note:** The CM has latitude to modify the solder paste stencil for manufacturability reasons. The solder paste stencil shall cover 65% to 80% of the thermal pad and must not allow solder to be applied to the thermal vias under the QFN package using any method deemed appropriate. Any design should be subject to system validation and qualification prior to commitment to mass production of field deployment. Use a 5 mil stencil.

## 6 Package Specification

This section describes the package of PD69200 and PD69208M devices.

**Figure 13 • PD69200 Package Outline Drawing (32-Pin QFN 5 mm x 5 mm)**

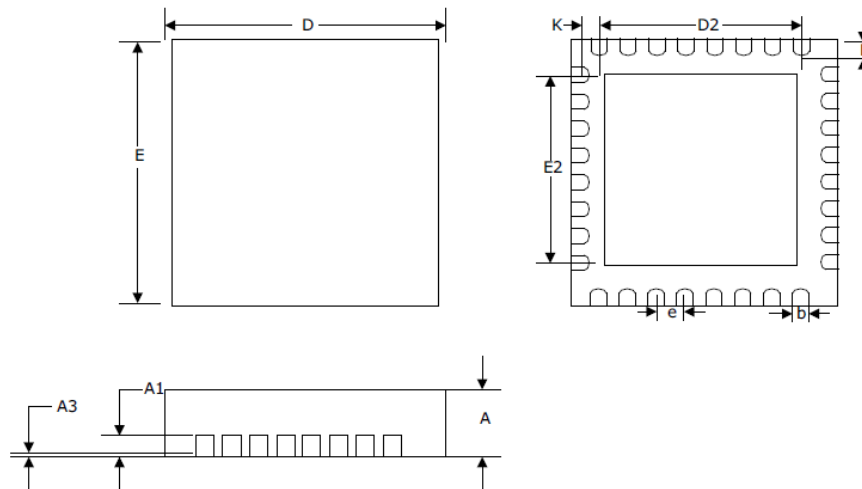

The following table lists the dimensions and measurements of the PD69200 package.


**Table 20 • PD69200 Package Outline Dimensions and Measurements**

| Dimension | Millimeters |      | Inches    |       |
|-----------|-------------|------|-----------|-------|
|           | Min         | Max  | Min       | Max   |
| A         | 0.80        | 1.00 | 0.031     | 0.039 |
| A1        | 0.00        | 0.05 | 0         | 0.002 |
| A3        | 0.20 REF    |      | 0.008 REF |       |
| K         | 0.20 MIN    |      | 0.008 MIN |       |
| e         | 0.50 BSC    |      | 0.02 BSC  |       |
| L         | 0.30        | 0.50 | 0.012     | 0.02  |
| b         | 0.18        | 0.30 | 0.007     | 0.012 |
| D2        | 3.50        | 3.70 | 0.138     | 0.147 |
| E2        | 3.50        | 3.70 | 0.138     | 0.147 |
| D         | 5.00 BSC    |      | 0.197 BSC |       |
| E         | 5.00 BSC    |      | 0.197 BSC |       |

**Note:** Dimensions do not include protrusions; they should not exceed 0.155 mm (.006") on any side. Lead dimension should not include solder coverage. Dimensions are in millimeters and inches for reference.

The following figure illustrates the package drawing of the PD69208M package.

**Figure 14 • PD69208M Package Drawing (56-Pin QFN 8 mm x 8 mm)**

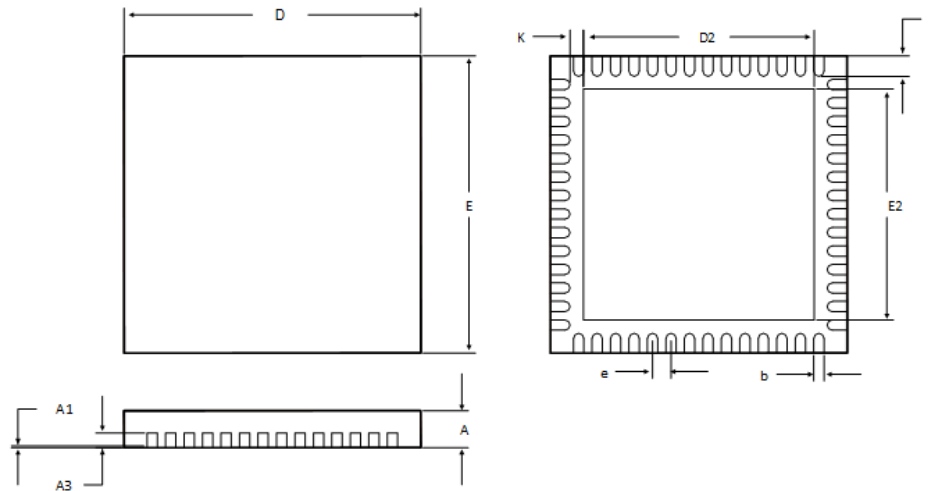

The following table lists the dimensions and measurements of the PD69208M package.

**Table 21 • PD69208M Package Outline Dimensions and Measurements**

| Dimension | Millimeters |      | Inches    |       |
|-----------|-------------|------|-----------|-------|
|           | Min         | Max  | Min       | Max   |
| A         | 0.80        | 1.00 | 0.031     | 0.039 |
| A1        | 0.00        | 0.05 | 0         | 0.002 |
| A3        | 0.20 REF    |      | 0.008 REF |       |
| K         | 0.20 MIN    |      | 0.008 MIN |       |
| e         | 0.50 BSC    |      | 0.02 BSC  |       |
| L         | 0.30        | 0.50 | 0.012     | 0.02  |
| b         | 0.18        | 0.30 | 0.007     | 0.012 |
| D2        | 6.50        | 6.75 | 0.256     | 0.267 |
| E2        | 6.50        | 6.75 | 0.256     | 0.267 |
| D         | 8.00 BSC    |      | 0.315 BSC |       |
| E         | 8.00 BSC    |      | 0.315 BSC |       |

**Note:** Dimensions do not include protrusions; they should not exceed 0.155 mm (0.006") on any side. Lead dimension should not include solder coverage. Dimensions are in millimeters and inches for reference.

## 6.1 Thermal Specifications

The following tables list the thermal specifications of PD69208M and PD69200.

**Table 22 • PD69208M Thermal Specifications**

| Thermal Resistance        | Typ  | Units                       | Notes   |
|---------------------------|------|-----------------------------|---|
| $\theta_{JA}$             | 19.0 | $^{\circ}\text{C}/\text{W}$ | Junction-to-ambient thermal resistance.   |
| $\psi_{JT}$               | 0.05 | $^{\circ}\text{C}/\text{W}$ | Junction-to-top thermal characterization parameter. A thermal metric derived from the difference in junction temperature (TJ) and package top temperature (TT) divided by total heating power (PH). |
| $\theta_{JC(\text{top})}$ | 4.9  | $^{\circ}\text{C}/\text{W}$ | Junction-to-case thermal resistance with heat flow through package top.   |
| $\theta_{JB}$             | 15.2 | $^{\circ}\text{C}/\text{W}$ | Junction-to-board thermal resistance.   |

**Note:** All parameters are as per JEDEC JESD-51.

**Table 23 • PD69200 Thermal Specifications**

| Thermal Resistance        | Typ | Units                       | Notes   |
|---------------------------|-----|-----------------------------|---|
| $\theta_{JA}$             | 33  | $^{\circ}\text{C}/\text{W}$ | Junction-to-ambient thermal resistance.   |
| $\psi_{JT}$               | 8   | $^{\circ}\text{C}/\text{W}$ | Junction-to-top thermal characterization parameter. A thermal metric derived from the difference in junction temperature (TJ) and package top temperature (TT) divided by total heating power (PH). |
| $\theta_{JC(\text{top})}$ | 1.8 | $^{\circ}\text{C}/\text{W}$ | Junction-to-case thermal resistance with heat flow through package top.   |
| $\theta_{JB}$             | 12  | $^{\circ}\text{C}/\text{W}$ | Junction-to-board thermal resistance.   |


## 6.2 Recommended Solder Reflow

- RoHS 6/6
- Pb-free 100% Matte Tin Finish
- Package Peak Temperature for Solder Reflow (40 seconds maximum exposure)—260 °C (+0 °C, -5 °C)

**Table 24 • Classification Reflow Profiles**

| Profile Feature                                  | Sn-Pb Eutectic Assembly | Pb-Free Assembly |
|--|-------------------------|------------------|
| Average ramp-up rate (TS <sub>max</sub> to Tp)   | 3 °C/second max         | 3 °C/second max  |
| <b>Preheat</b>                                   |                         |                  |
| Temperature min (TS <sub>min</sub> )             | 100 °C                  | 150 °C           |
| Temperature max (TS <sub>max</sub> )             | 150 °C                  | 200 °C           |
| Time (tS <sub>min</sub> to tS <sub>max</sub> )   | 60–120 seconds          | 60–180 seconds   |
| <b>Time Maintained</b>                           |                         |                  |
| Temperature (T <sub>L</sub> )                    | 183 °C                  | 217 °C           |
| Time (t <sub>L</sub> )                           | 60–150 seconds          | 60–150 seconds   |
| Peak classification temperature (Tp)             | 210 °C to 235 °C        | 240 °C to 255 °C |
| Time within 5 °C of actual peak temperature (tp) | 10–30 seconds           | 20–40 seconds    |
| Ramp-down rate                                   | 6 °C/second max         | 6 °C/second max  |
| Time 25 °C to peak temperature                   | 6 minutes max           | 8 minutes max    |

**Figure 15 • Classification Reflow Profiles**

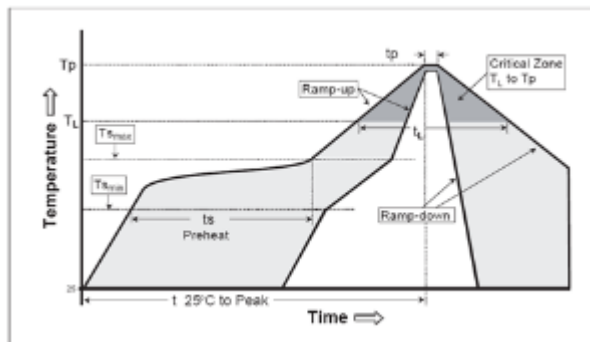

**Table 25 • Pb-Free Process—Package Classification Reflow Temperatures**

| Package Thickness          | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> 350—2000 | Volume mm <sup>3</sup> >2000 |
|----------------------------|-----------------------------|---------------------------------|------------------------------|
| <1.6 mm <sup>1</sup>       | 260 + 0 °C                  | 260 + 0 °C                      | 260 + 0 °C                   |
| 1.6 mm–2.5 mm <sup>1</sup> | 260 + 0 °C                  | 250 + 0 °C                      | 245 + 0 °C                   |
| ≥2.5 mm <sup>1</sup>       | 250 + 0 °C                  | 245 + 0 °C                      | 245 + 0 °C                   |

1. Tolerance: The device manufacturer or supplier should assure process compatibility up to and including the stated classification temperature, meaning that the Peak reflow temperature is +0 °C. For example, 260 °C to 0 °C, at the rated MSL.


**Note:** Exceeding the ratings listed in the preceding table may damage the device.

## 6.3 Tape and Reel

This section describes the tape and reel.

### 6.3.1 PD69200 Tape and Reel Specification

Figure 16 • PD69200 Tape Specification

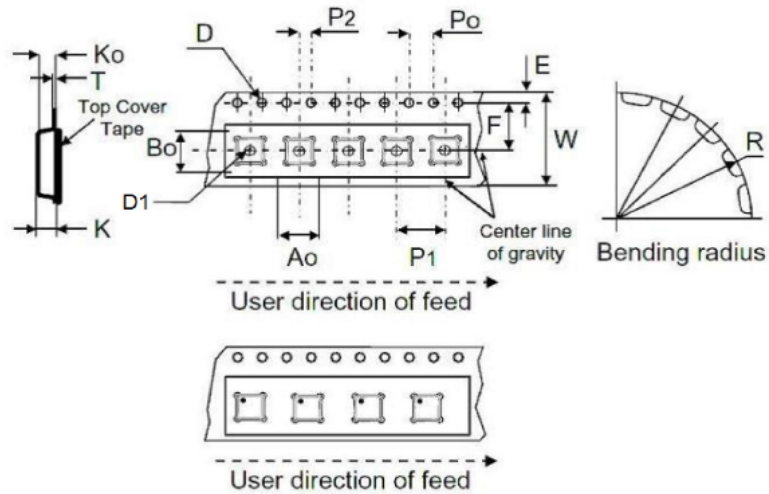


The following table lists the PD69200 tape mechanical data.

Table 26 • PD69200 Tape Mechanical Data

| Dimensions | Value (mm)       | Value (inches)      |
|------------|------------------|---------------------|
| D          | $1.50 \pm 0.1/0$ | $0.059 \pm 0.004/0$ |
| E          | $1.75 \pm 0.1$   | $0.069 \pm 0.004$   |
| P0         | $4.00 \pm 0.1$   | $0.157 \pm 0.004$   |
| T (max)    | $0.3 \pm 0.05$   | $0.0118 \pm 0.003$  |
| D1         | 1.5              | 0.059               |
| F          | $5.5 \pm 0.1$    | $0.216 \pm 0.003$   |
| K (max)    | $1.6 \pm 0.1$    | $0.063 \pm 0.004$   |
| P2         | $2.00 \pm 0.1$   | $0.079 \pm 0.004$   |
| R          | 30               | 1.181               |
| W          | $12.00 \pm 0.3$  | $0.472 \pm 0.012$   |
| P1         | $8.00 \pm 0.1$   | $0.31 \pm 0.004$    |
| K0         | 1.1              | 0.043               |
| A0         | 5.30             | 0.208               |
| B0         | 5.30             | 0.208               |

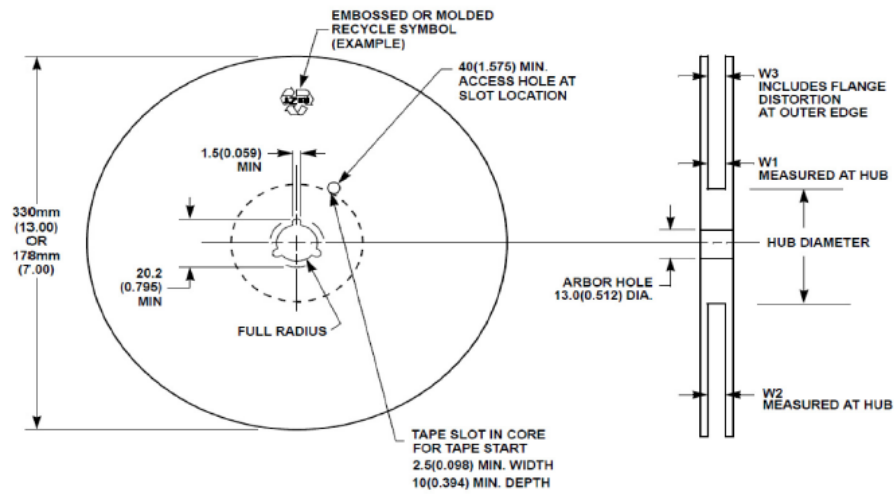


**Figure 17 • PD69200 Reel Specification**

The following table lists the PD69200 reel mechanical data.


**Table 27 • PD69200 Reel Mechanical Data**

| Dimensions | Value (mm) | Value (inches) |
|------------|------------|----------------|
| Tape size  | 12 +0.3    | 0.472 +0.012   |
| W1         | 12.4       | 0.488          |
| W2         | 18.4       | 0.724          |
| W3         | 15.4       | 0.606          |

### 6.3.2 PD69208M Tape and Reel Specification

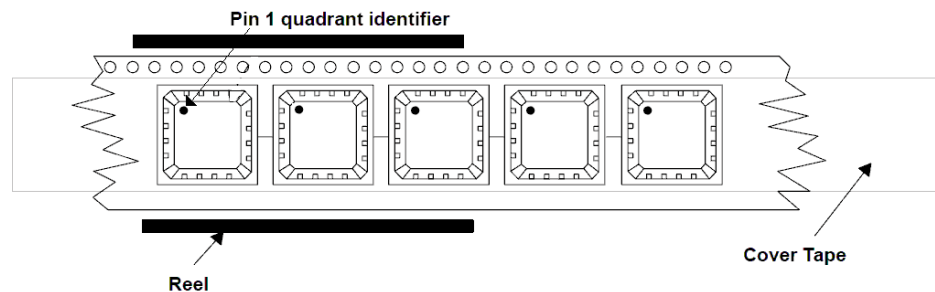**Figure 18 • PD69208M Tape and Reel Pin-1 Orientation****Pin-1 Orientation of QFN Packages**

### Figure 19 • PD69208M Tape Specifications

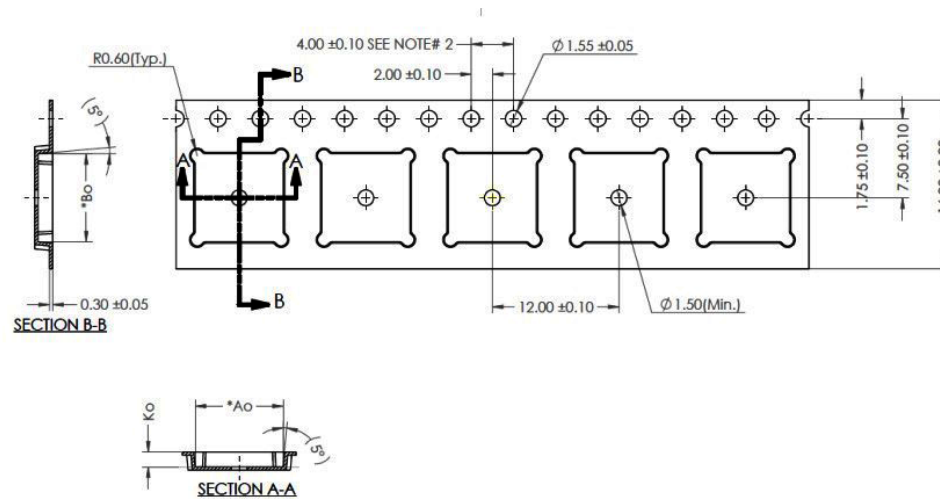

The following table lists the PD69208M tape mechanical data.

### Table 28 • PD69208M Tape Mechanical Data

| Dimension | Value (mm)  |
|-----------|-------------|
| A0        | 8.35 ±0.10  |
| B0        | 8.35 ±0.10  |
| K0        | 1.40 ±0.10  |
| K1        | N/A         |
| Pitch     | 12.00 ±0.10 |
| Width     | 16.00 ±0.30 |

Figure 20 • PD69208M Reel Specifications

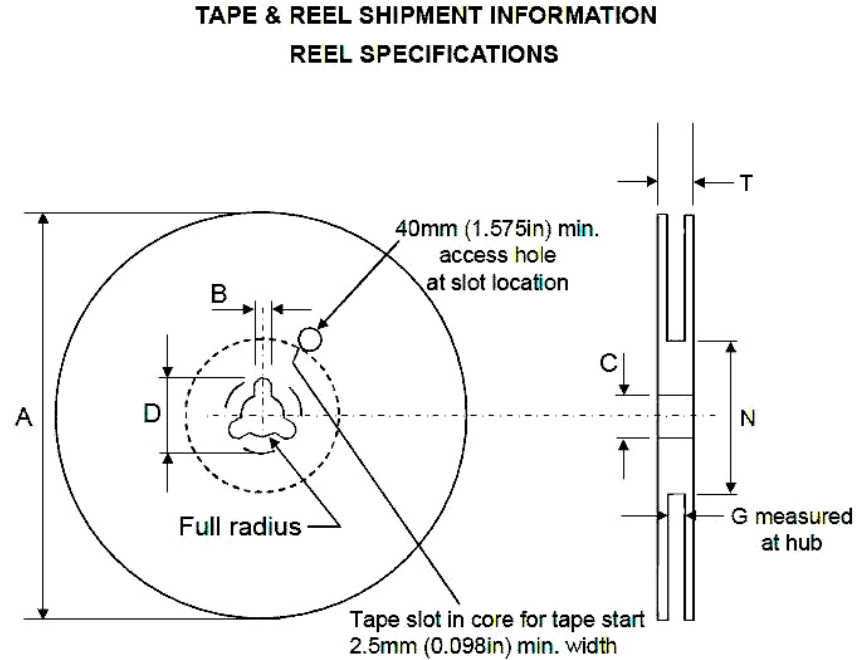


Table 29 • PD69208M Reel Mechanical Data

| Dimensions    | Value (mm)    | Value (inch)     |
|---------------|---------------|------------------|
| Tape size     | 16.00 ±0.3    | 0.630 ±0.012     |
| A max         | 330           | 13               |
| B max         | 1.5           | 0.059            |
| C             | 13.0 ±0.20    | 0.512 ±0.008     |
| D min         | 20.2          | 0.795            |
| N min         | 50            | 1.968            |
| G             | 16.4+2.0/-0.0 | 0.645+0.079/-0.0 |
| T max         | 29            | 1.142            |
| Base quantity | 2000 pieces   |                  |

## 6.4 Reference Documents

- IEEE Std 802.3-2018 Clause 33 Power over Ethernet over 2-Pair and Clause 145 Power over Ethernet
- Microsemi, Serial communication protocol user guide (Catalog Number: PD69200\_UG\_COMM\_PROT)
- Microsemi, Designing 48-port Enhanced PoE System (802.3af/802.3at Compliant) application note (Catalog Number: PD69208\_AN\_211)
- Microsemi, Software Download Algorithm technical note (TN-140 (Catalog Number: 06-0024-081)
- Microsemi, PoE LED stream technical note (Catalog Number: PD69100\_TN\_201)
- NXP, Kinetis\_L MKL15Z128VFM4 datasheet
- NXP package drawings 98ASA00473D

## 7 Application Information

The PD69208M/PD69200 PSE chipset performs IEEE802.3af (Type 1), IEEE802.3at (Type 2), and IEEE802.3bt (Type 3) PSE functionalities in addition to the pre-standard and legacy (capacitor) detection. Moreover, it includes additional protections such as short circuit and dV/dT protection upon startup.

**Note:** IEEE802.3bt functionality will be enabled by a firmware upgrade.

### 7.1 PD Detection

The PD detection feature detects a valid IEEE802.3af, IEEE802.3at, or IEEE802.3bt. The PD detection is done based on four different voltage levels generated over PD (the load) as illustrated in the [Typical IEEE802.3bt Port PoE Voltage Diagram](#) (see page 42).

### 7.2 Legacy (Reduced Capacitor) Detection


When legacy detection is enabled, the PD detection mechanism detects and powers up the legacy and pre-standard PDs as well as IEEE802.3af, IEEE802.3at, and IEEE802.3bt standard compliant PDs (Classes 0–6).


### 7.3 Classification

The classification process takes place immediately after PD detection is successfully completed. The goal of the classification process is to detect PD class as specified in IEEE802.3 standards.

In IEEE802.3af mode, the classification mechanism is based on a single voltage level (single event). In IEEE802.3at and IEEE802.3bt modes, the classification mechanism is based on two voltage levels (multiple events) as defined in IEEE802.3-2015 Clause 33 and IEEE802.3bt.

**Figure 21 • 4-Pair PoE System Diagram**

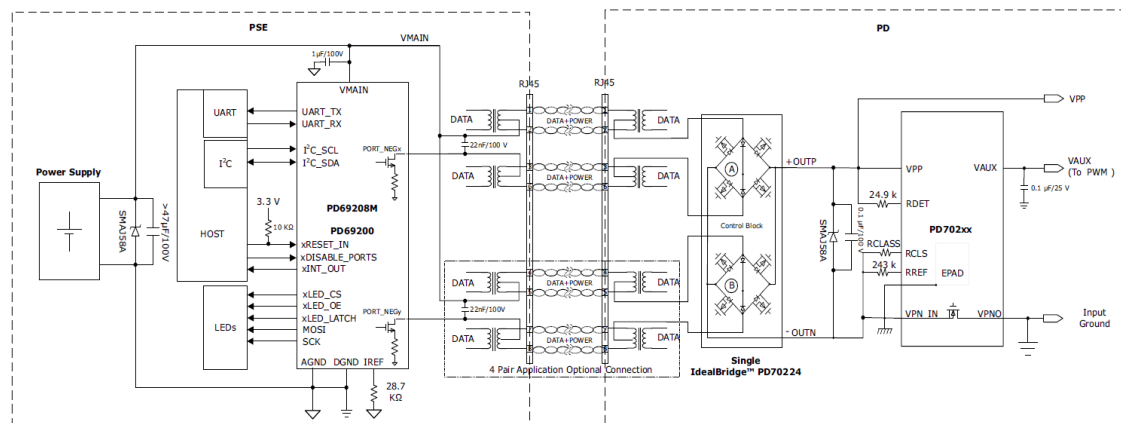

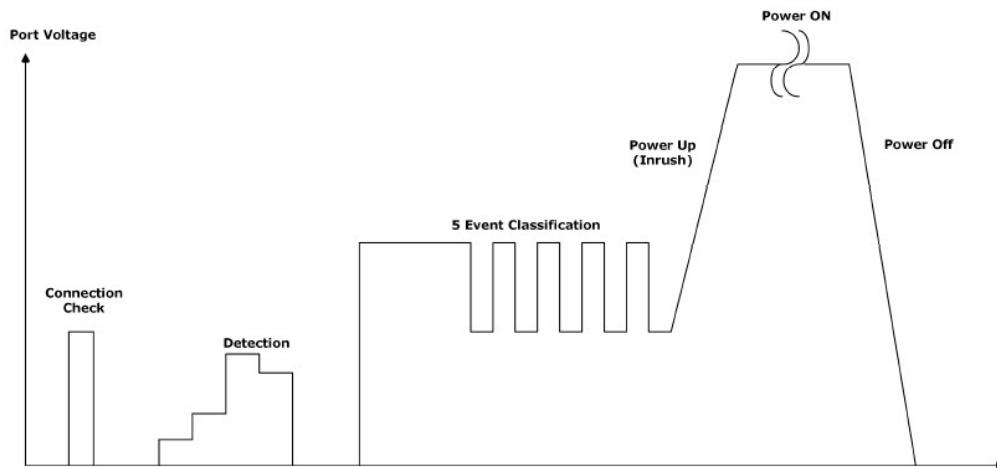**Figure 22 • Typical IEEE802.3bt Port PoE Voltage Diagram**

## 7.4 Port Start-Up

Upon a successful detection and classification process, power is applied to the load via a controlled start-up mechanism.

During this period, inrush current is limited to 425 mA for a typical duration of 65 mS, which allows PD load to charge and allows a steady state of power condition.

## 7.5 Over-Load Detection and Port Shut Down

After power-up, PD69208M automatically initializes its internal protection mechanisms. These mechanisms are used to monitor and disconnect power from the PD when extreme conditions occur, as specified in the IEEE802.3 standards. These conditions include over-current or short ports terminals scenarios.

## 7.6 Disconnect Detection

PD69208M supports the DC disconnect function as per IEEE802.3 standards. This mechanism continuously monitors load current and disconnects power according to  $I_{UDL}$ ,  $T_{MPDO}$ , and  $T_{MPS}$  parameters as specified in [PD69208M Port Real Time Protection](#).

## 7.7 IC Thermal Monitoring

PD69208M contain a thermal sensor that is sampled by the PD69200 for every 20 mS so that the PD69208M die temperature is monitored at all times. If the die exceeds the temperature limit (150 °C), the system ports are disconnected to protect the PD69208M ICs.

A temperature alarm threshold can be set by PD69200 controller to send interrupt indication by the xINT\_OUT pin before ports are disconnected. The temperature can be read and monitored by the host as well, if required.

## 7.8 Over-Temperature Protection

In addition to the die thermal sensor, there are thermal sensors on each MOSFET that continuously monitors each port main MOSFETs junction temperature, and shuts down the port load power when the temperature exceeds 200 °C.

## 7.9 V MAIN Out of Range Protection

The system automatically disconnects ports power when  $V_{MAIN}$  exceeds the pre-configured over-voltage and under-voltage thresholds.

## 7.10 2-Pair and 4-Pair Ports

Operation modes include the following:

- POE Type 1/2 class 0-4 (up to 30 W)
- POE Type 3 class 0-4 2-pair and class 5-6 4-pair (up to 60 W)

**Note:** For more information about 4-pair operation modes and power configuration, see Microsemi PoE 4-Pair Behavior PD6920x PSE Application Note 160159.

## 7.11 Power Management

The system supports three power management modes:

- Class (LLDP and CDP)
- Dynamic
- Static

## 7.12 Port Power Limit

Port power limit (PPL) is used to configure port power limit. When a port exceeds the power limit, it gets disconnected automatically.

## 7.13 Reset Pin

The xRESET pin is PD69200 digital host reset input (Active Low). The shortest pulse that is guaranteed to be recognized is 100 ns. PD69200 can generate self-reset. The xRESET pin is driven low by PD69200 for at least 128 bus clock cycles until the flash initialization has completed. It is recommended to connect this pin to a host open drain output with a pull-up in a range of 4.7 K $\Omega$  to 10 K $\Omega$ . If this pin is connected to a push/pull driver, a serial resistor of 4.7 K $\Omega$  must be connected instead of a pull-up. Avoid resetting the PD69208M IC directly by the RESET\_N pin. PD69200 controls the PD69208M ICs when the system reset is needed.

For more information about this pin connectivity, see the hardware application note (Catalog Number: PD69208\_AN\_211).

## 7.14 System OK Indication

Digital output pin to host is used as a system validity indication. When system is OK, pin state is low. The behavior of this output is controlled by software mask register settings (Mask 0x28). The mask default settings is 0, meaning that this pin indicates valid software and  $V_{MAIN}$  is in range. This pin is active low.

For more information, see the Serial Communication Protocol User Guide document (Catalog Number: PD69200\_UG\_COMM\_PROT).

### 7.15 Interrupt Pin

Interrupt out from PoE controller, indicating events such as port on, port off, port fault, PoE device fault, voltage out of range, and more. For a full list of interrupt events, see the Serial Communication Protocol User Guide (Catalog Number: PD69200\_UG\_COMM\_PROT). This pin is active low.

### 7.16 Port Matrix Control

Port matrix control enables layout designers to ascribe each physical port in the system to a logical port if required.

### 7.17 Power Good Interrupt

Interrupt from power supply directly to PD69208M manager. For systems comprising more than a single power supply, in case one power supply fails, a port shutdown mechanism is executed to maintain operation and prevent the collapse of other power supplies.

When a function is used, PGD0, PGD1, PGD2, and PGD3 should be connected to the main power supply status indication pin. Any change of at least 1  $\mu$ s on these lines triggers a pre-defined disconnection matrix. This matrix is defined by PD69200 system power parameters. The port shutdown function reacts within 2  $\mu$ s to any power good event.

### 7.18 LED Stream


The direct SPI interface to an external LED stream circuitry that can drive LEDs directly without the host intervention. It enables designers to implement a simple LED circuit that does not require a software code. The LED stream clock frequency is 1 MHz.

For more information, see the TN-218 (Catalog Number: PD69200\_TN\_218).



## 7.19 Power Sequencing

Figure 23 • Power Sequencing

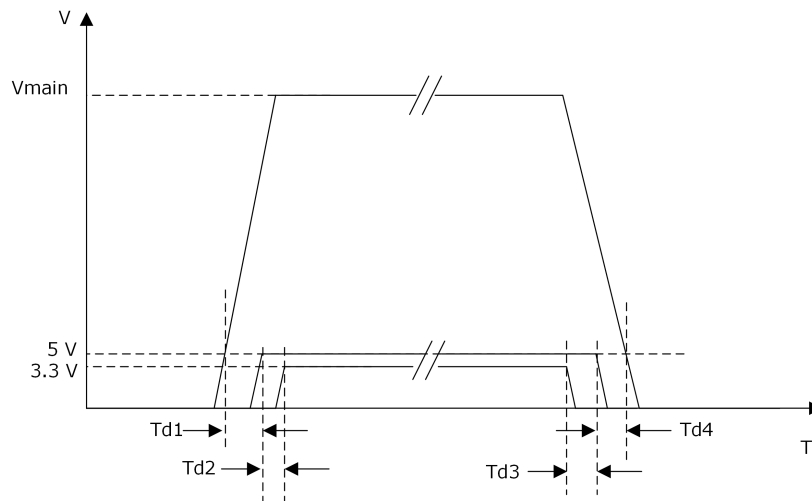

When using external  $V_{aux5}$  or  $V_{aux3p3}$ :

- Td1:  $V_{MAIN}$  at 5 V to  $V_{aux5} > 0 \mu s$
- Td2:  $V_{aux5}$  to  $V_{aux3p3} > 0 \mu s$
- Td3:  $V_{aux3p3}$  to  $V_{aux5} > 0 \mu s$
- Td4:  $V_{aux5}$  to  $V_{MAIN}$  at 5 V  $> 0 \mu s$
- $DV_{DD} = V_{aux3p3}$

**Note:** See the Application Note AN211 Designing a PD69208 48-port PoE System 802.3af/802.3at compliant.

For proper operations, you need to ensure that  $V_{MAIN}$  is always in the highest voltage connected to the IC. With an external DC-DC converter, the maximum 3.3 V slew rate is 100 ms.

## 8 Ordering Information

The following table lists the part ordering information for PD69200 and PD69208M devices.

**Table 30 • Ordering Information**

| Part Number  | Package                                 | Packaging Type | Temperature     | Part Marking   | Tray Marking   |
|--|---|----------------|-----------------|--|--|
| PD69200D <sup>1</sup> -VVVV <sup>2</sup> SS <sup>3</sup> | Plastic QFN<br>5 mm × 5 mm<br>(32 lead) | Tray           | –40 °C to 85 °C | Microsemi Logo<br>NXP Logo<br>69200<br>M15M7V <sup>4</sup><br>XXXXX <sup>5</sup><br>YYYYY <sup>6</sup> | PD69200D-<br>VVVVSS<br>PD-OOOOG3bb <sup>7</sup><br>YYWW    |
| PD69200D-VVVVSS-TR                                       | Plastic QFN<br>5 mm × 5 mm<br>(32 lead) | Tape and reel  | –40 °C to 85 °C | Microsemi Logo<br>NXP Logo<br>69200<br>M15M7V <sup>4</sup><br>XXXXX <sup>5</sup><br>YYYYY <sup>6</sup> | PD69200D-<br>VVVVSS-TR<br>PD-OOOOT3bb <sup>7</sup><br>YYWW |
| PD69208MILQ-TR-LE  | Plastic QFN<br>8 mm × 8 mm<br>(56 lead) | Tape and reel  | –40 °C to 85 °C | Microsemi Logo<br>PD69208M<br>L E e4 <sup>8</sup><br>YYWWNNN <sup>9</sup>                              |  |

1. D stands for the detection method set as: C: Detection Method = IEEE802.3 and pre-standard; R: Detection Method = IEEE802.3.
2. VVVV is firmware revision.
3. SS stands for firmware parameters options.
4. Short part number
5. Mask set
6. Date code
7. MKTG Product Type (Detection = R: Resistor/D = C: Resistor/Legacy)/Version/SW Parameters /Operation P/N.
8. L = FAB Code, E for V2R4, and e4 = Second level interconnect.
9. YY = Year, WW = Week, and NNN = Trace code.

The Firmware Release Note has all the required information about how to specify the choice of VVVV and SS. You can find the Firmware Release Notes in the [Microchip Software Libraries](#), and register yourself to a My Microchip account to have access to the release notes.

**Note:** The package meets RoHS, Pb-free, and MSL3 of the European Council to minimize the environmental impact of electrical equipment.

**Note:** Initial burning of controller's firmware is performed in the factory. Firmware upgrades can be performed by users using the communication interface. For more information, see TN-140 (Catalog Number: 06-0024-081).

The following table lists the manufacturing and ordering part numbers of PD69208M devices.

**Table 31 • PD69208M Manufacturing and Ordering Part Numbers**

| Ordering Part Number | Die Revision | Product Revision Code | Manufacturing Part Number |
|----------------------|--------------|-----------------------|---------------------------|
| PD69208MILQ-TR-LE    | V2R4         | E                     | PD69208MILQ-TR-LE         |

**Note:** Customers can order the PD69208M device using either the ordering part number or the manufacturing part number. See [Ordering Information \(see page 46\)](#) for a package, packing type, temperature, and part marking information.

**Microsemi Headquarters**

One Enterprise, Aliso Viejo,  
CA 92656 USA  
Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Sales: +1 (949) 380-6136  
Fax: +1 (949) 215-4996  
Email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

© 2019 Microsemi. All rights reserved. Microsemi and the Microsemi logo are trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions; setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions; security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California, and has approximately 4,800 employees globally. Learn more at [www.microsemi.com](http://www.microsemi.com).

PD-000303451

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[PD-IM-7648M](#)