

Helping Customers Innovate, Improve & Grow



Description

Vectron's VC-840 Crystal Oscillator (XO) is a quartz stabilized square wave generator with a CMOS output. The VC-840 is a fundamental oscillator resulting in very low jitter performance, and a monolithic IC which improves reliability and reduces cost.


Features

- CMOS output XO
- 1-160.000 MHz Output Frequency
- 1.8, 2.5 or 3.3 V Operation
- Fundamental Crystal Design with low Jitter Performance
- Output Disable Feature
- Small Industry Standard Package, 2.5x2.0mm
- Product is compliant to RoHS directive  and fully compatible with lead free assembly

Applications

- SONET/SDH/DWDM
- Ethernet, GE, SynchE
- Storage Area Networking
- Fiber Channel
- Digital Video
- Broadband Access
- Base Stations, Picocells

Block Diagram

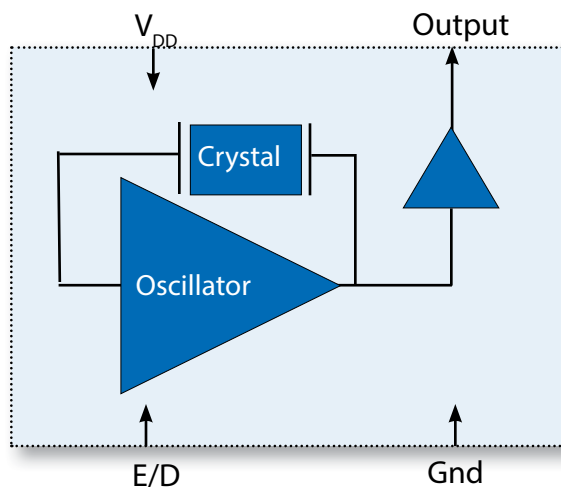

Specifications

Table 1. Electrical Performance, 3.3 V option

Parameter	Symbol	Min	Typical	Maximum	Units
Supply					
Voltage ¹	V _{DD}	3.15	3.3	3.45	V
Maximum Voltage		-0.5		7	V
Current ² , <20.000MHz 20.000-40.000MHz 40.001-60.000MHz 60.001-75.000MHz 75.001-100.000MHz 100.001-130.000MHz 130.001-160.000MHz	I _{DD}			7 13 19 24 25 30 35	mA
Current, Output Disabled				10	uA
Frequency					
Nominal Frequency	f _N	0.75		160	MHz
Stability ³ , Ordering Information		±25, ±50 or ±100			ppm
Outputs					
Output Logic Levels ² Output Logic High Output Logic Low Output Logic High Drive Output Logic Low Drive	V _{OH} V _{OL} I _{OH} I _{OL}	0.9*V _{DD} 4 4		0.1*V _{DD}	V V mA mA
Load	I _{OUT}			15	pF
Output Rise /Fall Time ² , f _N ≤ 75MHz f _N > 75MHz	t _R /t _F		2.5 2.0	5 3	ns ns
Duty Cycle ² , ⁴		45		55	%
Phase Jitter, 125MHz, 12kHz-20MHz			90	150	fs
Period Jitter ⁵ RMS Peak-Peak	ϕJ		1.5 12		ps ps
Enable/Disable					
Output Enable/Disable ⁶ Output Enable Output Disable	V _{IH} V _{IL}	0.7*VDD		0.3*VDD	V V
Disable Time				150	ns
Start-Up Time	t _{SU}			10	ms
Operating Temp, Ordering Information	T _{OP}	-20/70, -40/85 and -40/105			°C

1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF.

2] Parameters are tested with production test circuit below , Figure 1.

3] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging

4] Duty Cycle is measured as On Time/Period (Fig 2).

5] Broadband Period Jitter measured using LeCroy Waverunner 610Zi, 200k minimum samples

6] The Output is Enabled if the Enable/Disable is left open.

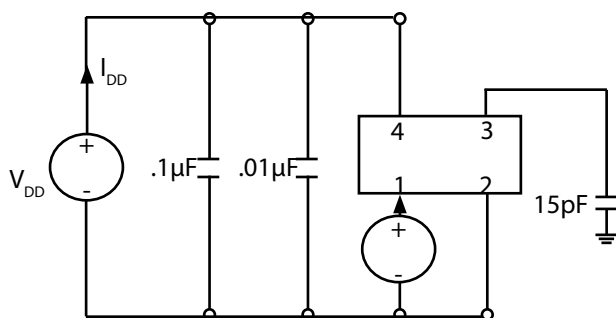


Fig 1: Test Circuit

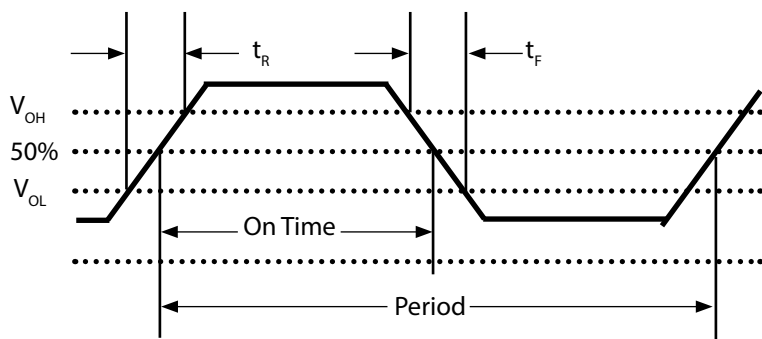


Fig 2: Waveform

Specifications

Table 2. Electrical Performance, 2.5V option

Parameter	Symbol	Min	Typical	Maximum	Units
Supply					
Voltage ¹	V _{DD}	2.375	2.5	2.625	V
Maximum Voltage		-0.5		7	V
Current ² , <20.000MHz 20.000-40.000MHz 40.001-60.000MHz 60.001-75.000MHz 75.001-100.000MHz 100.001-130.000MHz 130.001-160.000MHz	I _{DD}			5 9 11 14 20 25 30	mA
Current, Output Disabled				10	uA
Frequency					
Nominal Frequency	f _N	0.75		160	MHz
Stability ³ , Ordering Information		±25, ±50 or ±100			ppm
Outputs					
Output Logic Levels ² Output Logic High Output Logic Low Output Logic High Drive Output Logic Low Drive	V _{OH} V _{OL} I _{OH} I _{OL}	0.9*V _{DD} 4 4		0.1*V _{DD}	V V mA mA
Load	I _{OUT}			15	pF
Output Rise /Fall Time ² f _N ≤ 75MHz f _N > 75MHz	t _R /t _F		2.5 2	5 3	ns ns
Duty Cycle ² , ⁴		40		60	%
Phase Jitter, 125MHz, 12kHz-20MHz			100	170	fs
Period Jitter ⁵ RMS Peak-Peak	ϕJ		1.5 12		ps ps
Enable/Disable					
Output Enable/Disable ⁶ Output Enable Output Disable	V _{IH} V _{IL}	0.7*VDD		0.3*VDD	V V
Disable Time				150	ns
Start-Up Time	t _{SU}			10	ms
Operating Temp, Ordering Information	T _{OP}	-20/70, -40/85 and -40/105			°C

1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF.

2] Parameters are tested with production test circuit below , Figure 1.

3] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging

4] Duty Cycle is measured as On Time/Period (Fig 2).

5] Broadband Period Jitter measured using LeCroy Waverunner 610Zi, 200k minimum samples

6] The Output is Enabled if the Enable/Disable is left open.

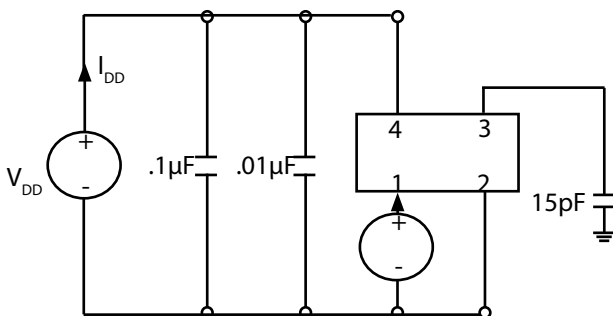


Fig 3: Test Circuit

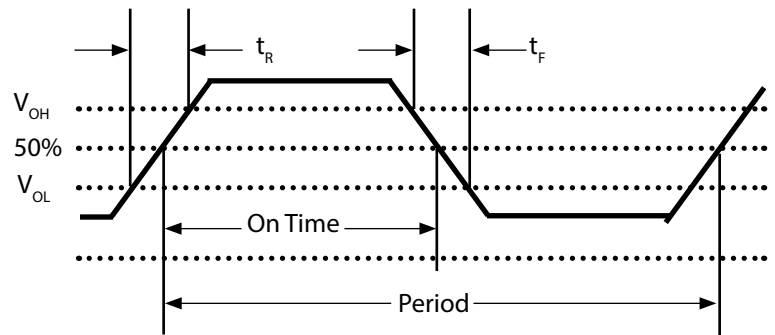


Fig 4: Waveform

Specifications

Table 3. Electrical Performance, 1.8V option

Parameter	Symbol	Min	Typical	Maximum	Units
Supply					
Voltage ¹	V _{DD}	1.71	1.8	1.89	V
Maximum Voltage		-0.5		7	V
Current ² , <20.000MHz 20.000-40.000MHz 40.001-50.000MHz 50.001-75.000MHz 75.001-100.000MHz 100.001-130.000MHz	I _{DD}			2.5 3.0 3.5 10 15 20	mA
Current, Output Disabled				10	uA
Frequency					
Nominal Frequency	f _N	0.75		125	MHz
Stability ³ , <i>Ordering Information</i>		±25, ±50 or ±100			ppm
Outputs					
Output Logic Levels ² Output Logic High Output Logic Low Output Logic High Drive Output Logic Low Drive	V _{OH} V _{OL} I _{OH} I _{OL}	0.9*V _{DD} 4 4		0.1*V _{DD}	V V mA mA
Load	I _{OUT}			15	pF
Output Rise /Fall Time ² f _N ≤ 75MHz f _N > 75MHz	t _R /t _F		2.5 2	5 3	ns ns
Duty Cycle ² , ⁴		45		55	%
Phase Jitter, 125MHz, 12kHz-20MHz			150	225	fs
Period Jitter ⁵ RMS Peak-Peak	ϕJ		1.5 12		ps ps
Enable/Disable					
Output Enable/Disable ⁶ Output Enable Output Disable	V _{IH} V _{IL}	0.7*VDD		0.3*VDD	V V
Disable Time				150	ns
Start-Up Time	t _{SU}			10	ms
Operating Temp, <i>Ordering Information</i>	T _{OP}	-20/70, -40/85, -40/105			°C

1] The power supply should have by-pass capacitors as close to the supply and to ground as possible, for example 0.1 and 0.01uF.

2] Parameters are tested with production test circuit below , Figure 1.

3] Includes initial accuracy, operating temperature, supply voltage, shock and vibration (not under operation) and aging

4] Duty Cycle is measured as On Time/Period (Fig 2).

5] Broadband Period Jitter measured using LeCroy Waverunner 610Zi, 200k minimum samples

6] The Output is Enabled if the Enable/Disable is left open.

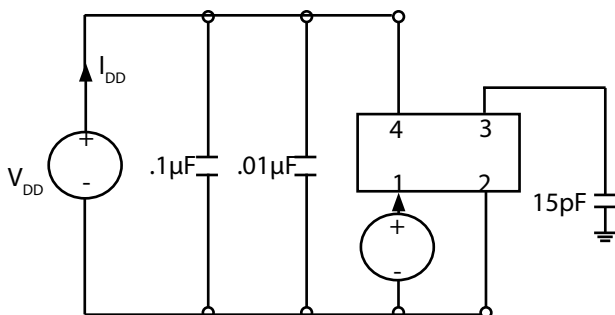


Fig 5: Test Circuit


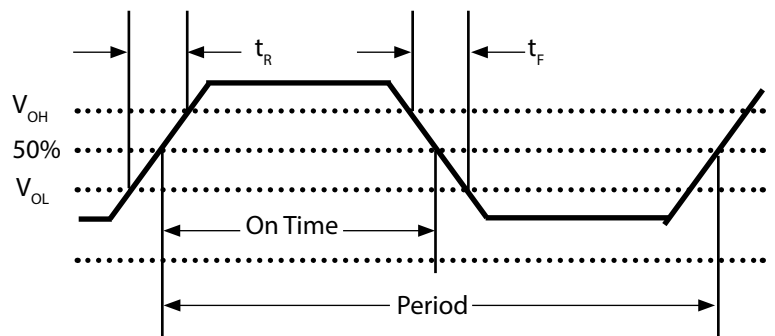


Fig 6: Waveform

Outline Drawing & Pad Layout

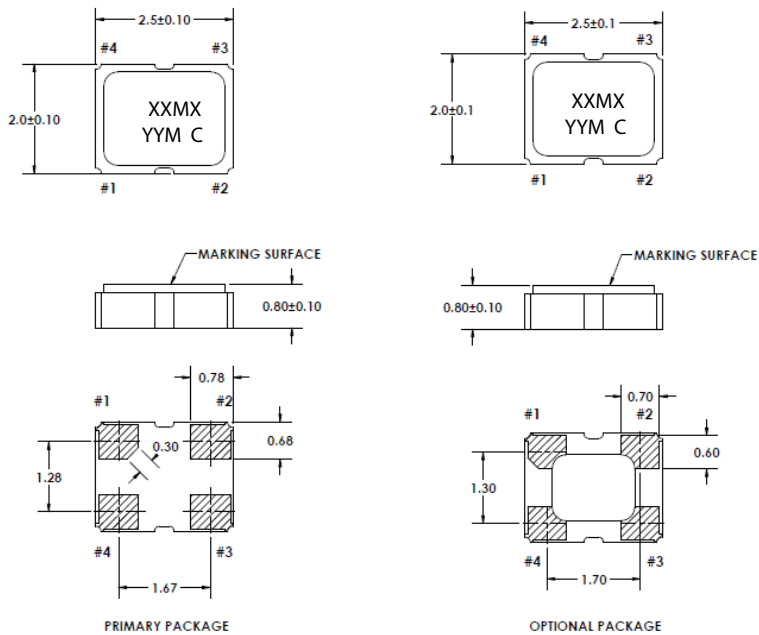

Dimensions in mm




Table 4. Pin Out

Pin	Symbol	Function
1	E/D	Enable Disable
2	GND	Case and Electrical Ground
3	Output	Output
4	V _{DD}	Power Supply Voltage

Table 5. Enable Disable Function

E/D Pin	Output
High	Clock Output
Open	Clock Output
Low	High Impedance

Reliability

Vectron qualification includes aging at various extreme temperatures, shock and vibration, temperature cycling, and IR reflow simulation. The VC-840 family is capable of meeting the following qualification tests:

Table 6. Environmental Compliance

Parameter	Conditions
Mechanical Shock	MIL-STD-883, Method 2002
Mechanical Vibration	MIL-STD-883, Method 2007
Solderability	MIL-STD-883, Method 2003
Gross and Fine Leak	MIL-STD-883, Method 1014
Resistance to Solvents	MIL-STD-883, Method 2015
Moisture Sensitivity Level	MSL 1
Contact Pads	Gold (0.3 um min to 1.0 um max) over Nickel

Although ESD protection circuitry has been designed into the VC-840 proper precautions should be taken when handling and mounting. Vectron employs a human body model (HBM) and a charged device model (CDM) for ESD susceptibility testing and design protection evaluation.

Table 7. ESD Ratings

Model	Minimum	Conditions
Human Body Model	1500V	MIL-STD-883, Method 3015
Charged Device Model	1000V	JESD22-C101

Stresses in excess of the absolute maximum ratings can permanently damage the device. Functional operation is not implied at these or any other conditions in excess of conditions represented in the operational sections of this datasheet. Exposure to absolute maximum ratings for extended periods may adversely affect device reliability. Permanent damage is also possible if E/D is applied before V_{DD}.

Table 8. Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Storage Temperature	T _S	-55 to 100	°C
Soldering Temp/Time	T _{LS}	260 / 10	°C / sec

IR Reflow

Solderprofile:

The VC-840 is qualified to meet the JEDEC standard for Pb-Free assembly. The temperatures and time intervals listed are based on the Pb-Free small body requirements. The VC-840 device is hermetically sealed so an aqueous wash is not an issue.

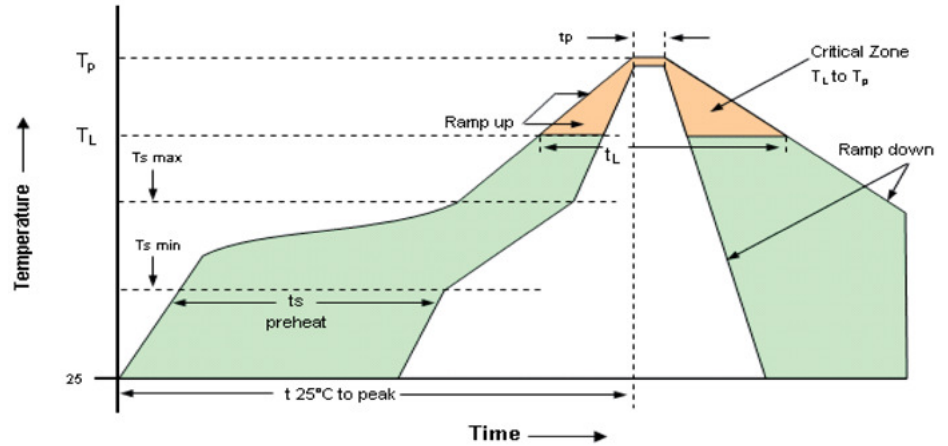



Table 9. Reflow Profile

Parameter	Symbol	Value
PreHeat Time Ts-min Ts-max	t _s	60 sec Min, 260 sec Max 150°C 200°C
Ramp Up	R _{UP}	3 °C/sec Max
Time Above 217 °C	t _L	60 sec Min, 150 sec Max
Time To Peak Temperature	T _{AMB-P}	480 sec Max
Time at 260 °C	t _p	30 sec Max
Ramp Down	R _{DN}	6 °C/sec Max

Tape and Reel

Table 10 . Tape and Reel Dimensions

Tape Dimensions (mm)						Reel Dimensions (mm)						
Dimension	W	F	Do	Po	P1	A	B	C	D	N	W1	W2
Tolerance	Typ	Typ	Typ	Typ	Typ	Typ	Min	Typ	Min	Min	Typ	Max
VC-840	8.0	3.5	1.5	4.0	4.0	180	2.0	13.0	21.0	60.0	9	11.4

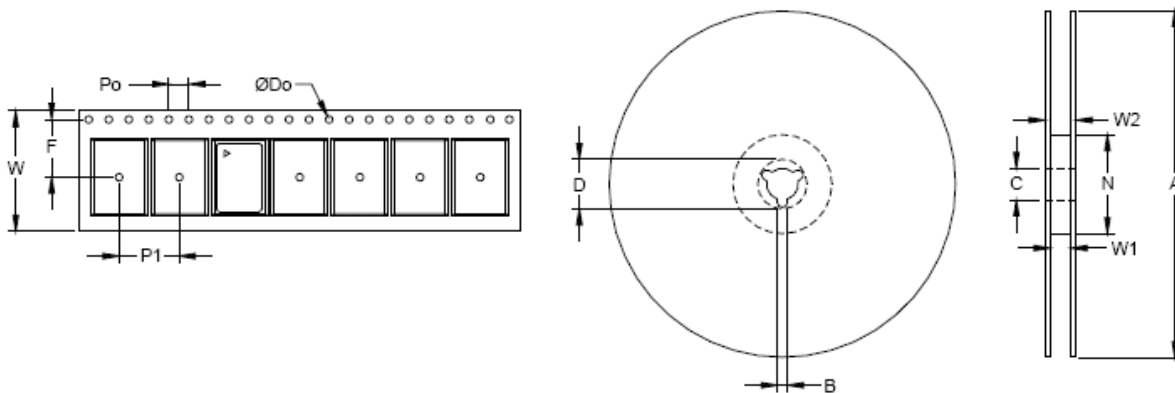

Ordering Information

VC-840-EAE-KAAN- xxMxxxxxxxxXX

Product Family
Crystal Oscillator

Package Size
2.5x2.0x0.9mm

Supply Voltage
E: +3.3Vdc
H: +2.5Vdc
J: +1.8Vdc

Output
A: LVCMOS

Operating Temperature
J: -20/70°C
E: -40/85°C
F: -40/105°C

Packaging
TR: Tape and Reel
blank: Cut Tape / non Tape and Reel quantities
_SNPB: Tin lead solder dipped

Frequency (See Above)
In MHz

Other
N: Standard

Load
A: 15pF

Enable/Disable Options
A: Enable High

Stability Options
S: ±100ppm
K: ±50ppm
F: ±25ppm

Note: Not all combinations of options are available. Other specifications may be available upon request. Consult with factory.

Example:

VC-840-EAE-KAAN-25M0000000TR

VC-840-EAE-KAAN-25M0000000

VC-840-EAE-KAAN-25M0000000_SNPB

Tape and Reel

Cut Tape

Tin lead solder dipped

Revision History

Revision Date	Edited	Approved	Description
May 14, 2014	VN	TG	Corrected Operating Temperature in Specification Tables 1, 2 and 3 to show -20/70°C Removed Standard Output Frequencies Table 10 (Empty)
Aug 4, 2015	EM	DL	Added temp range -40/105°C and note in RED on page 7
Aug 16, 2015	EM	DL	Updated Rise/Fall time
Jan 17, 2017	RC	RC	Update IR Reflow Table
Aug 10, 2018	FB	FB	Update logo and contact information, added SNPB DIP ordering option
March 30, 2019	FB	YM	Update logo, add gold thickness, add phase jitter, update SNPB DIP to SNPB
April 30, 2020	FB	YM	Add tape and reel ordering option, updates and corrections as needed

Contact Information

USA:

100 Watts Street
Mt Holly Springs, PA 17065
Tel: 1.717.486.3411
Fax: 1.717.486.5920

Europe:

Landstrasse
74924 Neckarbischofsheim
Germany
Tel: +49 (0) 7268.801.0
Fax: +49 (0) 7268.801.281



Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications. MICROCHIP MAKES NO REPRESENTATION OR WARRANTIES OF ANY KIND WHETHER EXPRESS OR IMPLIED, WRITTEN OR ORAL, STATUTORY OR OTHERWISE, RELATED TO THE INFORMATION INCLUDING, BUT NOT LIMITED TO ITS CONDITION, QUALITY, PERFORMANCE, MERCHANTABILITY OR FITNESS FOR PURPOSE. Microchip disclaims all liability arising from this information and its use. Use of Microchip devices in life support and/or safety applications is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless Microchip from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly, or otherwise, under any Microchip intellectual property rights unless otherwise stated.

Trademarks

The Microchip and Vectron names and logos are registered trademarks of Microchip Technology Incorporated in the U.S.A. and other countries.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Microchip:

[VC-840-EAE-FAAN-14M3181800](#) [VC-840-EAE-FAAN-1M84320000](#) [VC-840-EAE-FAAN-20M0000000](#) [VC-840-EAE-FAAN-25M0000000](#) [VC-840-EAE-FAAN-29M4912000](#) [VC-840-EAE-FAAN-33M0000000](#) [VC-840-EAE-FAAN-33M3330000](#) [VC-840-EAE-FAAN-37M1250000](#) [VC-840-EAE-FAAN-40M0000000](#) [VC-840-EAE-FAAN-50M0000000](#) [VC-840-EAE-FAAN-54M0000000](#) [VC-840-EAE-FAAN-8M00000000](#) [VC-840-EAE-KAAN-12M0000000](#) [VC-840-EAE-KAAN-25M0000000](#) [VC-840-EAE-KAAN-32M7680000](#) [VC-840-EAE-KAAN-48M0000000](#) [VC-840-EAF-KAAN-48M0000000](#) [VC-840-EAF-KAAN-7M37280000](#) [VC-840-EAJ-FAAN-24M0000000](#) [VC-840-EAJ-FAAN-25M0000000](#) [VC-840-EAJ-KAAN-50M0000000](#) [VC-840-HAE-FAAN-25M0000000](#) [VC-840-HAW-KAAN-125M000000](#) [VC-840-JAE-FAAN-14M3181800](#) [VC-840-JAE-FAAN-25M0000000](#) [VC-840-JAE-KAAN-25M0000000](#) [VC-840-JAF-KAAN-33M3333300](#) [VC-840-JAJ-KAAN-20M8000000](#) [VC-840-JAE-KAAN-33M3333000](#) [VC-840-EAE-KAAN-50M0000000](#) [VC-840-EAJ-KAAN-40M0000000](#) [VC-840-HAE-KAAN-25M6000000](#) [VC-840-JAE-KAAN-126M488095](#) [VC-840-JAE-KAAN-126M488095TR](#) [VC-840-9002-49M1520000](#) [VC-840-9003-50M0000000](#) [VC-840-9005-12M80000000](#) [VC-840-9006-25M0000000](#)