


# Silicon Power Rectifier S/R21 Series

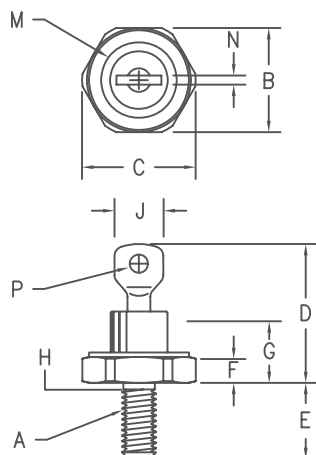

## Notes:

1. 10-32 UNF3A
2. Full threads within 2 1/2 threads
3. Standard Polarity: Stud is Cathode  
Reverse Polarity: Stud is Anode

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	---	---	---	---	1
B	.424	.437	10.77	11.10	
C	---	.505	---	12.82	
D	.600	.800	15.24	20.32	
E	.422	.453	10.72	11.50	
F	.075	.175	1.91	4.44	
G	---	.405	---	10.29	
H	.163	.189	4.15	4.80	2
J	---	.310	---	7.87	
M	---	.350	---	8.89	Dia
N	.020	.065	.510	1.65	
P	.070	.100	1.78	2.54	Dia

D0203AA (D04)

Microsemi Catalog Number	JEDEC Numbers	Peak Reverse Voltage
1N2246,A	1N2598	50V
1N2248,A		100V
		150V
*S2120	1N2250,A	200V
	1N2252,A	300V
*S2140	1N2254,A	400V
	1N2256,A	500V
*S2160	1N2258,A	600V
		700V
*S2180	1N2260,A	800V
	1N3670,A	900V
	1N3671,A	1000V
*S21100	1N2262,A	1200V
*S21120	1N2264,A	1400V
*S21140		1600V
*S21160	1N5331	1600V

\*Change S to R in part number for Reverse Polarity  
For 1N types, use an R suffix for Reverse Polarity

- Glass Passivated Die
- Low Forward Voltage
- 250A Surge Rating
- Glass to metal seal construction
- $V_{RRM}$  to 1600V
- Low cost Non-RoHS package

## Electrical Characteristics

Average forward current	IF(AV) 22 Amps	$T_C = 134^{\circ}\text{C}$ , half sine wave, $R_{\theta JC} = 2.5^{\circ}\text{C/W}$
Maximum surge current	IFSM 250 Amps	8.3ms, half sine, $T_J = 200^{\circ}\text{C}$
Max $I^2 t$ for fusing	$I^2 t$ 260 $\text{A}^2\text{s}$	
Max peak forward voltage	$V_{FM}$ 1.2 Volts	$I_{FM} = 30\text{A}; T_J = 25^{\circ}\text{C}$
Max peak reverse current	$I_{RM}$ 10 $\mu\text{A}$	$V_{RRM}, T_J = 25^{\circ}\text{C}$
Max peak reverse current	$I_{RM}$ 1.0 mA	$V_{RRM}, T_J = 150^{\circ}\text{C}$
Max Recommended Operating Frequency	10kHz	

\*Pulse test: Pulse width 300  $\mu\text{sec}$ . Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temperature range	$T_{STG}$	$-65^{\circ}\text{C}$ to $200^{\circ}\text{C}$
Operating junction temp range	$T_J$	$-65^{\circ}\text{C}$ to $200^{\circ}\text{C}$
Maximum thermal resistance	$R_{\theta JC}$	$2.5^{\circ}\text{C/W}$ Junction to Case
Mounting torque		25-30 inch pounds
Weight		.16 ounces (5.0 grams) typical

# S/R21

Figure 1  
Maximum Forward Characteristics

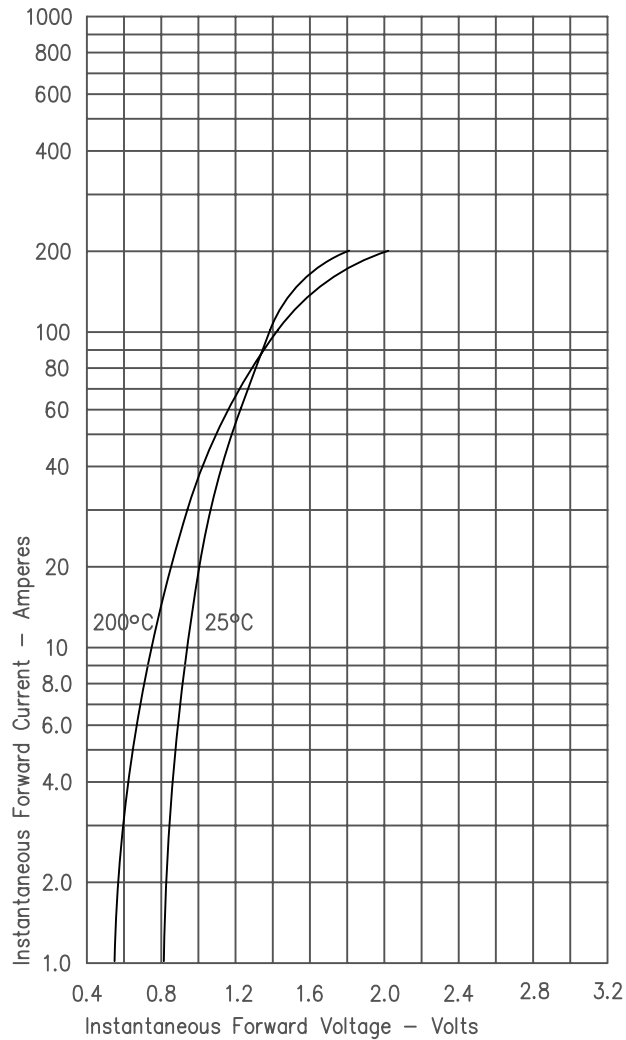


Figure 2  
Typical Reverse Characteristics

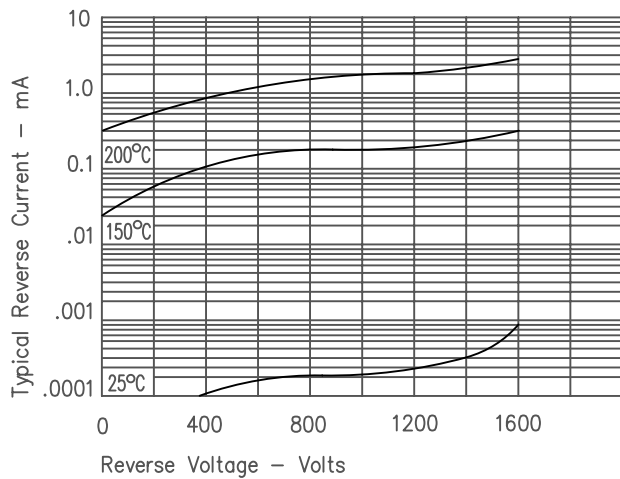


Figure 3  
Forward Current Derating

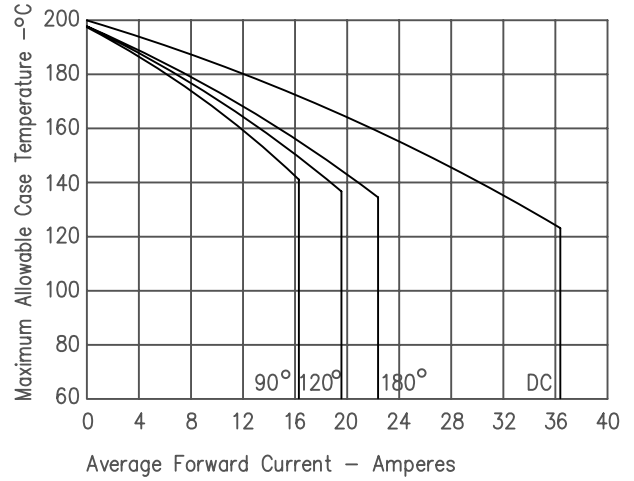


Figure 4  
Maximum Forward Power Dissipation


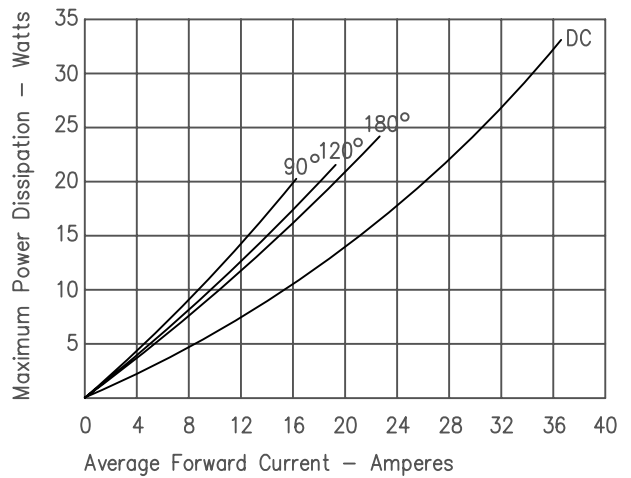


Figure 5  
Transient Thermal Impedance

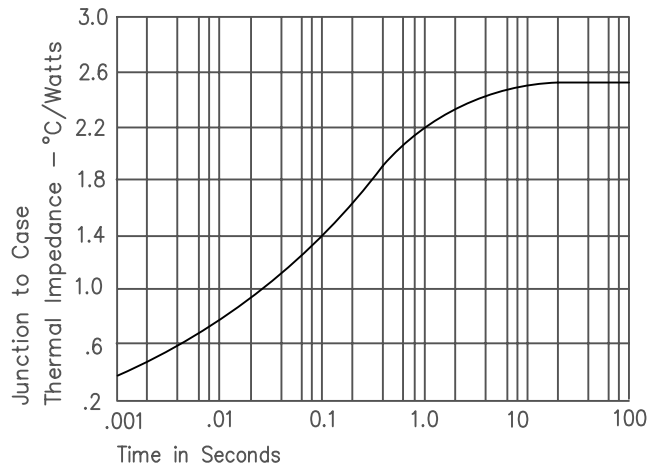

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[R21160](#) [R2180](#) [R21140](#) [1N5331](#) [S2180](#)