

|                       |       |                        |          |                |        |
|-----------------------|-------|------------------------|----------|----------------|--------|
| Messrs.               |       |                        |          |                |        |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.  |
|                       |       |                        | A        | August. 15, 17 | 1 / 20 |

**LIQUID CRYSTAL DISPLAY MODULE**  
**MODEL: NMTC-S16201XFYHSAY-10A**  
**Customer's No.:**

|            |
|------------|
| Acceptance |
|            |

*Microtips Technology Inc.*  
*12F. No.31 Lane 169, Kang Ning St.,*  
*His-Chih, Taipei Hsien, Taiwan, R.O.C.*  
*FAX: 886-2-26958625*

|                         |
|-------------------------|
| Approved and Checked by |
|                         |

| Approved by                                                                         | Checked by                                                                          |                                                                                      | Made by                                                                               |
|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |



***Microtips Technology Inc.***

|                       |       |                        |          |                       |               |
|-----------------------|-------|------------------------|----------|-----------------------|---------------|
| Messrs.               |       |                        |          |                       |               |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.         |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | <i>2 / 20</i> |

#### Revise Records

| Rev. | Date       | Contents   | Written  | Approved   |
|------|------------|------------|----------|------------|
| A.   | 2017/08/15 | See Note 1 | Jill Hsu | Danny Lien |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |
|      |            |            |          |            |

#### Special Notes

|         |                                        |
|---------|----------------------------------------|
| Note 1. | The LCD module is compliant with RoHS. |
| Note 2. |                                        |
| Note 3. |                                        |
| Note 4. |                                        |
| Note 5. |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |
|         |                                        |



*Microtips Technology Inc.*

|                       |       |                        |          |                       |               |
|-----------------------|-------|------------------------|----------|-----------------------|---------------|
| Messrs.               |       |                        |          |                       |               |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.         |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | <i>3 / 20</i> |

# Contents

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| <b>1. General Specifications</b>                                      | 4  |
| <b>2. Electrical Specifications</b>                                   | 5  |
| 2.1 Absolute Maximum Ratings                                          | 5  |
| 2.2 DC Characteristics                                                | 5  |
| 2.3 AC Characteristics                                                | 6  |
| 2.4 Lighting Specifications                                           | 8  |
| <b>3. Optical Specifications</b>                                      | 9  |
| 3.1 LCD Driving Voltage                                               | 9  |
| 3.2 Optical Characteristics                                           | 9  |
| 3.3 Definition of Viewing Angle and Optimum Viewing Area              | 10 |
| 3.4 Definition of Viewing Angle $\theta_f$ and $\theta_b$             | 10 |
| 3.5 Definition of Contrast C, $C = \text{Brightness of selected dot}$ | 10 |
| <b>4. I/O Terminal</b>                                                | 11 |
| 4.1 Pin Assignment                                                    | 11 |
| 4.2 Example of Power Supply                                           | 11 |
| 4.3 Block Diagram                                                     | 12 |
| <b>5. Reliability Test</b>                                            | 13 |
| 5.1 Test Item                                                         | 13 |
| 5.2 Judgment Standard                                                 | 14 |
| <b>6. Appearance Standards</b>                                        | 15 |
| 6.1 Inspection Conditions                                             | 15 |
| 6.2 Definition of Applicable Zones                                    | 15 |
| 6.3 Standards                                                         | 16 |
| <b>7. Handling and Precautions</b>                                    | 18 |
| <b>8. Warranty</b>                                                    | 19 |
| <b>9. Dimensional Outlines</b>                                        | 19 |



|                       |       |                        |          |                       |               |
|-----------------------|-------|------------------------|----------|-----------------------|---------------|
| Messrs.               |       |                        |          |                       |               |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.         |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | <i>4 / 20</i> |

**The Microtips Customized LCD module, model: NMTC-S16201XFYHSAY-10A is compliant with RoHS**

## **1. General Specifications**

|                        |   |                                                   |
|------------------------|---|---------------------------------------------------|
| Operating Temperature. | : | Min. -20°C ~ Max. 70°C                            |
| Storage Temperature.   | : | Min. -30°C ~ Max. 80°C                            |
| Display Format         | : | 16 characters x 2 lines                           |
| Display Fonts          | : | 5 x 7 dots + cursor ( 1 character )               |
| Viewing Area           | : | 99.0 (W) x 24.0 (H) mm                            |
| Outline Dimensions     | : | 122.0 (W) x 44.0 (H) x 14.0 max. (D) mm           |
| Weight                 | : | N/A                                               |
| LCD Type               | : | STN / Positive, Yellow Green Mode / Transflective |
| Viewing Direction      | : | 6:00                                              |
| Backlight              | : | Array type LED Backlight (Yellow – Green)         |
| LSI                    | : | ST 7066                                           |
| Drawings               | : | As attached drawings                              |



***Microtips Technology Inc.***

|                       |       |                        |          |                |        |
|-----------------------|-------|------------------------|----------|----------------|--------|
| Messrs.               |       |                        |          |                |        |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.  |
|                       |       |                        | A        | August. 15, 17 | 5 / 20 |

## 2. Electrical Specifications

### 2.1 Absolute Maximum Ratings

$V_{SS} = 0V$

| Parameter                  | Symbol            | Conditions | Min.            | Max.           | Units |
|----------------------------|-------------------|------------|-----------------|----------------|-------|
| Supply Voltage (Logic)     | $V_{DD} - V_{SS}$ | --         | - 0.3           | 7.0            | V     |
| Supply Voltage (LCD Drive) | $V_{LCD}$         | --         | $V_{DD} - 15.0$ | $V_{DD} + 0.3$ | V     |
| Input Voltage              | $V_I$             | --         | - 0.3           | $V_{DD} + 0.3$ | V     |

### 2.2 DC Characteristics

$T_a = 25^\circ C, V_{SS} = 0V$

| Parameter                   | Symbol            | Conditions               | Min. | Typ. | Max.     | Units |
|-----------------------------|-------------------|--------------------------|------|------|----------|-------|
| Supply Voltage (Logic)      | $V_{DD} - V_{SS}$ | --                       | 4.5  | --   | 5.5      | V     |
| Supply Voltage (LCD Drive)  | $V_{DD} - V_O$    | Shown in 3.1             |      |      |          | V     |
| High Level (Input Voltage)  | $V_{IH}$          | $V_{DD} = 5.0V$          | 2.2  | --   | $V_{DD}$ | V     |
| Low Level (Input Voltage)   | $V_{IL}$          | $V_{DD} = 5.0V$          | -0.3 | --   | 0.6      | V     |
| High Level (Output Voltage) | $V_{OH}$          | $I_{OH} = -0.205mA$      | 2.4  | --   | $V_{DD}$ | V     |
| Low Level (Output Voltage)  | $V_{OL}$          | $I_{OL} = 1.2mA$         | 0    | --   | 0.4      | V     |
| Supply Current              | $I_{DD}$          | $V_{DD} - V_{SS} = 5.0V$ | --   | 1.5  | 5.0      | mA    |

$T_a = 25^\circ C, V_{SS} = 0V$

| Parameter                   | Symbol            | Conditions               | Min.          | Typ. | Max.         | Units |
|-----------------------------|-------------------|--------------------------|---------------|------|--------------|-------|
| Supply Voltage (Logic)      | $V_{DD} - V_{SS}$ | --                       | 2.7           | --   | 4.5          | V     |
| Supply Voltage (LCD Drive)  | $V_{DD} - V_O$    | Shown in 3.1             |               |      |              | V     |
| High Level (Input Voltage)  | $V_{IH}$          | $V_{DD} = 3.0V$          | $0.7 V_{DD}$  | --   | $V_{DD}$     | V     |
| Low Level (Input Voltage)   | $V_{IL}$          | $V_{DD} = 3.0V$          | -0.3          | --   | 0.55         | V     |
| High Level (Output Voltage) | $V_{OH}$          | $I_{OH} = -0.1mA$        | $0.75 V_{DD}$ | --   | $V_{DD}$     | V     |
| Low Level (Output Voltage)  | $V_{OL}$          | $I_{OL} = 0.1mA$         | 0             | --   | $0.2 V_{DD}$ | V     |
| Supply Current              | $I_{DD}$          | $V_{DD} - V_{SS} = 5.0V$ | --            | 1.5  | 5.0          | mA    |



*Microtips Technology Inc.*

|                       |       |                        |          |                       |               |
|-----------------------|-------|------------------------|----------|-----------------------|---------------|
| Messrs.               |       |                        |          |                       |               |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.         |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | <i>6 / 20</i> |

### 2.3 AC Characteristics

$V_{DD} = 4.5V \sim 5.5V$

| Parameter               | Symbol           | Conditions | Min. | Max. | Units |
|-------------------------|------------------|------------|------|------|-------|
| Enable Cycle Time       | $t_{CYC}$        | Fig.1, 2   | 500  | --   | ns    |
| Enable Pulse Width      | $PW_{EH}$        | Fig.1, 2   | 230  | --   | ns    |
| Enable Rise / Fall Time | $t_{Er}, t_{Ef}$ | Fig.1, 2   | --   | 20   | ns    |
| Address Setup Time      | $t_{AS}$         | Fig.1, 2   | 40   | --   | ns    |
| Address Hold Time       | $t_{AH}$         | Fig.1, 2   | 10   | --   | ns    |
| Write Data Setup Time   | $t_{DSW}$        | Fig.1      | 80   | --   | ns    |
| Write Data Hold Time    | $t_{DHW}$        | Fig.1      | 10   | --   | ns    |
| Read Data Delay Time    | $t_{DDR}$        | Fig.2      | --   | 120  | ns    |
| Read Data Hold Time     | $t_{DHR}$        | Fig.2      | 5    | --   | ns    |


$V_{DD} = 2.7V \sim 4.5V$

| Parameter               | Symbol           | Conditions | Min. | Max. | Units |
|-------------------------|------------------|------------|------|------|-------|
| Enable Cycle Time       | $t_{CYC}$        | Fig.1, 2   | 1000 | --   | ns    |
| Enable Pulse Width      | $PW_{EH}$        | Fig.1, 2   | 450  | --   | ns    |
| Enable Rise / Fall Time | $t_{Er}, t_{Ef}$ | Fig.1, 2   | --   | 25   | ns    |
| Address Setup Time      | $t_{AS}$         | Fig.1, 2   | 60   | --   | ns    |
| Address Hold Time       | $t_{AH}$         | Fig.1, 2   | 20   | --   | ns    |
| Write Data Setup Time   | $t_{DSW}$        | Fig.1      | 195  | --   | ns    |
| Write Data Hold Time    | $t_{DHW}$        | Fig.1      | 10   | --   | ns    |
| Read Data Delay Time    | $t_{DDR}$        | Fig.2      | --   | 360  | ns    |
| Read Data Hold Time     | $t_{DHR}$        | Fig.2      | 5    | --   | ns    |




*Microtips Technology Inc.*

|                       |       |                        |          |                |        |
|-----------------------|-------|------------------------|----------|----------------|--------|
| Messrs.               |       |                        |          |                |        |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.  |
|                       |       |                        | A        | August. 15, 17 | 7 / 20 |

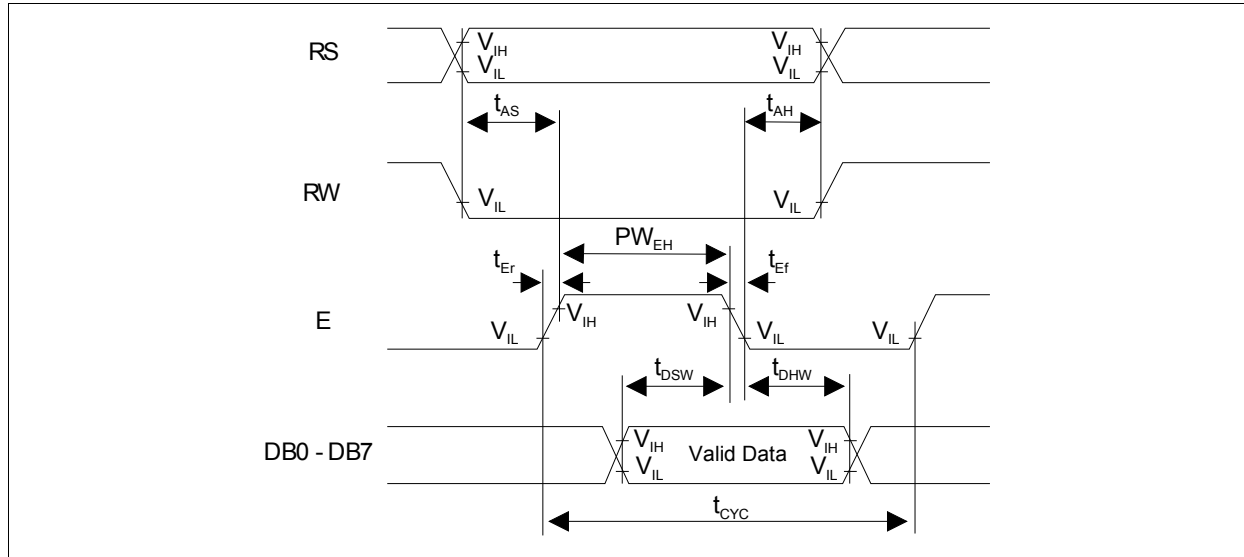

**Fig.1 Write Operation Timing**

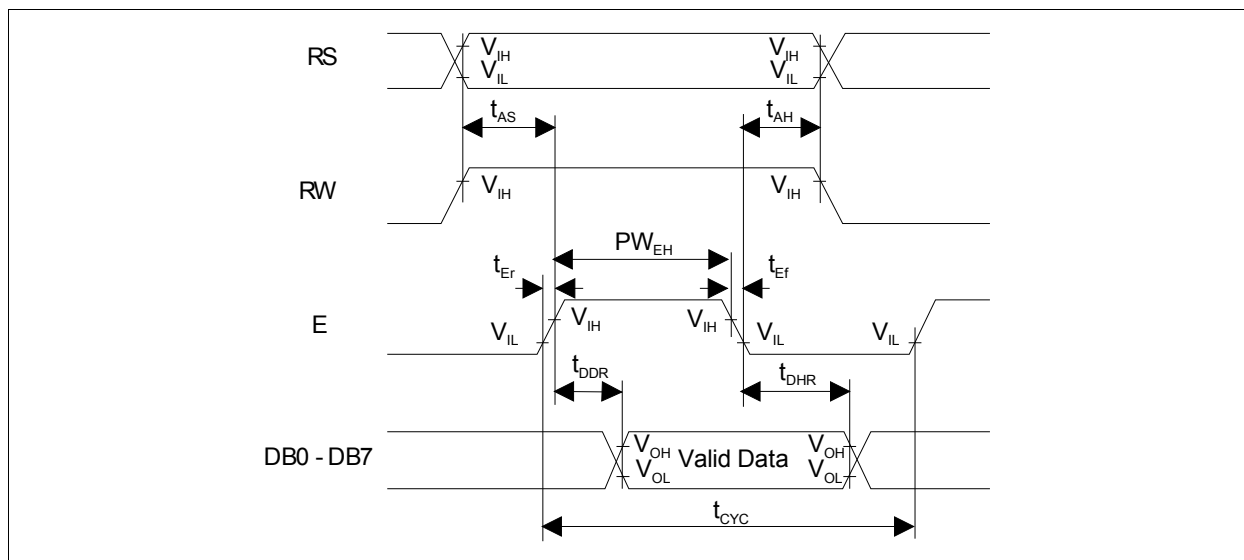

**Fig.2 Read Operation Timing**



**Microtips Technology Inc.**

|                       |       |                        |          |                       |               |
|-----------------------|-------|------------------------|----------|-----------------------|---------------|
| Messrs.               |       |                        |          |                       |               |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.         |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | <i>8 / 20</i> |

## 2.4 Lighting Specifications

### 2.4.1 Absolute Maximum Ratings

Ta = 25°C

| Parameter             | Symbol         | Conditions | Max.  | Units |
|-----------------------|----------------|------------|-------|-------|
| Forward Current       | I <sub>F</sub> | --         | 520   | mA    |
| Reverse Voltage       | V <sub>R</sub> | --         | 10.0  | V     |
| LED Power Dissipation | P <sub>D</sub> | --         | 2.496 | W     |

### 2.4.2 Operating Characteristics

Ta = 25°C

| Parameter                            | Symbol         | Conditions             | Min. | Typ. | Max. | Units             |
|--------------------------------------|----------------|------------------------|------|------|------|-------------------|
| Forward Voltage                      | V <sub>F</sub> | I <sub>F</sub> = 260mA | --   | 4.2  | 4.8  | V                 |
| Peak Emission Wavelength<br>(Note 1) | λ <sub>P</sub> | I <sub>F</sub> = 260mA | 570  | 573  | 575  | nm                |
| Luminance of Backlight Surface       | L              | I <sub>F</sub> = 260mA | 130  | 230  | --   | cd/m <sup>2</sup> |
| Luminous Tolerance                   | --             | I <sub>F</sub> = 260mA | 75   | --   | --   | %                 |
| Spectral Line Half width             | △λ             | I <sub>F</sub> = 260mA | --   | 26   | --   | nm                |
| Chromaticity Coordinates             | X              | I <sub>F</sub> = 260mA | 0.43 | 0.46 | 0.49 | --                |
|                                      | Y              | I <sub>F</sub> = 260mA | 0.55 | 0.52 | 0.49 | --                |

Note 1: Luminance tolerance = (Max. - Min. / Max.) x 100%



*Microtips Technology Inc.*

|                       |       |                        |          |                |        |
|-----------------------|-------|------------------------|----------|----------------|--------|
| Messrs.               |       |                        |          |                |        |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.  |
|                       |       |                        | A        | August. 15, 17 | 9 / 20 |

### 3. Optical Specifications

#### 3.1 LCD Driving Voltage

| Parameter                              | Symbol         | Conditions  | Min. | Typ. | Max. | Units |
|----------------------------------------|----------------|-------------|------|------|------|-------|
| Recommended LCD Driving Voltage Note 1 | $V_{DD} - V_O$ | Ta = -20 °C | 4.76 | 4.91 | 5.06 | V     |
|                                        |                | Ta = 25 °C  | 3.95 | 4.07 | 4.19 | V     |
|                                        |                | Ta = 70 °C  | 3.37 | 3.47 | 3.57 | V     |

Note 1: Voltage (Applied actual waveform to LCD) for the best contrast. The range of minimum and maximum shows tolerance of the operating voltage. The specified contrast ratio and response time are not guaranteed over the entire range.

#### 3.2 Optical Characteristics

Ta = 25 °C, 1/16 Duty, 1/5 Bias,  $V_{DD} = 5.0V$  (Note 4),  $\theta = 0^\circ$ ,  $\phi = 270^\circ$

| Parameter                       | Symbol       | Conditions                               | Min. | Typ. | Max. | Units |
|---------------------------------|--------------|------------------------------------------|------|------|------|-------|
| Contrast Ratio Note 1           | CR           | $\theta = 0^\circ$ , $\phi = 0^\circ$    | --   | 9.8  | --   | --    |
| Viewing Angle<br>(Shown in 3.3) | Front – Back | $\theta_f - \theta_b$ , $\phi = 0^\circ$ | -55  | to   | +50  | deg.  |
|                                 | Left – Right | $\theta_l - \theta_r$ , $\phi = 0^\circ$ | -35  | to   | +35  | deg.  |
| Response Time                   | Rise Note 2  | $T_{ON}$                                 | --   | 250  | 750  | ms    |
|                                 | Decay Note 3 | $T_{OFF}$                                | --   | 300  | 900  | ms    |

Note 1: Contrast ratio is defined as follows.

$$CR = L_{OFF} / L_{ON}$$

$L_{ON}$ : Luminance of the ON segments,  $L_{OFF}$ : Luminance of the OFF segments


Note 2: The time that the luminance level reaches 90% of the saturation level from 0% when ON signal is applied.

Note 3: The time that the luminance level reaches 10% of the saturation level from 100% when OFF signal is applied.

Note 4: Definition of Driving Voltage  $V_D$ . Assuming that the typical driving waveforms shown below are applied to the LCD Panel at / A Duty – 1/B Bias ( A: Duty Number, B: Bias Number ). Driving voltage  $V_D$  is defined as follows:  $V_D = (V_{th1} + V_{th2}) / 2$

$V_{th1}$ : The voltage VO-P that should provide 50% of the saturation level in the luminance at the segment which the ON signal is applied to.


$V_{th2}$ : The voltage VO-P that should provide 50% of the saturation level in the luminance at the segment which the OFF signal is applied to.

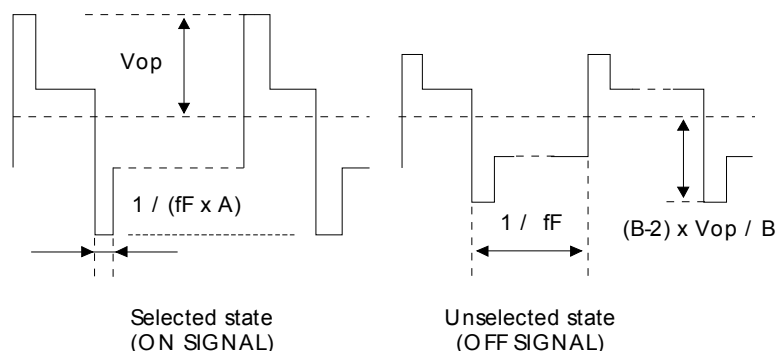


**Microtips Technology Inc.**

|                       |       |                        |          |                |         |
|-----------------------|-------|------------------------|----------|----------------|---------|
| Messrs.               |       |                        |          |                |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.   |
|                       |       |                        | A        | August. 15, 17 | 10 / 20 |

### 3.3 Definition of Viewing Angle and Optimum Viewing Area

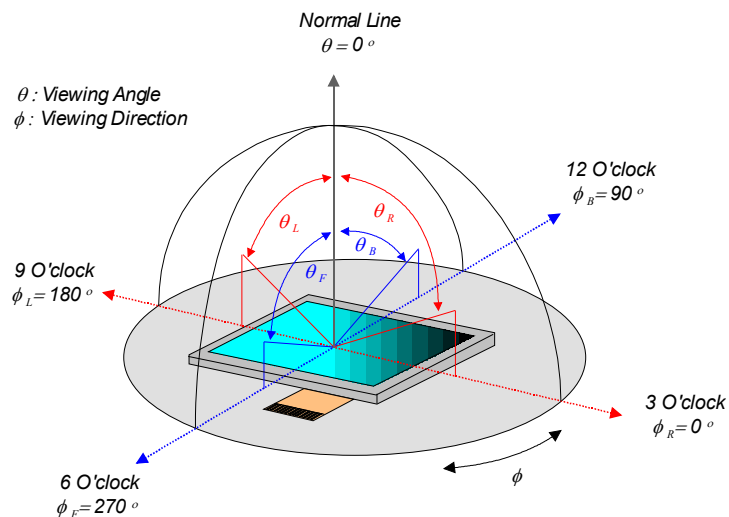


### 3.4 Definition of Viewing Angle $\theta_f$ and $\theta_b$

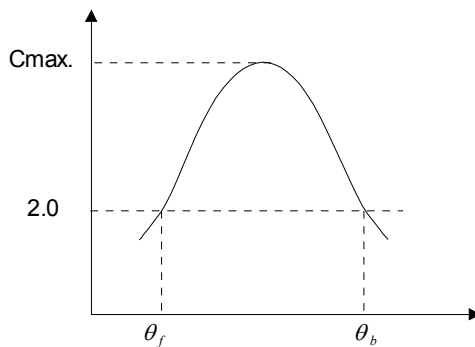

Optimum viewing angle with the naked eye and viewing angle  $\theta$  at Cmax.  
Above are not always the same.

### 3.5 Definition of Contrast C, $C = \text{Brightness of selected dot (B1)} / \text{Brightness of unselected dot (B2)}$

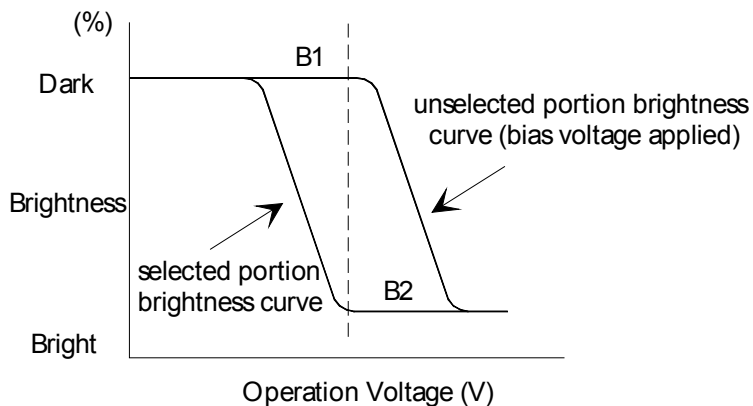

**Microtips Technology Inc.**

|                       |       |                        |          |                |         |
|-----------------------|-------|------------------------|----------|----------------|---------|
| Messrs.               |       |                        |          |                |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.   |
|                       |       |                        | A        | August. 15, 17 | 11 / 20 |

## 4. I/O Terminal

### 4.1 Pin Assignment

CN1


| No. | Symbol   | Level | Function                                              |
|-----|----------|-------|-------------------------------------------------------|
| 1.  | VSS      | --    | Power Supply (0V, GND)                                |
| 2.  | VDD      | --    | Power Supply for Logic                                |
| 3.  | VEE (Vo) | --    | Power Supply for LCD Drive                            |
| 4.  | RS       | H / L | Register Select Signal                                |
| 5.  | R/W      | H / L | Read / Write Select Signal H: Read L: Write           |
| 6.  | E        | H / L | Enable Signal (No pull – up Resister)                 |
| 7.  | DB0      | H / L | Data Bus Line / Non – connection at 4 – bit operation |
| 8.  | DB1      | H / L | Data Bus Line / Non – connection at 4 – bit operation |
| 9.  | DB2      | H / L | Data Bus Line / Non – connection at 4 – bit operation |
| 10. | DB3      | H / L | Data Bus Line / Non – connection at 4 – bit operation |
| 11. | DB4      | H / L | Data Bus Lin                                          |
| 12. | DB5      | H / L | Data Bus Line                                         |
| 13. | DB6      | H / L | Data Bus Line                                         |
| 14. | DB7      | H / L | Data Bus Line                                         |
| 15. | LEDA     | --    | Power Supply for Backlight / LED Anode (+)            |
| 16. | LEDK     | --    | Power Supply for Backlight / LED Cathode (-)          |

CN2

|       |
|-------|
| LED A |
| LED K |

### 4.2 Example of Power Supply

It is recommended to apply a potentiometer for the contrast adjust due to the tolerance of the driving voltage and its temperature dependence.

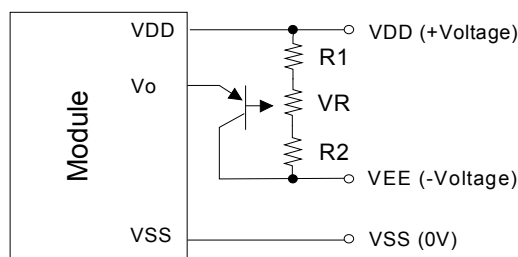

$$R1+R2+VR=10 \sim 20K\Omega$$


$$Tr=2SA1202 \text{ or equivalent}$$



*Microtips Technology Inc.*

|                       |       |                        |          |                       |         |
|-----------------------|-------|------------------------|----------|-----------------------|---------|
| Messrs.               |       |                        |          |                       |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.   |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | 12 / 20 |

#### 4.3 Block Diagram

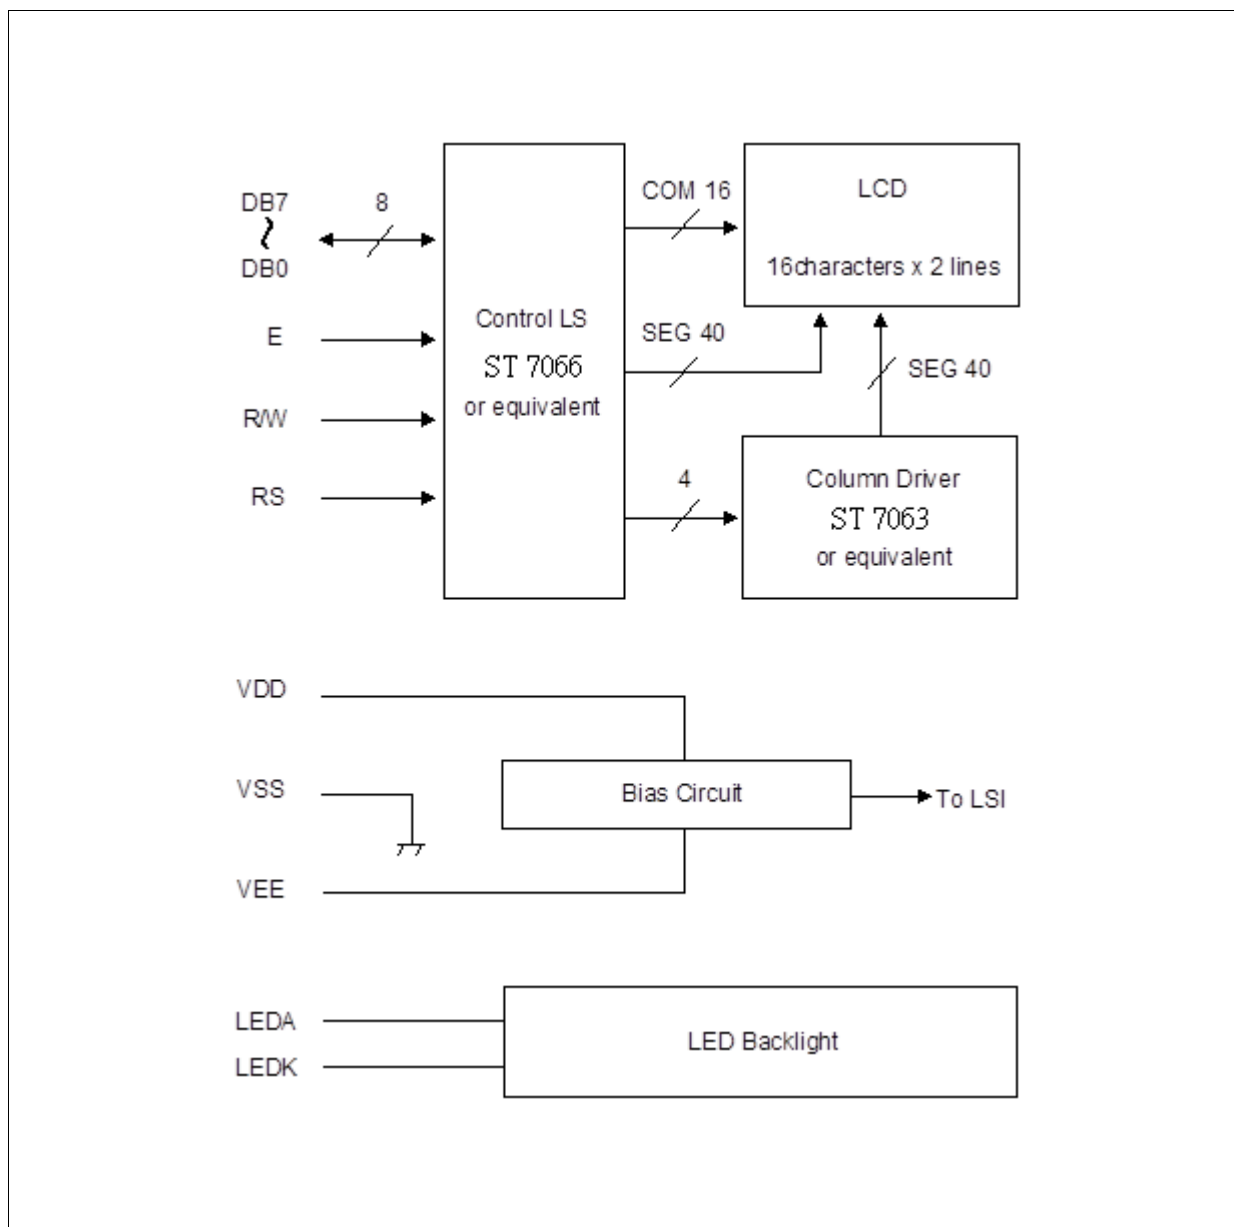


|                       |       |                        |          |                |         |
|-----------------------|-------|------------------------|----------|----------------|---------|
| Messrs.               |       |                        |          |                |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.   |
|                       |       |                        | A        | August. 15, 17 | 13 / 20 |

## 5. Reliability Test

### 5.1 Test Item

No change on display and in operation under the following test condition.

| No. | Test Item                    | Description                                                                                                                                                                                                                                                                                                                                                      | Condition                     | Note |
|-----|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|------|
| 1.  | High Temperature (Operation) | Durability test under long time high temperature with electrical stress (voltage, current)                                                                                                                                                                                                                                                                       | 70°C ± 2°C 96hrs              | --   |
| 2.  | High Temperature (Storage)   | Durability test under long time high temperature storage                                                                                                                                                                                                                                                                                                         | 80°C ± 2°C 96hrs              | 4    |
| 3.  | Low Temperature (Operation)  | Durability test under long time low temperature with electrical stress (voltage, current)                                                                                                                                                                                                                                                                        | -20°C ± 2°C, 96hrs            | 3    |
| 4.  | Low Temperature (Storage)    | Durability test under long time low temperature storage                                                                                                                                                                                                                                                                                                          | -30°C ± 2°C, 96hrs            | 3, 4 |
| 5.  | Damp Proof Test              | Durability test under long time high temperature and high humidity                                                                                                                                                                                                                                                                                               | 40°C ± 2°C, 90 ~ 95% RH 96hrs | 3, 4 |
| 6.  | Vibration Test               | Total fixed amplitude: 1.5mm<br>Vibration frequency: 10~55Hz<br>One cycle 60 seconds to 3 directions of X, Y, Z for each 15 minutes                                                                                                                                                                                                                              | --                            | 5    |
| 7.  | Drop Test                    | <p>To be measured after dropping from 60cm high on the concrete surface in packing state.</p> <div><p><i>Dropping method corner dropping</i><br/>A corner: once</p><p><i>Edge dropping</i><br/>B, C, D edge: once</p><p><i>Face dropping</i><br/>E, F, G face: once</p></div> | --                            |      |

Note 1: Unless otherwise specified, tests will be conducted under the following condition,

Temperature : 25°C ± 2°C

Humidity : 65% ± 5%

Note 2: Unless otherwise specified, tests will be not conducted under functioning state.

Note 3: No dew condensation to be observed.

Note 4: The function test shall be conducted after 4 hours storage at the normal temperature and humidity after removed from the test chamber.

Note 5: Vibration test will be conducted to the product itself without putting it in a container.



**Microtips Technology Inc.**

|                       |       |                        |          |                       |         |
|-----------------------|-------|------------------------|----------|-----------------------|---------|
| Messrs.               |       |                        |          |                       |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.   |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | 14 / 20 |

## 5.2 Judgment Standard

| Failure Mode         | Test Item |   |   |   |   |   |   | Judgment Standard                                                                  |
|----------------------|-----------|---|---|---|---|---|---|------------------------------------------------------------------------------------|
|                      | 1         | 2 | 3 | 4 | 5 | 6 | 7 |                                                                                    |
| Orientation          | *         | * | * | * | * |   |   | No remarkable degradation of appearance under bias / non-bias condition            |
| Current Value (IAC)  | *         | * | * | * | * |   |   | No remarkable increase                                                             |
| Contrast             | *         |   | * | * | * |   |   | No remarkable poor contrast                                                        |
| Domain               | *         | * | * | * | * |   |   | Less than 20% of all dots have reverse tilt of more than on third of one dot area. |
| Bubble (Inside Cell) | *         | * | * | * | * | * |   | As per “Appearance Standard” (Note. Including one which disappear after 25°C 2H)   |
| Polarizer            | *         |   |   |   | * | * |   | As per “Appearance Standard” no remarkable appearance change                       |
| Glass Damage         |           |   |   |   |   |   | * | As per “Appearance Standard”                                                       |

Note. 1. \* is strong linkage between Failure Mode and Test Item.

2. Number of Test Item should be referred to former page.

3. Judgment and Standard value should be fixed by other inspection standard and criteria samples.




*Microtips Technology Inc.*

|                       |       |                        |          |                |         |
|-----------------------|-------|------------------------|----------|----------------|---------|
| Messrs.               |       |                        |          |                |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.   |
|                       |       |                        | A        | August. 15, 17 | 15 / 20 |


## 6. Appearance Standards

### 6.1 Inspection Conditions

The LCD shall be inspected under 40W white fluorescent light. The distance between the eyes and the sample shall be more than 30cm. All directions for inspecting the sample should be within 45° against perpendicular line.

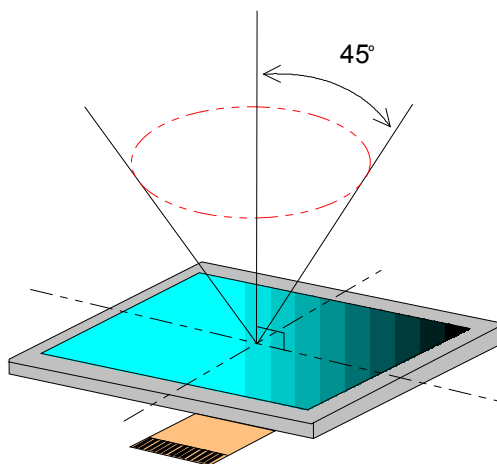

### 6.2 Definition of Applicable Zones

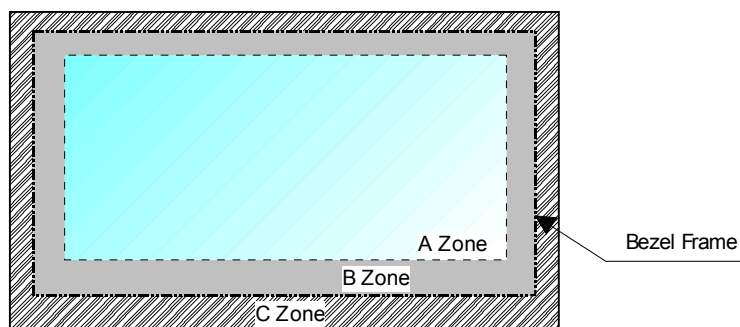

A Zone: Active display area

B Zone: Area from outside of "A Zone" to validity viewing area

C Zone: Rest parts

A Zone + B Zone = Validity viewing area



*Microtips Technology Inc.*

|                       |       |                        |          |                |         |
|-----------------------|-------|------------------------|----------|----------------|---------|
| Messrs.               |       |                        |          |                |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.   |
|                       |       |                        | A        | August. 15, 17 | 16 / 20 |

### 6.3 Standards





| No.                                 | Parameter                                  | Criteria                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|-------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|-------------------|-------------------|-------------------|---|---|---|---------|----|----------|---|---------------|---|---------|----------|----------------|---|---|---------|----------------|---|---|---|---------|---------|---------------------|---|--|
| 1.                                  | Black and White Spots, Foreign Substances  | (1) Round Shape                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | <table><tr><th rowspan="2">Zone<br/>Dimension (mm)</th><th colspan="3">Acceptable Number</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>D ≤ 0.1</td><td>*</td><td>*</td><td>*</td></tr><tr><td>0.1 &lt; D ≤ 0.2</td><td>3</td><td>5</td><td>*</td></tr><tr><td>0.2 &lt; D ≤ 0.25</td><td>2</td><td>3</td><td>*</td></tr><tr><td>0.25 &lt; D ≤ 0.3</td><td>0</td><td>1</td><td>*</td></tr><tr><td>0.3 &lt; D</td><td>0</td><td>0</td><td>*</td></tr></table>           | Zone<br>Dimension (mm) | Acceptable Number |                   |                   | A | B | C | D ≤ 0.1 | *  | *        | * | 0.1 < D ≤ 0.2 | 3 | 5       | *        | 0.2 < D ≤ 0.25 | 2 | 3 | *       | 0.25 < D ≤ 0.3 | 0 | 1 | * | 0.3 < D | 0       | 0                   | * |  |
|                                     |                                            | Zone<br>Dimension (mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                        | Acceptable Number |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | A                      | B                 | C                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | D ≤ 0.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | *                      | *                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | 0.1 < D ≤ 0.2                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 3                      | 5                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | 0.2 < D ≤ 0.25                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 2                      | 3                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | 0.25 < D ≤ 0.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 0                      | 1                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | 0.3 < D                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0                      | 0                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | D = (Long + Short) / 2    *: Disregard                                                                                                                                                                                                                                                                                                                                                                                                                                         |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | (2) Line Shape                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | <table><tr><th rowspan="2">Zone<br/>X (mm)</th><th rowspan="2">Zone<br/>Y (mm)</th><th colspan="3">Acceptable Number</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>--</td><td>0.03 ≥ W</td><td>*</td><td>*</td><td>*</td></tr><tr><td>2.0 ≥ L</td><td>0.05 ≥ W</td><td>3</td><td>3</td><td>*</td></tr><tr><td>1.0 ≥ L</td><td>0.1 ≥ W</td><td>3</td><td>3</td><td>*</td></tr><tr><td>--</td><td>0.1 &lt; W</td><td colspan="3">In the same way (1)</td></tr></table> | Zone<br>X (mm)         | Zone<br>Y (mm)    | Acceptable Number |                   |   | A | B | C       | -- | 0.03 ≥ W | * | *             | * | 2.0 ≥ L | 0.05 ≥ W | 3              | 3 | * | 1.0 ≥ L | 0.1 ≥ W        | 3 | 3 | * | --      | 0.1 < W | In the same way (1) |   |  |
|                                     |                                            | Zone<br>X (mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                        |                   | Zone<br>Y (mm)    | Acceptable Number |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | A                      | B                 |                   | C                 |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| --                                  | 0.03 ≥ W                                   | *                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | *                      | *                 |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| 2.0 ≥ L                             | 0.05 ≥ W                                   | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3                      | *                 |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| 1.0 ≥ L                             | 0.1 ≥ W                                    | 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 3                      | *                 |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| --                                  | 0.1 < W                                    | In the same way (1)                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| X: Length   Y: Width   *: Disregard |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| Total defects shall not exceed 5.   |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| 2.                                  | Air Bubbles<br>(between glass & polarizer) | <table><tr><th rowspan="2">Zone<br/>Dimension (mm)</th><th colspan="3">Acceptable Number</th></tr><tr><th>A</th><th>B</th><th>C</th></tr><tr><td>D ≤ 0.3</td><td>*</td><td>*</td><td>*</td></tr><tr><td>0.3 &lt; D ≤ 0.4</td><td>3</td><td>*</td><td>*</td></tr><tr><td>0.4 &lt; D ≤ 0.6</td><td>2</td><td>3</td><td>*</td></tr><tr><td>0.6 &lt; D</td><td>0</td><td>0</td><td>*</td></tr></table>                                                                             | Zone<br>Dimension (mm) | Acceptable Number |                   |                   | A | B | C | D ≤ 0.3 | *  | *        | * | 0.3 < D ≤ 0.4 | 3 | *       | *        | 0.4 < D ≤ 0.6  | 2 | 3 | *       | 0.6 < D        | 0 | 0 | * |         |         |                     |   |  |
|                                     |                                            | Zone<br>Dimension (mm)                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                        | Acceptable Number |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | A                      | B                 | C                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | D ≤ 0.3                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | *                      | *                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | 0.3 < D ≤ 0.4                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 3                      | *                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | 0.4 < D ≤ 0.6                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2                      | 3                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | 0.6 < D                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 0                      | 0                 | *                 |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            | *: Disregard                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
| Total defects shall not exceed 3.   |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |
|                                     |                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                        |                   |                   |                   |   |   |   |         |    |          |   |               |   |         |          |                |   |   |         |                |   |   |   |         |         |                     |   |  |

To be continued.....



*Microtips Technology Inc.*

|                       |       |                        |          |                |         |
|-----------------------|-------|------------------------|----------|----------------|---------|
| Messrs.               |       |                        |          |                |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.   | Page.   |
|                       |       |                        | A        | August. 15, 17 | 17 / 20 |

| No. | Parameter                                            | Criteria                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-----|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 3.  | The Shape of Dot                                     | <p>(1) Dot Shape (with Dent)</p>  <p>0.15 ≥</p> <p>As per the sketch of left hand.</p> <p>(2) Dot Shape (with Projection)</p>  <p>Should not be connected to next dot.</p> <p>(3) Pin Hole</p>  <p><math>(X + Y) / 2 \leq 0.2\text{mm}</math> (Less than 0.1mm is no counted.)</p> <p>(4) Deformation</p>  <p><math>(X + Y) / 2 \leq 0.2\text{mm}</math></p> <p>Total acceptable number: 1/dot, 5/cell<br/>(Defect number of (4): 1pc.)</p> |
| 4.  | Polarizer Scratches                                  | Not to be conspicuous defects.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 5.  | Polarizer Dirt's                                     | If the stains are removed easily from LCDP surface, the module is not defective.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| 6.  | Complex Foreign Substance Defects                    | Black spots, line shaped foreign substance or air bubbles between glass & polarizer should be 5pcs maximum in total.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 7.  | Distance between different Foreign Substance defects | $D \leq 0.2$ : 20mm or more<br>$0.2 < D$ : 40mm or more                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |



|                       |       |                        |          |                       |         |
|-----------------------|-------|------------------------|----------|-----------------------|---------|
| Messrs.               |       |                        |          |                       |         |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.   |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | 18 / 20 |

## 7. Handling and Precautions

The Following precautions will guide you in handling our product correctly.

- 1 Liquid crystal display devices
  - 1.1 The liquid crystal display device panel used in the liquid crystal display module is made of plate glass. Avoid any strong mechanical shock. Should the glass break handle it with care.
  - 1.2 The polarizer adhering to the surface of the LCD is made of a soft material. Guard against scratching it.
- 2 Care of the liquid crystal display module against static electricity discharge.
  - 2.1 When working with the module, be sure to ground your body and any electrical equipment you may be using. We strongly recommend the use of anti static mats ( made of rubber ), to protect work tables against the hazards of electrical shock.
  - 2.2 Avoid the use of work clothing made of synthetic fibers. We recommend cotton clothing or other conductivity-treated fibers.
  - 2.3 Slowly and carefully remove the protective film from the LCD module, since this operation can generate static electricity.
- 3 When the LCD module alone must be stored for long periods of time:
  - 3.1 Protect the modules from high temperature and humidity.
  - 3.2 Keep the modules out of direct sunlight or direct exposure to ultra-violet rays.
  - 3.3 Protect the modules from excessive external forces.
- 4 Use the module with a power supply that is equipped with an over current protector circuit, since the module is not provided with this protective feature.
- 5 Do not ingest the LCD fluid itself should it leak out of a damaged LCD module. Should hands or clothing come in contact with LCD fluid, wash immediately with soap.
- 6 Conductivity is not guaranteed for models that use metal holders where solder connections between the metal holder and the PCB are not used. Please contact us to discuss appropriate ways to assure conductivity.



*Microtips Technology Inc.*

|                       |       |                        |          |                       |                |
|-----------------------|-------|------------------------|----------|-----------------------|----------------|
| Messrs.               |       |                        |          |                       |                |
| Product Specification | Model | NMTC-S16201XFYHSAY-10A | Rev. No. | Issued Date.          | Page.          |
|                       |       |                        | <i>A</i> | <i>August. 15, 17</i> | <i>19 / 20</i> |

## 8. Warranty

This product has been manufactured to your company's specifications as a part for use in your company's general electronic products. It is guaranteed to perform according to delivery specifications. For any other use apart from general electronic equipment, we cannot take responsibility if the product is used in medical devices, nuclear power control equipment, aerospace equipment, fire and security systems, or any other applications in which there is a direct risk to human life and where extremely high levels of reliability are required. If the product is to be used in any of the above applications, we will need to enter into a separate product liability agreement.

- 1 13 months guarantee starts from the date code.
- 2 We cannot accept responsibility for any defect, which may arise from additional manufacturing of the product (including disassembly and reassembly), after product delivery.
- 3 We cannot accept responsibility for any defect, which may arise after the application of strong external force to the product.
- 4 We cannot accept responsibility for any defect, which may arise due to the application of static electricity after the product has passed your company's acceptance inspection procedures.
- 5 We cannot accept responsibility for industrial property, which may arise through the use of your product, with exception to those issues relating directly to the structure or method of manufacturing of our product. Microtips-origin longer than one year from Microtips production.

## 9. Dimensional Outlines

- See the next page.....



*Microtips Technology Inc.*

Technical drawing of a Microtips Technology M-16201XH component. The drawing includes a top view, a side view, and a detail view of the pin array. Dimensions are provided in millimeters (mm) and inches (in). The top view shows a rectangular component with a central pin array of 16 pins (8 rows by 2 columns). The side view shows the component's profile with a maximum height of 14mm. The detail view shows the pin array with dimensions for pin pitch, pin width, and pin height. The drawing is labeled with 'M-16201XH' and 'Microtips Technology'.

Note:  
1. Otherwise specified:  $\pm 0.4$   
2. Pin 15, 16 must jump to exchange A K.

| PIN ASSIGNMENT(CN1) |        |         |          | PIN ASSIGNMENT(CN2) |  |  |  |
|---------------------|--------|---------|----------|---------------------|--|--|--|
| 1. Vss              | 5. R/W | 9. DB2  | 13. DB6  | LED A               |  |  |  |
| 2. Vdd              | 6. E   | 10. DB3 | 14. DB7  | LED K               |  |  |  |
| 3. Vee              | 7. DB0 | 11. DB4 | 15. LEDA |                     |  |  |  |
| 4. RS               | 8. DB1 | 12. DB5 | 16. LEDK |                     |  |  |  |

| M-16201XH |  | Q'TY                  |  | DATE:                                                             |  | MATERIAL                       |  |
|-----------|--|-----------------------|--|-------------------------------------------------------------------|--|--------------------------------|--|
| PART NAME |  | APP'D                 |  | UNIT: MM                                                          |  | SCALE: 1/1                     |  |
| DRAWN     |  | CHECK                 |  | UNLESS OTHERWISE SPECIFIED TOLERANCE ON FRACTIONS DECIMALS ANGLES |  | PRODUCT: MTC-16201X(H)         |  |
| Card      |  | MTRD Jeffrey 09/22/04 |  | 0.10 0.5°                                                         |  | DWG NO.: C16201X1              |  |
|           |  |                       |  |                                                                   |  | FILE: Design\LCM\MTC-16201X\2D |  |
|           |  |                       |  |                                                                   |  | SHEET 1 / 1                    |  |
|           |  |                       |  |                                                                   |  | Rev: C                         |  |

Note:

1. Otherwise specified:  $\pm 0.4$
2. Pin 15, 16 must jump to exchange A K.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microtips Technology:](#)

[NMTC-S16201XFYHSAY-10A](#)