


Magneto 14 Click

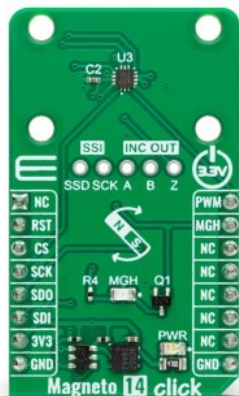

PID: MIKROE-5751

Magneto 14 Click is a compact add-on board with an accurate and reliable magnetic device. This board features the [MA735](#), a contactless angle sensor with ABZ, and PWM output from [Monolithic Power Systems](#). The MA735 sensor has a 9-bit to 13-bit resolution of the absolute angle encoder. With its fast data acquisition and processing, it provides accurate angle measurements at speeds from 0rpm to 60.000rpm. The sensor can be used in both end-to-shaft and off-axis (side-shaft mounting) configurations. This Click board™ makes the perfect solution for the development of applications for automotive angle sensing, robotics, high-resolution angle encoders, and general-purpose angle measurements.

NOTE: Rotary Magnetic Holder does not come in the same package as this Click board™, but you can find it in our [shop](#).

How does it work?

Magneto 14 Click is based on the MA735, a contactless angle sensor with ABZ and PWM output from Monolithic Power Systems. It can detect an absolute angular position of a permanent magnet, typically a diametrically magnetized cylinder on a rotating shaft. The adjustable digital filtering can optimize control loop performance when used in servo applications. In addition, the sensor features magnetic field strength detection with a programmable threshold and on-chip non-volatile memory. This memory can store configuration parameters, including magnetic field detection thresholds, ABZ encoder settings, and reference zero-angle positions. The frequency of the PWM output of the sensor is up to 1090Hz with a 14-bit resolution.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

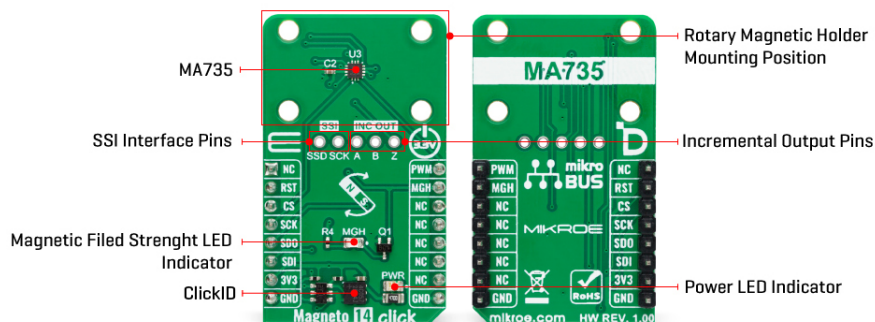

The MA735 uses integrated Hall devices to detect the magnetic field, while the angle is measured using MPS's proprietary Spinaxis™ method. This method is based on phase detection and digitizes the direction of the field directly, generating a sinusoidal signal with a phase that represents the angle of the field. The angle is obtained from a signal by a time-to-digital converter, and the digital number proportional to the magnetic field is delivered at a rate of 1MHz.

Two headers on this Click board™ allow additional functionalities. The SSI header with SSD and SCK pins is a 2-Wire synchronous serial interface for data reading only and can be used for angle reading operation. The INC OUT header is an incremental output encoder with A, B, and Z pins. The ABZ encoder emulates a 12-bit incremental encoder (like an optical encoder), providing logic pulses per turn from 1 to 1024 in quadrature.

A unique addition to this board is a position for a [Rotary Magnetic Holder](#) designed to be used alongside a magnetic contactless angle sensor allowing fast prototyping and quick measurements during development. Rotary Magnetic Holder does not come in the same package as this Click board™, but you can find it in our shop.

The Magneto 14 Click uses a standard 4-Wire SPI serial interface with a maximum supported clock rate of 25MHz. The PWM absolute output provides a logic signal with a duty cycle proportional to the angle of the magnetic field on the pin PWM of the mikroBUS™ socket. This sensor has two thresholds, MGL and MGH, for low and high magnetic fields. The magnetic field high threshold (MFHT) is indicated over the MGH interrupt pin, together with an additional MGH red LED.

This Click board™ can only be operated with a 3.3V logic voltage level. The board must perform appropriate logic voltage level conversion before using MCUs with different logic levels. However, the Click board™ comes equipped with a library containing functions and an example code that can be used, as a reference, for further development.

Specifications

Type	Magnetic
Applications	Can be used for the development of applications for automotive angle sensing, robotics, high-resolution angle encoders, and general-purpose angle measurements

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.




ISO 9001: 2015 certification of quality management system (QMS).

On-board modules	MA735 - contactless angle sensor with ABZ, and PWM output from Monolithic Power Systems
Key Features	Low power consumption, highest reliability and durability, high-resolution output, operates with wide magnetic range, programmable thresholds, non-volatile memory, SSI and ABZ encoder functionalities, PWM output, and more
Interface	PWM,SPI
Feature	ClickID
Compatibility	mikroBUS™
Click board size	M (42.9 x 25.4 mm)
Input Voltage	3.3V

Pinout diagram

This table shows how the pinout on Magneto 14 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	PWM	PWM Output
ID SEL	RST	2	RST	INT	15	MGH	Magnetic Field High Threshold
SPI Select / ID COMM	CS	3	CS	RX	14	NC	
SPI Clock	SCK	4	SCK	TX	13	NC	
SPI Data OUT	SDO	5	MISO	SCL	12	NC	
SPI Data IN	SDI	6	MOSI	SDA	11	NC	
Power Supply	3.3V	7	3.3V	5V	10	NC	
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
LD2	MGH	-	Magnetic Field High Threshold LED Indicator

Magneto 14 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	-	3.3	-	V
Rotation Speed Measurement	0	-	60.000	RPM
Applied Magnetic Field	-	60	-	mT
Absolute Output Resolution	9	-	13	bit
PWM Resolution	13	13.8	14	bit

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Software Support

We provide a library for the Magneto 14 Click as well as a demo application (example), developed using MIKROE [compilers](#). The demo can run on all the main MIKROE [development boards](#).

Package can be downloaded/installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Library Description

This library contains API for Magneto 14 Click driver.

Key functions

- `magneto14_get_angle` Magneto 14 gets the angular position function.
- `magneto14_get_field_strength` Magneto 14 gets the magnetic field strength function.
- `magneto14_get_mgh` Magneto 14 gets the MGH function.

Example Description

This library contains API for the Magneto 14 Click driver. The demo application reads and displays the magnet's angular position in degrees.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager (recommended), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.Magneto14

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MIKROE [compilers](#).

mikroSDK

This Click board™ is supported with [mikroSDK](#) - MIKROE Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[mikroBUS™](#)

[mikroSDK](#)

[Click board™ Catalog](#)

[Click boards™](#)

[ClickID](#)

Downloads

[Magnetio 14 click example on Libstock](#)

[Magnetio 14 click 2D and 3D files](#)

[MA735GGU datasheet](#)

[Magnetio 14 click schematic](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mikroe:](#)

[MIKROE-5751](#)