

INTERCONNECTS

SERIES 851 & 853 • .050" GRID LONG TAIL SOCKETS • SINGLE AND DOUBLE ROW STRIPS

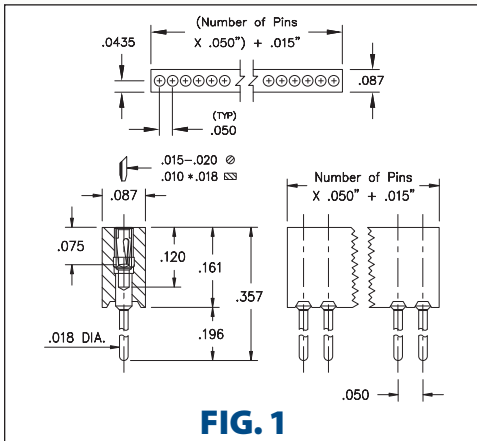


FIG. 1

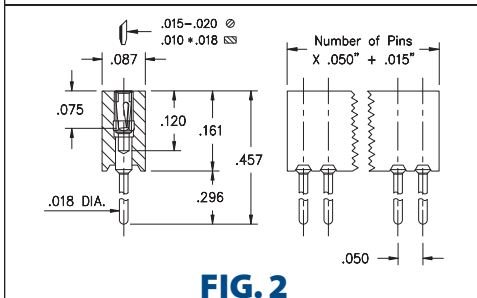


FIG. 2

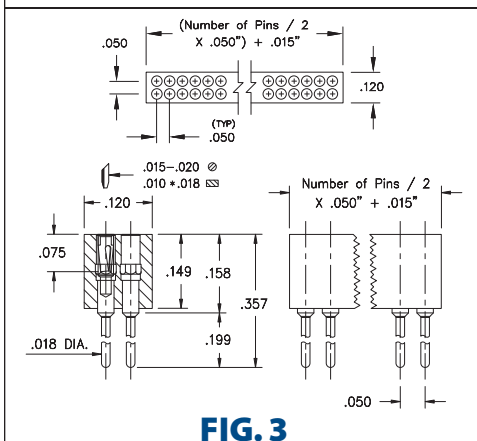


FIG. 3


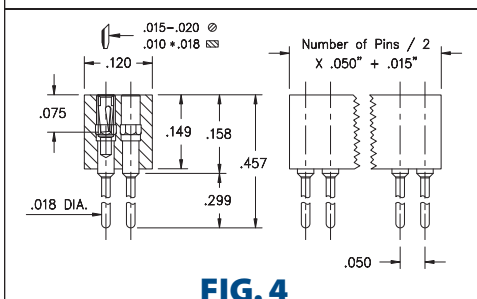


FIG. 4

- Series 851...011 and 853...011 use MM #4890-1 pins. See page 160 for details
- Series 851...021 and 853...021 use MM #4890-2 pins. See page 160 for details
- Receptacles use Hi-Rel, 3-finger BeCu #11 contact rated at 3 amps. (#11 contact accepts pin diameters from .015"-.020"). See page 251 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

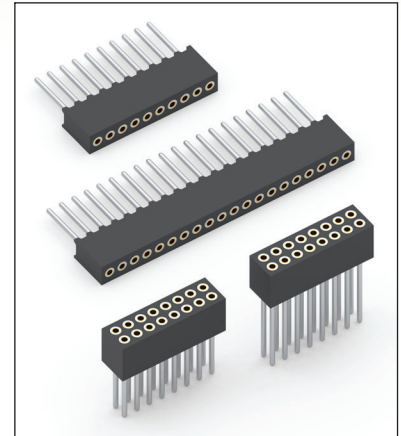

ORDERING INFORMATION

FIG. 1	Series 851...011	Single Row Socket
	851-XX-0	-10-011000 Specify number of pins 01-50
FIG. 2	Series 851...021	Single Row Socket
	851-XX-0	-10-021000 Specify number of pins 01-50
FIG. 3	Series 853...011	Double Row Socket
	853-XX-	-10-011000 Specify number of pins 004-100
FIG. 4	Series 853...021	Double Row Socket
	853-XX-	-10-021000 Specify number of pins 004-100
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Sleeve (Pin)		41 43
Contact (Clip)		200 μ " Sn 200 μ " Sn
		10 μ " Au 30 μ " Au

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[851-43-050-10-011000](#) [851-43-050-10-021000](#) [853-43-100-10-011000](#) [853-43-100-10-021000](#)