

SPRING-LOADED CONNECTORS

SERIES 856, 857 • 1,27 GRID TARGET CONNECTORS FOR SPRING-LOADED ASSEMBLIES • SINGLE AND DOUBLE ROW STRIPS

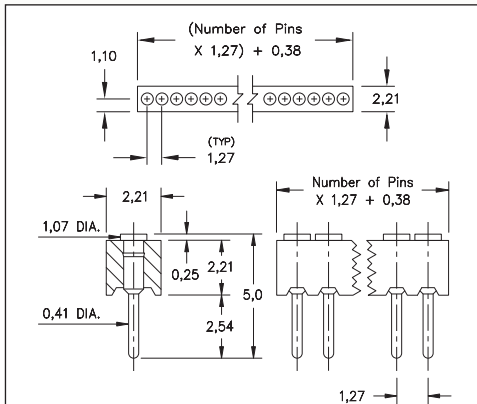


FIG. 1

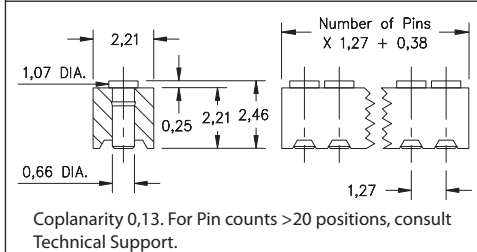


FIG. 2

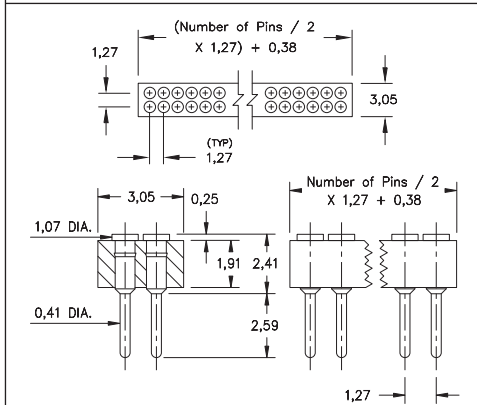


FIG. 3



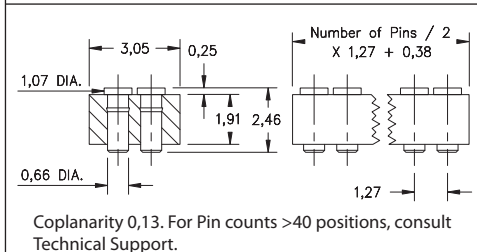


FIG. 4

- Series 856 and 857 Spring Target Connectors, supplied in single and double row strips
- Spring Target Connectors present a large flat surface for making contact with our standard 0,48 dia. spring pin plungers. The target connectors provide an excellent gold-plated conductive path back to the board-mounted spring pin connector
- Target connectors use MM #1933 and #1935 pins. See page 213 for details
- Insulators are high temperature thermoplastic

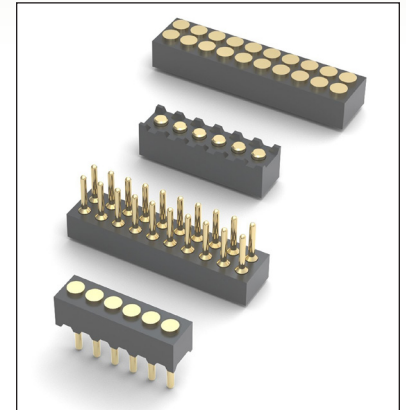

ORDERING INFORMATION

FIG. 1	Series 856...051	Standard Solder Tails
	856-10-0	-10-051000 Specify number of pins 01-20
FIG. 2	Series 856...051	Surface Mount
	856-10-0	-30-051000 Specify number of pins 02-20
FIG. 3	Series 857...051	Standard Solder Tails
	857-10-0	-10-051000 Specify number of pins 04-40
FIG. 4	Series 857...051	Surface Mount
	857-10-0	-30-051000 Specify number of pins 04-40
RoHS-2 2011/65/EU XX=Plating Code See Below For Electrical, Mechanical & Environmental Data, See page 264		
SPECIFY PLATING CODE XX=		
Pin Plating 		
10 		
0,25µm Au		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[856-10-003-30-051000](#) [856-10-007-30-051000](#) [856-10-013-30-051000](#) [856-10-019-30-051000](#) [856-10-017-30-051000](#) [856-10-011-30-051000](#)