

Fig. 1

- Series 335 and 435 single and double row PCB interconnects offer the lowest profile available 1,78.
- Series 364 and 464 single and double row PCB interconnects offer 2,16 profile above board.
- Series 335 and 435 use MM #3516 pins. See page 179 for details.
- Series 364 and 464 use MM #6458 pins. See page 180 for details.
- Insulators are high temp. thermoplastic.

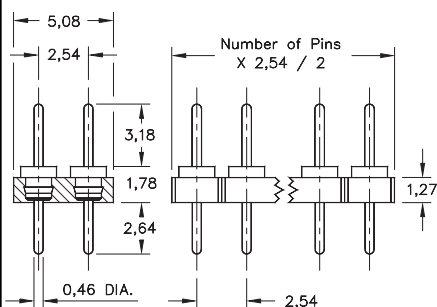
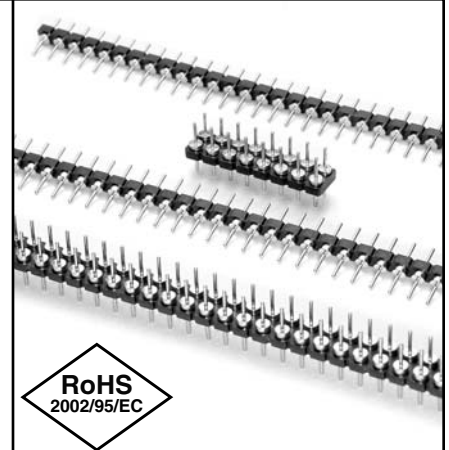


Fig. 2

Fig. 1

Single Row 1,78 Profile Pin Header

335-XX-1__-00-160000

Specify # of pins → 01-32

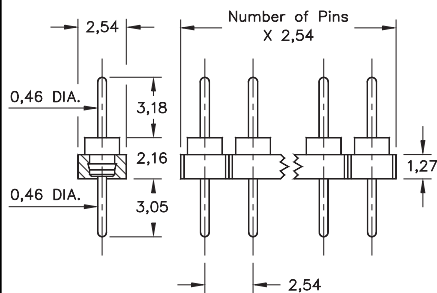


Fig. 3

Fig. 3

Single Row 2,16 Profile Pin Header

364-10-1__-00-580000

Specify # of pins → 01-32

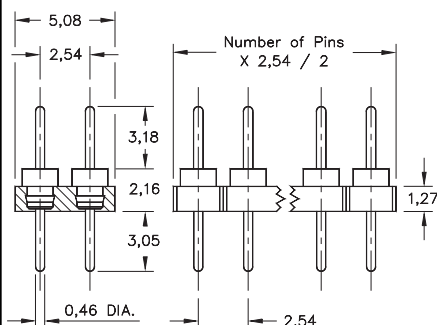


Fig. 4

Fig. 4

Double Row 2,16 Profile Pin Header

464-10-2__-00-580000

Specify # of pins → 02-72

For Electrical,
Mechanical & Environmental
Data, See pg. 4

XX=Plating Code
See Below

For RoHS compliance
select ◇ plating code.

SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	0,25μ Au	5,08μ Sn/Pb	5,08μ Sn	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[435-40-202-00-160000](#) [435-90-202-00-160000](#) [435-10-202-00-160000](#)