





DUAL-IN-LINE HEADERS

SERIES 162, 862 • GULL WING SHRINK DIP HEADERS & STRIPS, SMT SOLDER TAIL

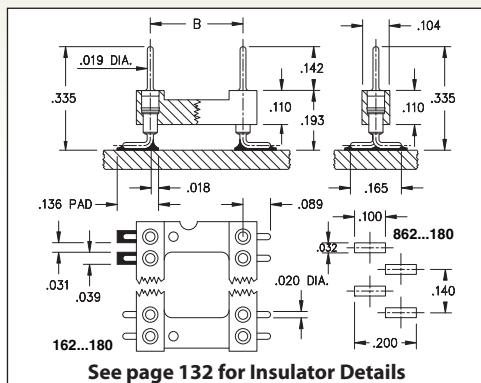

- Surface mount Gull Wing DIP sockets & strips for adapters and board stacking applications with .070" lead spacing
- Gull wing terminals provide maximum strength and permit easy visual inspection of solder joints
- Series 162 and Series 862 use MM #6218 pins. See page 208 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

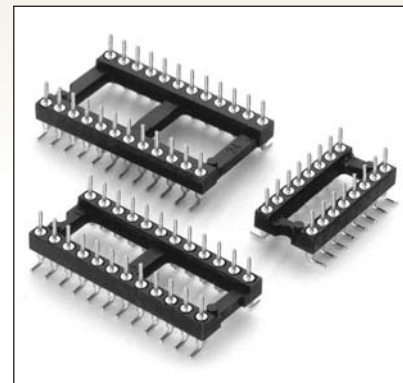

Total number of pins				Quantity per tube	ORDERING INFORMATION					
	A	B	C							
16	0.572	0.3	0.39	35	162-10-316-30-180000					
28	0.992	0.4	0.49	20	162-10-428-30-180000					
30	1.062	0.4	0.49	18	162-10-430-30-180000					
48	1.692	0.4	0.49	12	162-10-448-30-180000					
20	0.712	0.6	0.69	28	162-10-620-30-180000					
28	0.992	0.6	0.69	20	162-10-628-30-180000					
40	1.412	0.6	0.69	14	162-10-640-30-180000					
42	1.482	0.6	0.69	13	162-10-642-30-180000					
48	1.692	0.6	0.69	12	162-10-648-30-180000					
52	1.832	0.6	0.69	11	162-10-652-30-180000					
56	1.972	0.6	0.69	10	162-10-656-30-180000					
64	2.252	0.6	0.69	9	162-10-664-30-180000					
68	2.392	0.6	0.69	8	162-10-668-30-180000					
64	2.252	0.75	0.84	8	162-10-764-30-180000					
					XX=Plating Code See Below					
					RoHS 2002/95/EC					
					SINGLE ROW STRIP SOCKET If desired, we will supply any length up to 21 pins.					
21	1.482	---	.104	---	862-10-021-30-180000					
See page 264 for coplanarity information					SPECIFY PLATING CODE XX =		10 ◇			
					Pin Plating 		10 μ" Au			

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mill-Max:

[862-10-021-30-180000](#)