


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0010894267](#)
Status: **Active**
Overview: C-Grid Connector Products
Description: 2.54mm Pitch C-Grid Breakaway Header, High Profile, Dual Row, Right-Angle, 26 Circuits, 8.13mm Mating Pin Length, 0.76µm Gold (Au) Selective Plating

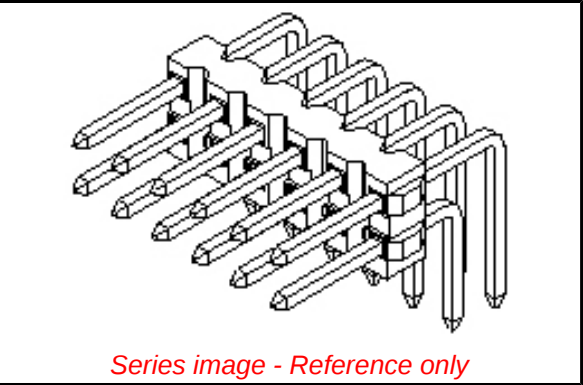

Documents:
[Drawing \(PDF\)](#) [Packaging Specification PK-70873-0075-001 \(PDF\)](#)
[Product Specification PS-70216-001 \(PDF\)](#) [Packaging Specification PK-70873-0353-001 \(PDF\)](#)
[Application Specification 713080001-AS-000 \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family PCB Headers
Series [70216](#)
Application Board-to-Board, Signal, Wire-to-Board
Overview [C-Grid Connector Products](#)
Product Name C-Grid
UPC 800753973527

Physical

Breakaway Yes
Circuits (Loaded) 26
Circuits (maximum) 26
Color - Resin Black
Durability (mating cycles max) 50
Flammability 94V-0
Glow-Wire Capable No
Lock to Mating Part None
Material - Metal Brass, Phosphor Bronze
Material - Plating Mating Gold
Material - Plating Termination Tin
Material - Resin Polyester
Net Weight 2.315/g
Number of Rows 2
Orientation Right Angle
PC Tail Length 2.79mm
PCB Locator No
PCB Retention None
Packaging Type Tube
Pitch - Mating Interface 2.54mm
Plating min - Mating 3.810µm
Plating min - Termination 3.810µm
Polarized to Mating Part No
Polarized to PCB No
Shrouded No
Stackable Yes
Temperature Range - Operating -40° to +105°C
Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 3.0A
Voltage - Maximum 250V

Solder Process Data

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Not Low-Halogen

For more information, please visit [Contact US](#)

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

[70216 Series](#)

Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	235

Material Info

Engineering Number	70216-0441
--------------------	------------

Reference - Drawing Numbers

Application Specification	713080001-AS-000
Packaging Specification	PK-70873-0075-001, PK-70873-0353-001
Product Specification	PS-70216-001
Sales Drawing	SD-70216-001-001

This document was generated on 09/13/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

10-89-4267