

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0878580003**
Status: **Active**
Overview: Milli-Grid Connector System
Description: 2.00mm Pitch Milli-Grid Breakaway Header, Surface Mount, Single Row, Vertical, with Peg, without Pick-and-Place Polyimide Tape, Tape on Reel Packaging, Mating Pin Length 6.00mm , 2 Circuits, Lead-Free

Documents:	
3D Model	Application Specification 503940001-AS-000 (PDF)
3D Model (PDF)	Packaging Specification PK-87858-300-000 (PDF)
Drawing (PDF)	Test Summary 877610000-TS-000 (PDF)
Product Specification PS-87761-100-001 (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification


UL E29179

General

Product Family	PCB Headers
Series	87858
Application	Signal, Wire-to-Board
Overview	<u>Milli-Grid Connector System</u>
Product Name	Milli-Grid
UPC	822350917414

Physical

Breakaway	Yes
Circuits (Loaded)	2
Circuits (maximum)	2
Color - Resin	Black
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	None
Mated Height	6.00mm
Material - Metal	Copper Alloy
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	0.074/g
Number of Rows	1
Orientation	Parallel
PC Tail Length	2.80mm
PCB Locator	Yes
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface	2.00mm
Pitch - Termination Interface	2.00mm
Plating min - Mating	2.540µm
Polarized to Mating Part	No
Shrouded	No
Stackable	No
Temperature Range - Operating	-55° to +105°C
Termination Interface: Style	Surface Mount

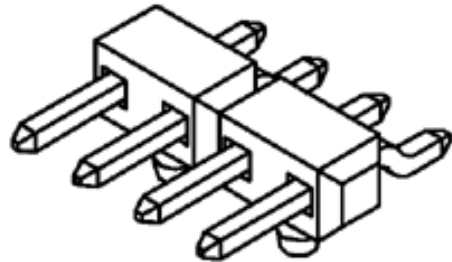

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2021)4569-DC (8
July 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

87858 Series

Mates With

2.00mm Single Row Receptacles

Electrical

Current - Maximum per Contact	2.0A
Voltage - Maximum	125V

Solder Process Data

Duration at Max. Process Temperature (seconds)	010
Lead-freeProcess Capability	REFLOW
Max. Cycles at Max. Process Temperature	003
Process Temperature max. C	260

Material Info

Reference - Drawing Numbers

Application Specification	503940001-AS-000
Packaging Specification	PK-87858-300-000
Product Specification	PS-87761-100-001
Sales Drawing	SD-87858-001-001
Test Summary	877610000-TS-000

This document was generated on 10/05/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Molex:](#)

[87858-0003](#)