

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0907790010

Status:

Active

Overview:

Picoflex Ribbon-Cable Connectors

Description:

Picoflex PF-50 Header, Vertical, Low Profile, High Temperature Surface Mount Capable, 20 Circuits, Glow-Wire Capable

Documents:

3D Model

Drawing (PDF)


3D Model (PDF)

Product Specification PS-99020-0011-001 (PDF)

Packaging Specification PK-90325-002-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification	
UL	E29179
Application tooling part link	
Application Tooling Part Link	69008-1070
General	
Product Family	PCB Headers
Series	90779
Application	Signal, Wire-to-Board
Comments	""""""This Molex product is manufactured from material that has the following ratings, tested by independent agencies:. a) A Glow Wire Ignition Temperature (GWIT) of at least 775 deg C per IEC 60695-2-13.. b) A Glow Wire Flammability Index (GWFI) above 850 deg C per IEC 60695-2-12.and hence complies with the requirements set out in the International Standard IEC 60335-1 5th edition - household and similar electrical appliances - safety, section 30 Resistance to heat and fire. <P><P> The customers using this product must determine its suitability for use in their particular application through testing or other acceptable means as described in end-product glow-wire flammability test standard IEC 60695-2-11 and any applicable product end-use standard(s). <P> If it is determined during the customer's evaluation of suitability, that higher performance is required, please contact Molex for possible product options.""""""""
Overview	Picoflex Ribbon-Cable Connectors
Product Name	Picoflex
UPC	800753666726
Physical	
Breakaway	No
Circuits (Loaded)	20
Circuits (maximum)	20
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	Yes
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin

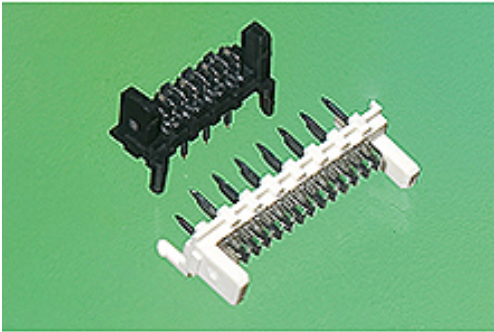

Series image - Reference only

EU ELV	
Not Relevant	
EU RoHS	China RoHS
Compliant	
REACH SVHC	
Not Contained Per - D(2021)4569-DC (8 July 2021)	
Halogen-Free	
Status	
Not Low-Halogen	
For more information, please visit <a href="#">Contact US</a>	
China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

90779 Series

Mates With

90327 IDT Connector

Application Tooling   FAQ	
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.	
Global	
Description	Product #
Extraction Tool for Picoflex PF-50 Connectors, 4-26 Circuits	690081070

Material - Resin	High Temperature Thermoplastic
Net Weight	0.832/g
Number of Rows	1
Orientation	Vertical
PCB Retention	Yes
PCB Thickness - Recommended	1.60mm
Packaging Type	Bag
Pitch - Mating Interface	1.27mm
Pitch - Termination Interface	1.27mm
Plating min - Mating	4.064µm
Plating min - Termination	4.064µm
Polarized to Mating Part	Yes
Polarized to PCB	Yes
Shrouded	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-40° to +105°C
Termination Interface: Style	Through Hole
<b>Electrical</b>	
Current - Maximum per Contact	1.2A
Voltage - Maximum	250V
<b>Solder Process Data</b>	
Lead-freeProcess Capability	WAVE
<b>Material Info</b>	
<b>Reference - Drawing Numbers</b>	
Packaging Specification	PK-90325-002-001
Product Specification	PS-99020-0011-001
Sales Drawing	SDA-90779-001

This document was generated on 12/15/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Molex:

90779-0010